

AQUALISA

eMOTION™

ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD

- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
- CHROME PLATED

MIDNIGHT BLACK

8.5KW MOBC85
9.5KW MOBC95
10.5KW MOBC105


ARCTIC WHITE

8.5KW MOWC85
9.5KW MOWC95
10.5KW MOWC105

SPACE GREY


8.5KW MOGC85
9.5KW MOGC95
10.5KW MOGC105

DIMENSIONAL DRAWINGS

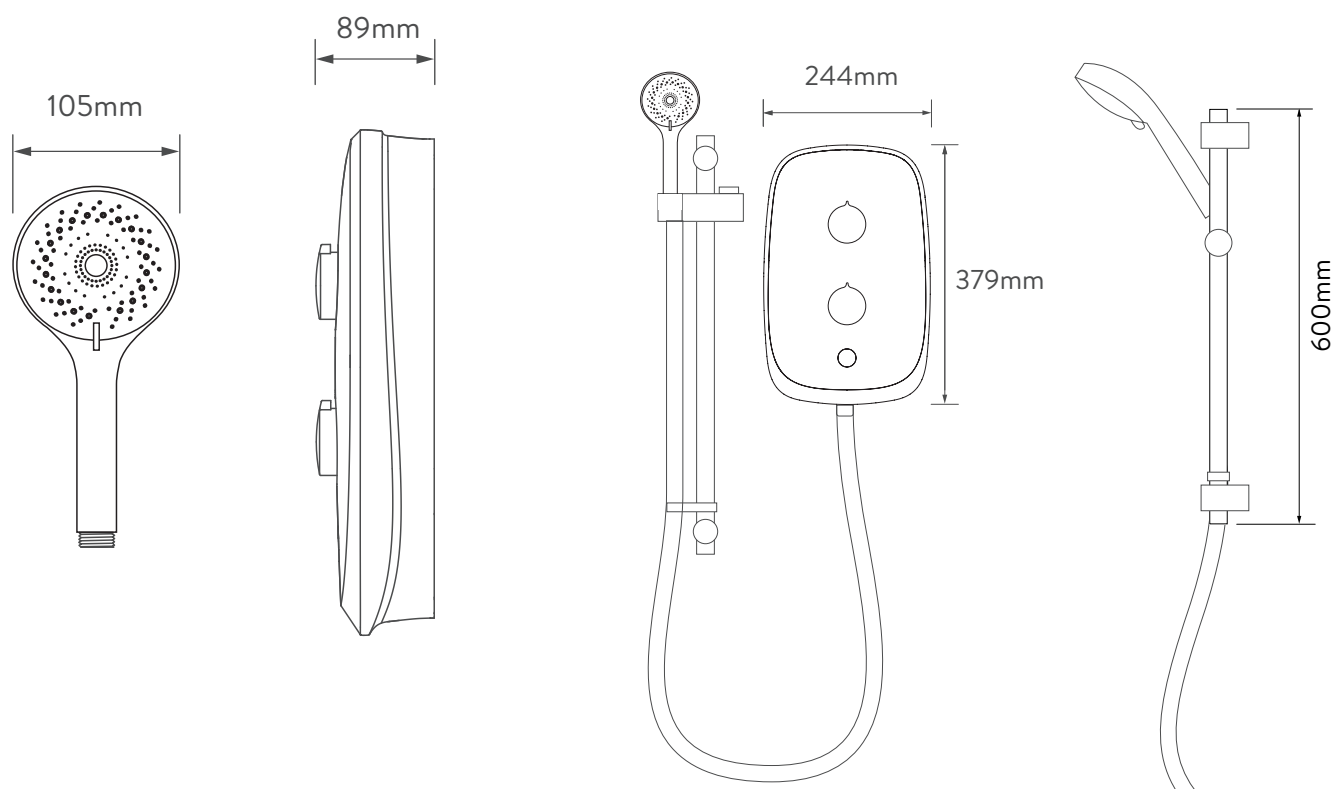

CONNECTIONS

 ELECTRICAL
 WATER

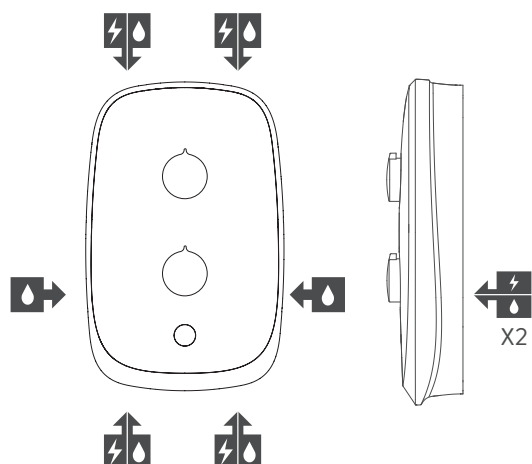

The company reserves the right to alter, change or modify the product or product specifications without prior warning.
Please refer to the installation guides for technical information.

Issue 03 February 2024

AQUALISA

eMOTION™

ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD
- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
- CHROME PLATED

MIDNIGHT BLACK	8.5KW	MOBC85
	9.5KW	MOBC95
	10.5KW	MOBC105
ARCTIC WHITE	8.5KW	MOWC85
	9.5KW	MOWC95
	10.5KW	MOWC105
SPACE GREY	8.5KW	MOGC85
	9.5KW	MOGC95
	10.5KW	MOGC105

TECHNICAL SPECIFICATIONS

Power	8.5KW / 9.5KW / 10.5KW
Minimum pressure	0.085 MPa (0.85 bar) Recommended: 1 bar
Maximum pressure	1.0 MPa (10 bar)
Recommended maximum pressure	3 bar
Water entry points	Right hand side and left hand side: top, bottom, side and rear
Cable entry points	Right hand side and left hand side: top, bottom and rear
Inlet fitting connections	15mm compression or push fit elbow
Outlet fitting connections	1/2" BSP thread
Electric requirements	Supply voltage 230 – 240V, MCB rating : 8.5KW and 9.5KW - 40A 10.5KW - 45/50A
Water system	Mains cold system
Features	Digital temperature display
	Push button start/stop
	Rotary controls (power control rotary control)
	Safety features: Phased shut down, Over temperature protection
	Low pressure indicator
	Stainless steel hose
	105mm handset, 3 spray patterns (splash or flow handset)
Colour	Midnight Black / Space Grey / Arctic White
Trim colour	Chrome Plated
Guarantee period	Shower unit – 2 years
	Shower head and kit – 2 years
Approvals	CE Marking
	BEAB
	European Water Label
	ERP Directive
	WRAS