TECHNICAL DATA SHEET

ARTISAN 3 DUAL CONTROL RANGE AR3 SHCV0 C


Product Specification


Product Code: Finish: Product Type: Construction: Cartridge Type: Supply: AR3 SHCVO C Chrome Contemporary Body is of brass construction Ceramic disc valve Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature. 15mm Compression connections Working pressures 0.2-5.0 Bar 10 Bar

Inlet Connections: Working Pressures: Maximum Static Pressure:

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°c
- Maximum hot water supply temperature is 80°c
- Flow rates at 0.2 Bar (open outlet without flow regulators) 8.0 l/min
- Fully serviceable from the front



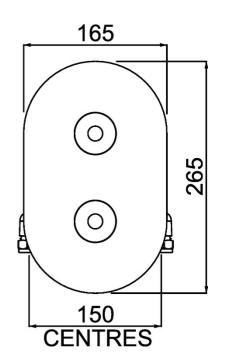

Technical Advice:

For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee:

5 years covering manufacturing faults.

System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar
AR3 SHCVO C - Outlet 1	3.9	7.5	14.1	21	30.5

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u>

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

BRISTAN

