

HP40/50-13-3PHMB

Heat Pump air/water 'inverter'

Dimensions

Height	850 mm
Depth	448 mm
Width	1388 mm
Weight Net	144 kg
Weight with Packaging	172 kg

Performance

Min/Max Operating Range (°C)	-25/+35
SCOP 35°C	4.49
SCOP 45°C	3.88
SCOP 55°C	3.30

35°C Flow

Maximum Output ⁽¹⁾

A-5°C W+35°C	14.00 kW
A0°C W+35°C	14.30 kW
A+7°C W+35°C	16.80 kW

Nominal Output ⁽²⁾

A-5°C W+35°C	11.20 kW
A0°C W+35°C	10.90 kW
A+7°C W+35°C	15.90 kW

45°C Flow

Maximum Output ⁽¹⁾

A-5°C W+45°C	13.40 kW
A0°C W+45°C	14.10 kW
A+7°C W+45°C	16.60 kW

Nominal Output ⁽²⁾

A-5°C W+45°C	10.70 kW
A0°C W+45°C	10.80 kW
A+7°C W+45°C	16.00 kW

55°C Flow

Maximum Output ⁽¹⁾

A-5°C W+55°C	12.60 kW
A0°C W+55°C	12.80 kW
A+7°C W+55°C	16.20 kW


Nominal Output ⁽²⁾

A-5°C W+55°C	9.98 kW
A0°C W+55°C	9.77 kW
A+7°C W+55°C	16.00 kW

Sound Pressure Level @1m	58.0 dB(A)
Sound Power Level (EN12102-1)	68.0 dB(A)



Clearances

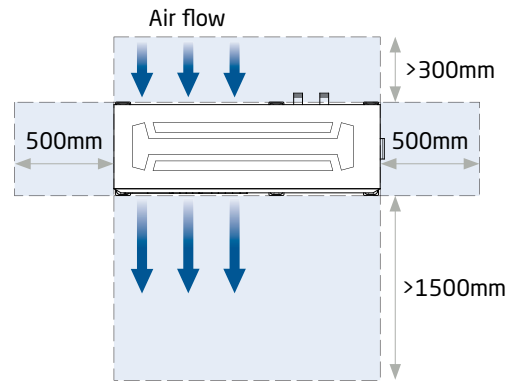

Electrical Details

Power Supply	380V-415V/3Ph/50Hz
MCA	12 A
TOCA	14 A
MFA	16 A

Hydronic Details

Flow/Return Connections	G 1 ¼"
Internal Expansion Vessel	8 L
Pre-Pressure	1.5 Bar
Maximum Water Pressure	3 Bar
Minimum System Volume	40 L

Refrigerant Circuit Details

Refrigerant	R32
Volume	1.75 kg
Compressor Type	Twin Rotary

For more information on Baxi ASHPs visit baxi.co.uk

Baxi may introduce modifications to their products from time to time. Consequently the details given in this data sheet are subject to alteration without notice.

(1) Output values tested at maximum compressor frequency

(2) Nominal output values under test conditions EN14825:2013

Selections and sizing offered by Baxi utilise nominal values unless otherwise stated.