




## Assembly

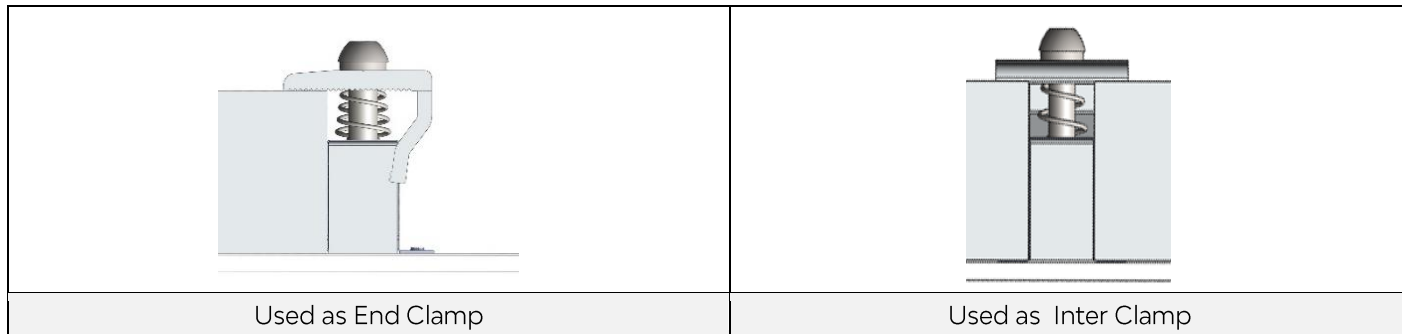

## Component

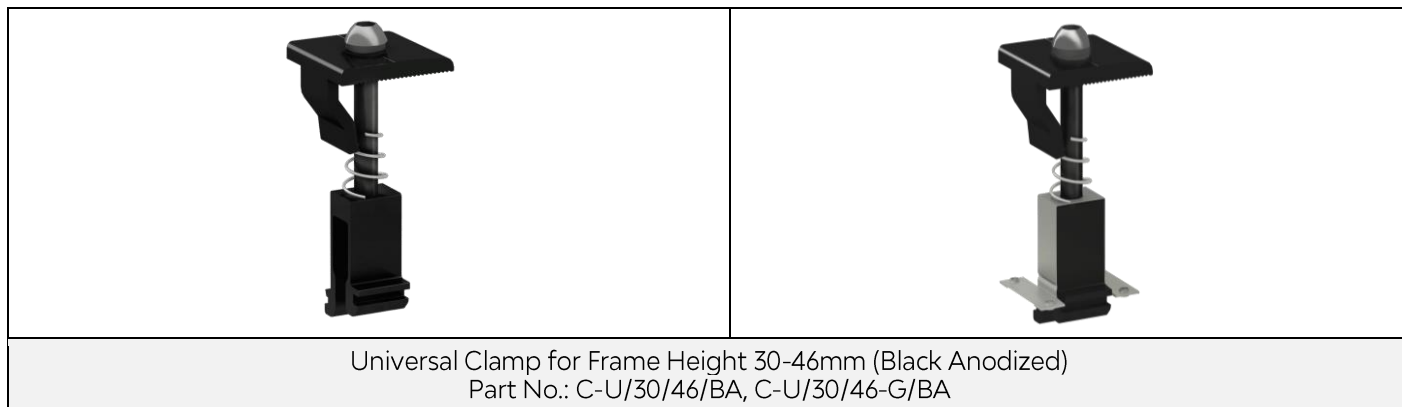

## Technical Specification

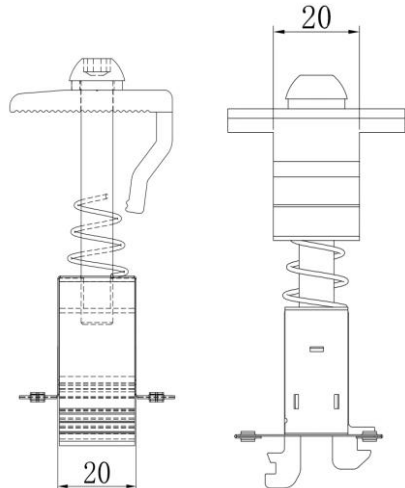Application	C-U/30/46/BA and C-U/30/46-G/BA are for framed PV Modules of 30-46mm in height	
Requirement	C-U/30/46/BA and C-U/30/46-G/BA need 20mm space on each side of the Rail, need 20mm space between PV Modules	
Recommended Torque	End Clamp: 13-14N•m Inter Clamp: 18-20N•m	
Weight	C-U/30/46/BA: 0.068 kg C-U/30/46-G/BA: 0.072 Kg	
Packaging	30 units per pack, 4 packs (120 units) per carton	
Material	Main parts: AL6005-T5 Fasteners and Grounding Clip: SUS 304	
Color	Black (full anodized, no less than 10 μm)	
Standard	GB50797   AS NZS1170.2-2011   EN1991   JISC8955   ASCE 7-10	