

# Vimark & tte

Product Catalogue  
June 2024



WIRING & CEILING ACCESSORIES | VENTILATION  
HAND DRYERS | CABLE | CONDUIT TUBE & FITTINGS

deta<sup>^</sup>

## Founded in 1958...

Deta Electrical is a market leading manufacturer and distributor of wiring, lighting, cable management and electrical installation accessories, with a reputation for unrivalled quality, reliability, service and value for money.

### Vimark

Steeped in over 25 years of history, Deta Electrical's long established Vimark brand holds a reputation for the supply of high quality, value for money electrical and wiring accessories. Offering a wide portfolio of products, including wiring accessories, motion sensors, ventilation, hand dryers, back boxes and electrosparcs, Vimark is a long established and trusted brand that supports electrical contractors with their everyday installation requirements.

### tte

TTE is a market leading brand of electrical conduit tube and fittings, combining the former Top Tubes Electrical and Stephen Glover businesses. With more than 50 years' experience, TTE has been specified and installed on many high-profile projects. TTE offers a reliable and best in class cable management solution that is fully compliant with British Standards.

## Mission & Core Values

Deta's mission is to use its passion and expertise to provide best-in-class products that meet and exceed ever-changing customer needs.

### Trusted

A brand trusted by customers, Deta is synonymous with high product quality, extensive product knowledge and exceptional customer service. Robust quality control throughout the development and manufacturing stages are key to delivering quality products.


### Progressive

Focused on continuous progression, Deta is committed to investment in innovation, product design and ease of installation. Digitalisation is at the heart of Deta's strategy, supporting stakeholder requirements and maximising its value chain.

### Sustainable

Deta is committed to protecting the environment for future generations, to building an inclusive community and to ensuring it acts in the best interests of society.


Think electrical, think... deta<sup>▲</sup>

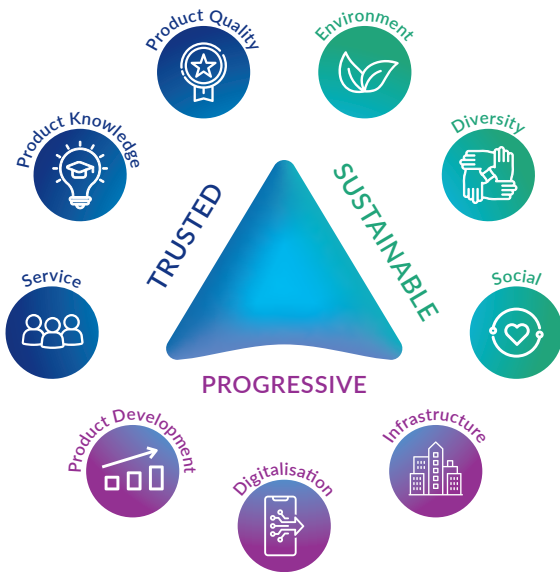

## Contents

Vimark	2
Vimark Curve	12
Metalclad	22
Euro Modules	30
Grid Switch	32
Ceiling Accessories	44
Boxes	50
Ventilation	54
Hand Dryers	60
PIR Detectors	64
Cables	66
TTE	70
Technical	84

DETA | VIMARK | TTE | BRACKENHEATH  
BRITICENT | CHANNEL | DETA.E | TIMEGUARD

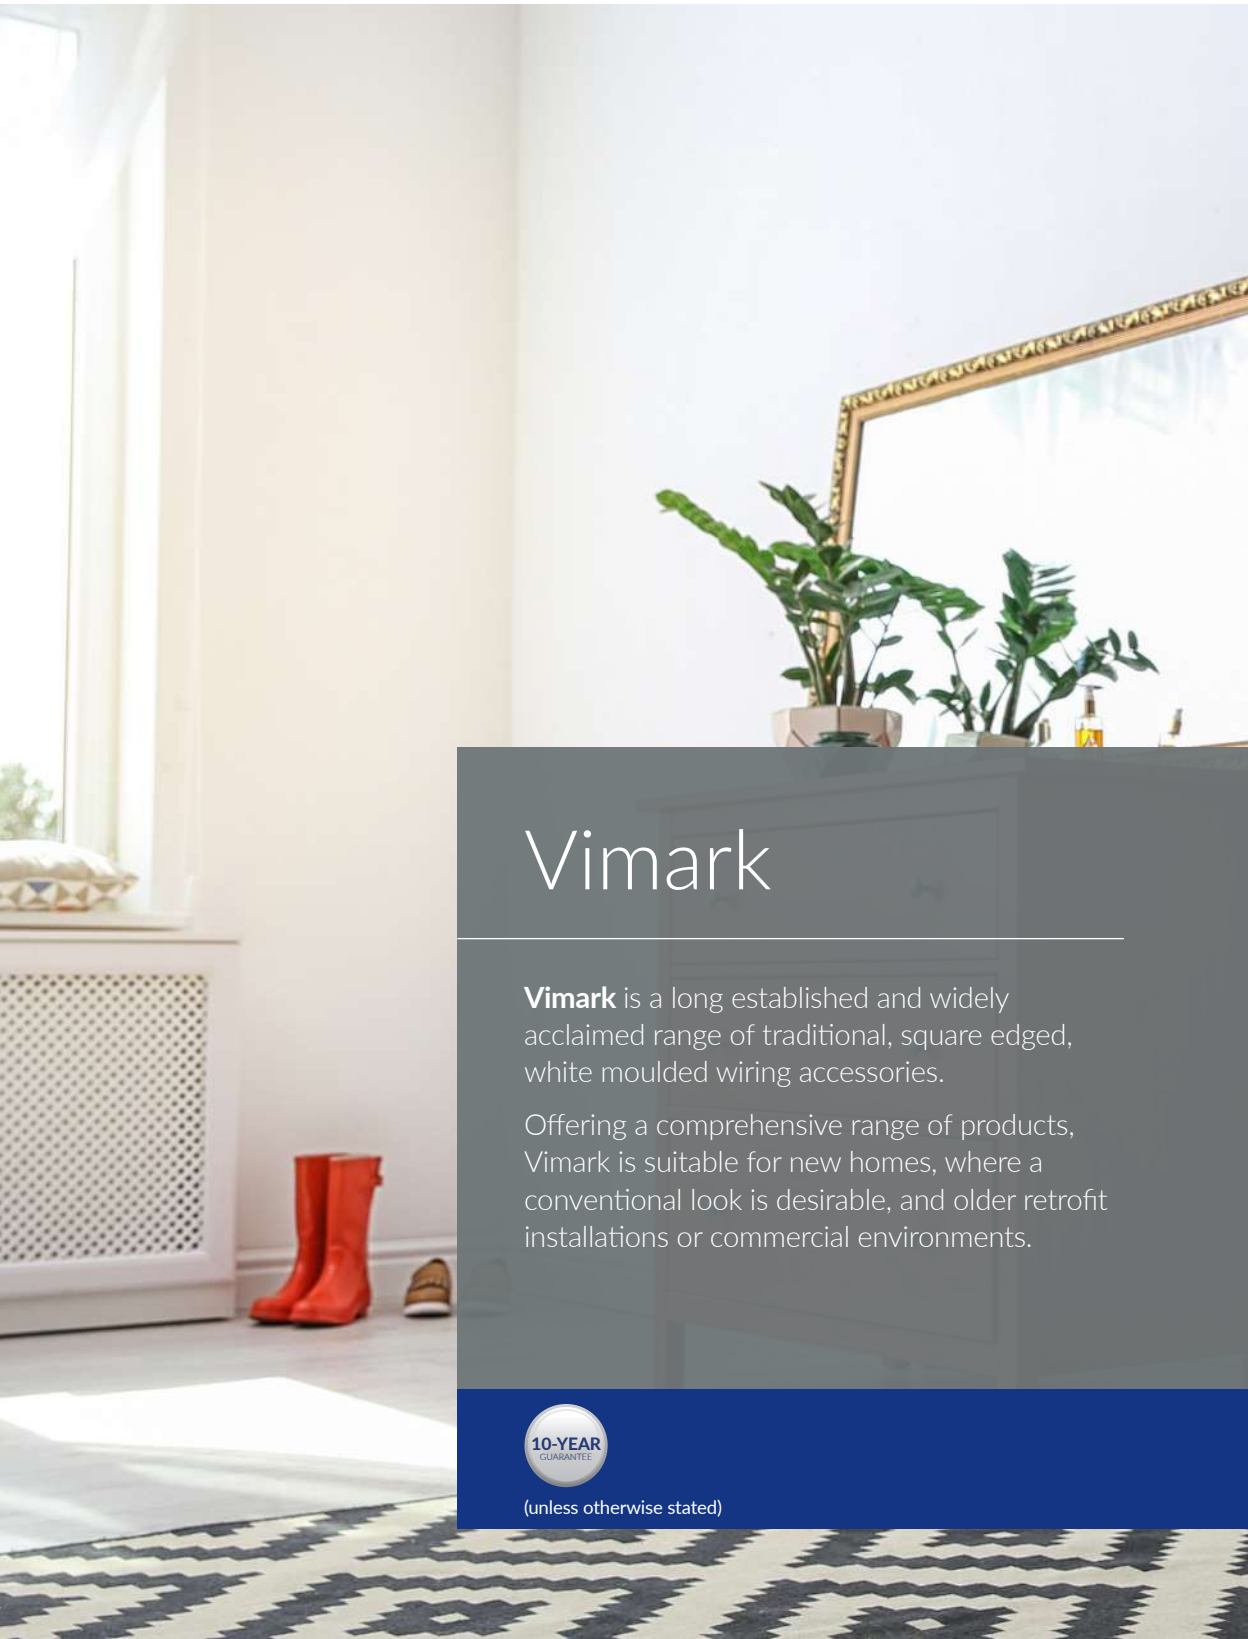

# Vimark

**Vimark** is a long established and widely acclaimed range of traditional, square edged, white moulded wiring accessories.

Offering a comprehensive range of products, Vimark is suitable for new homes, where a conventional look is desirable, and older retrofit installations or commercial environments.



(unless otherwise stated)






## Product Features

- ▲ TRADITIONAL DESIGN
- ▲ PROVEN QUALITY & VALUE
- ▲ FULL RANGE OF ACCESSORIES INCLUDING GRIDSWITCH OPTIONS AVAILABLE
- ▲ IDEAL FOR DOMESTIC AND COMMERCIAL BUILDINGS

**Vimark** is manufactured from heat resistant urea and under strict production control conditions.

Sockets are available with either single or double pole switches. Live and neutral plug pin contacts on sockets are shielded by earth pin operated safety shutters. Fixing screws are attached to the rear of the frontplate for easy access.


To ensure safe installation, the earth bar on the sockets is recessed, preventing accidental contact.

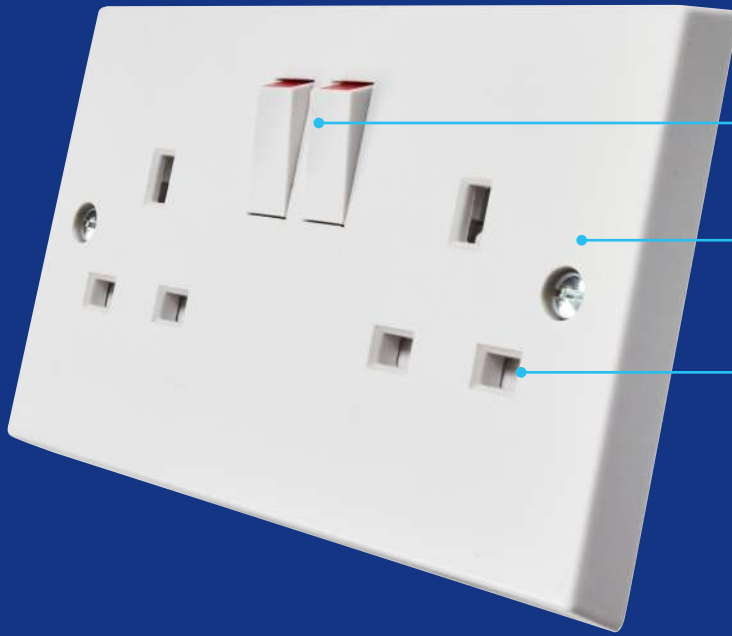

SP and DP switch options

Heat resistant urea frontplate

Earth pin operated shutters

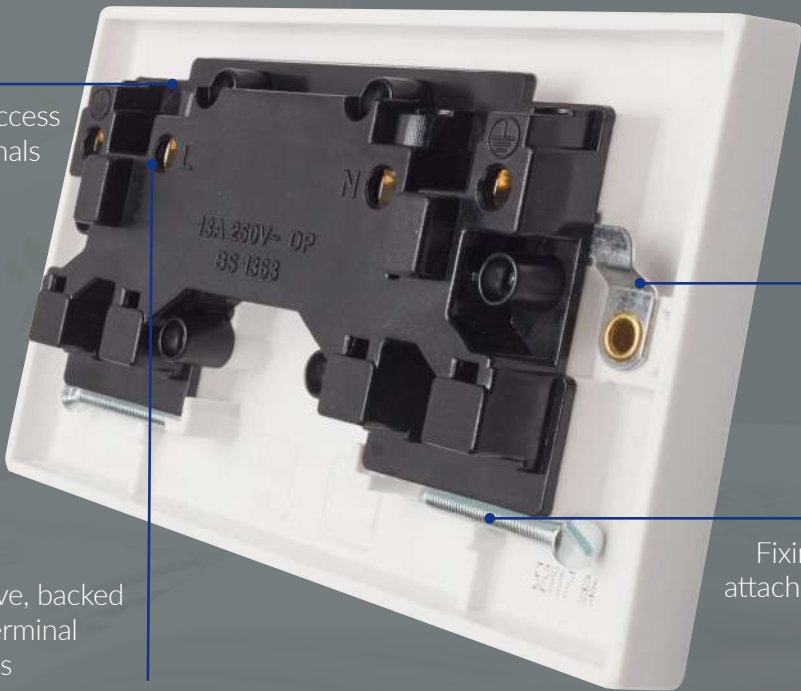

Top access terminals

Recessed earth bar

Captive, backed out terminal screws

Fixing screws attached to rear of plate

## Socket Outlets

- Twin earth terminals on 2 gang switched sockets
- Red flagged switch indicator
- In compliance with BS 1363: Part 2

### Unswitched - 13 Amp


- V1206 1 gang unswitched
- V1208 2 gang unswitched

### Single Pole - 13 Amp

- V1207S 1 gang switched
- V1207R 1 gang switched with recessed switch
- V1209S 2 gang switched
- V1209R 2 gang switched with recessed switches

### Double Pole - 13 Amp

- V1207SDP 1 gang switched
- V1207DPP\* 1 gang switched with neon
- V1209SDP 2 gang switched
- V1209DPP\* 2 gang switched with neon

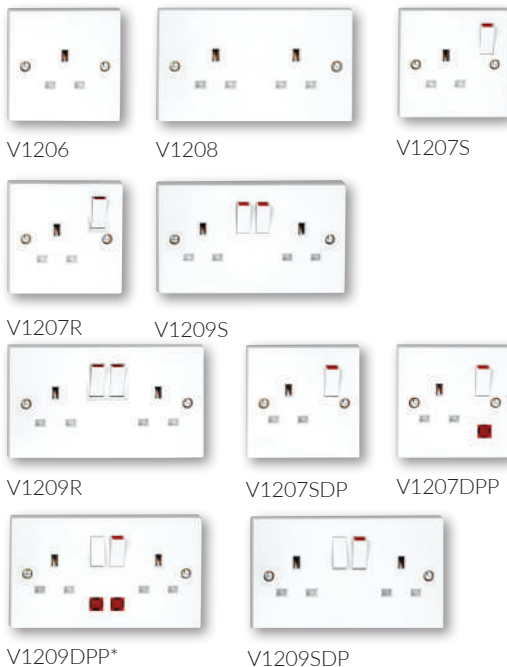

**Back Boxes** minimum recommended depth  
**1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm V1221  
**2g Flush** 25mm DB163 **Dry Lining** 35mm DB2541 **Surface** 25mm V1223

## USB Charging Socket Outlets



- USB ports deliver up to 2.4A simultaneous charging current across 2 ports
- In compliance with BS 1363: Part 2

### Single Pole 13 Amp + 2.4A USB

- V1398 2 gang switched and 2 USB charging ports



V1398

**Back Boxes** minimum recommended depth  
**2g Flush** 25mm DB163 **Dry Lining** 35mm DB2541 **Surface** 33mm V1224

## Round Pin Socket Outlets

- Earth pin operated safety shutters
- In compliance with BS 546

### Unswitched

- V1330\* 2A unswitched
- V1331 5A unswitched
- V1332\* 15A unswitched



V1330\* V1331 V1332

**Back Boxes** minimum recommended depth  
**1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm V1221

\*Special order product, minimum order quantity and lead time applies

# Plate Switches

- All plate switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Optional cord outlet (V1247)
- In compliance with BS EN 60669-1

## 10 Amp

V1202	1 gang 1-way
V1203	1 gang 2-way
V1204	2 gang 2-way
V1205	3 gang 2-way
V1244	4 gang 2-way
V1245	6 gang 2-way
V1246	Intermediate

## 10 Amp Press

V1249	1 gang 2-way press switch
V1249B*	1 gang 1-way press switch bell symbol

## 10 Amp 3 Pole Fan Isolator

V1247	3 pole fan isolator
-------	---------------------



V1202      V1203      V1204



V1205      V1244



V1245      V1246      V1249



V1249B\*      V1247

**Back Boxes** minimum recommended depth

**1-3g Flush** 16mm DB152    **Dry Lining** 35mm DB2540    **Surface** 16mm V1220E  
**4-6g Flush** 25mm DB163    **Dry Lining** 35mm DB2541    **Surface** 25mm V1223

# Architrave Switches

- In compliance with BS EN 60669-1

## 10 Amp

V1321	1 gang 2-way
V1322*	2 gang 2-way

## 10 Amp Press

V1323	1 gang 2-way press switch
-------	---------------------------

## Blank

V1326	1 gang
-------	--------



V1321      V1322      V1323      V1326

**Back Boxes** minimum recommended depth

**1g Flush** 27mm DB169    **Surface** 16mm V1324  
**2g Flush** N/A              **Surface** 16mm V1325

- Universal dimmers for use with dimmable LED, incandescent and halogen lamps
- Suitable for loads up to 250W LED, 350W incandescent and halogen
- Please refer to Technical Section on page 89 for further information on dimming loads
- Rotary push on/off dimmers for multiway dimming
- Electronic programming with EPROM memory chip
- Clear terminal markings
- Spare dimmer knobs available
- In compliance with BS EN 60669-2-1



V1414



V1415



SP0004WH

**Back Boxes** minimum recommended depth

**1g Flush** 35mm DB164 **Dry Lining** 35mm DB2540 **Surface** 33mm V1222

## Universal

**V1414** 1 gang multiway dimming

**V1415** 2 gang multiway dimming

## Dimmer Knob Spares

**SP0004WH** Dimmer knob (pack of 10) - white

# Connection Units

- Lockable, captive fuse carrier for safety isolation
- Engraving available to order
- Optional flex outlet on bottom edge
- 2 earth terminals
- In compliance with BS 1363: Part 4

## 13 Amp Unswitched

**V121013** Unswitched spur

**V1210P1** Unswitched spur with neon

## 13 Amp Switched


**V1211** Switched spur

**V1212** Switched spur with neon


## 3 Amp Unswitched

**V121003\*** Unswitched spur - 3A fuse

**V1210P3** Unswitched spur with neon - 3A fuse




V121013




V1210P1




V1211



V1212



V121003



V1210P3

**Back Boxes** minimum recommended depth

**1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm V1221

\*Special order product, minimum order quantity and lead time applies

## 20A Double Pole Switches

- Red flagged switch indicator
- Engraving available to order
- Twin brass earth terminals
- In compliance with BS EN 60669-1

### 20 Amp

<b>V1213</b>	Switch
<b>V1213WH</b>	Switch 'WATER HEATER'
<b>V1214</b>	Switch with neon
<b>V1214WH</b>	Switch with neon 'WATER HEATER'
<b>V1218P</b>	Dual switch with neon



V1213



V1213WH



V1214



V1214WH



V1218P

**Back Boxes** minimum recommended depth

**1g Flush** 35mm DB164 **Dry Lining** 35mm DB2540 **Surface** 33mm V1222

## 50A Double Pole Switches

- Twin brass earth terminals
- In compliance with BS EN 60669-1

### 50 Amp

<b>V1300</b>	Switch with red rocker
<b>V1300P</b>	Switch with red rocker and neon

### 50 Amp Tall

<b>V1301</b>	Tall switch with red rocker
<b>V1301P</b>	Tall switch with red rocker and neon



V1300



V1300P



V1301



V1301P

**Back Boxes** minimum recommended depth

**1g Flush** 47mm DB167 **Dry Lining** 46mm DB2542 **Surface** 45mm V1228  
**2g Flush** 47mm DB168 **Dry Lining** 46mm DB2543 **Surface** 45mm V1229

# Cooker Control Units

- Neon versions available
- 2 earth terminals
- In compliance with BS 4177

## Cooker Control

- V1302** 45A switch with red rocker + 13A switched socket
- V1302P** 45A switch with red rocker + 13A switched socket with neon

## Cooker Cable Outlet

- V1217** 45A cooker cable outlet



V1302

V1302P

V1217

**Back Boxes** minimum recommended depth

- 1g Flush** 47mm DB167 **Dry Lining** 46mm DB2542 **Surface** 45mm V1228
- 2g Flush** 47mm DB168 **Dry Lining** 46mm DB2543 **Surface** 45mm V1229

**Back Boxes - V1217** minimum recommended depth

- 1g Flush** 47mm DB167 **Dry Lining** 46mm DB2542 **Surface** 45mm V1228

# Shaver Socket



- Dual voltage outlet 240V/115V
- Neon indicator
- In compliance with BS 61558-2-5

## Shaver Socket

- V1305** Dual voltage with neon



V1305

**Back Boxes** minimum recommended depth

- 2g Flush** 47mm DB168 **Dry Lining** 46mm DB2543

# Telephone Outlets



- Screw terminals
- OfTel approved to NS/G/23/L/100005
- Surface mounted outlet dimensions 67 x 67mm, with pattress box

## Telephone Outlets - Surface Mounted

- V1350** Single master with pattress box
- V1351** Single secondary with pattress box



V1350



V1351



V1352

## Telephone Outlets - Flush Mounted

- V1352** Single master
- V1353** Single secondary
- V1354** RJ11



V1353



V1354

**Back Boxes** - minimum recommended depth

- 1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm V1221

# TV Outlets



- Suitable for standard coaxial BS 3041 plug

## TV Outlets

V1264	Single coaxial isolated
V1265	TV/FM (DAB) diplexer
V1268	Single coaxial non-isolated



V1264      V1265      V1268

**Back Boxes** - minimum recommended depth

**1g** Flush 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm V1221

# Blank & Flex Connection Plates

- Dual terminals of live, neutral and earth on 20A/25A flex connection plates
- In compliance with BS 5733

## Blank Plates

V1200	1 gang
V1201	2 gang
V1326	1 gang - architrave



V1200      V1201      V1326

## Flex Connection Plates

V1215	20A flex outlet plate (central cord outlet with optional bottom entry, three pairs of terminals, cord grip)
V1216	25A flex outlet plate (optional bottom entry, three pairs of terminals, cord grip)
V1217	45A cooker cable outlet



V1215      V1216      V1217

**Back Boxes** minimum recommended depth

**1g** Flush 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm V1221  
**2g** Flush 25mm DB163 **Dry Lining** 35mm DB2541 **Surface** 25mm V1223

**Back Boxes - V1217** minimum recommended depth

**1g** Flush 47mm DB167 **Dry Lining** 46mm DB2542 **Surface** 45mm V1228

# Data Plates

- Accepts standard 50x25mm modules

## Data Plates

V1362	Two Module
V1364	Four Module



V1362      V1364

**Back Boxes** minimum recommended depth depending on modules and cable sizes

**1g** Flush 35mm DB164 **Dry Lining** 35mm DB2540 **Surface** 33mm V1222  
**2g** Flush 35mm DB165 **Dry Lining** 35mm DB2541 **Surface** 33mm V1224

Full range of Euro Modules, see page 30



# Vimark Curve

**Vimark Curve** is a sleek and contemporary range of white moulded accessories, combining style and simplicity to blend seamlessly into the décor of any domestic or commercial building.

Offering a comprehensive range of accessories, Vimark Curve features a smooth, curved profile frontplate design on all products.



(unless otherwise stated)





## Product Features

- ▲ CONTEMPORARY DESIGN
- ▲ SMOOTH CURVED PROFILE
- ▲ EASY INSTALLATION
- ▲ FULL RANGE OF ACCESSORIES INCLUDING GRIDSWITCH OPTIONS AVAILABLE
- ▲ IDEAL FOR DOMESTIC AND COMMERCIAL BUILDINGS

**Vimark Curve** is designed with the installer in mind. The back of the accessories feature bold terminal markings making it easier to identify the terminals. Terminals on sockets are top facing and have large lead-ins with captive and backed out screws to aid cable installation.

To ensure safe installation, the earth bar on the sockets is recessed to prevent accidental contact and all plates incorporate soft edges to avoid damaging cable insulation.

All accessories are supplied with fixing screw caps and neon lenses are discreet to provide for a neat installation.




Curved rockers

High quality heat resistant frontplate

Fixing screw caps colour matched to plate

Earth pin operated shutters

High grade urea frontplate with antimicrobial properties

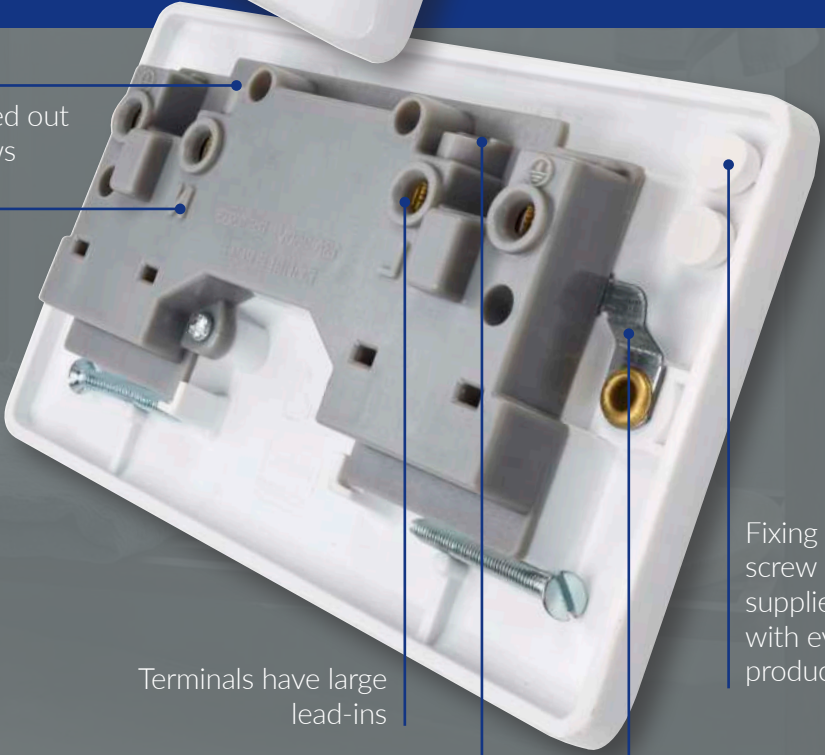

Captive, backed out terminal screws

Bold terminal markings

Terminals have large lead-ins

Top access terminals

Fixing screw caps supplied with every product

Recessed earth bar

# Socket Outlets

- Recessed earth bar
- Captive and backed out terminals
- Single and double pole switched versions
- 2 earth terminals on 2 gang sockets
- Only one size 4mm screwdriver needed
- In compliance with BS 1363: Part 2

## Unswitched - 13 Amp

- VC1206 1 gang unswitched
- VC1208 2 gang unswitched

## Single Pole - 13 Amp

- VC1207S 1 gang switched
- VC1207R\* 1 gang switched with recessed switch
- VC1209S 2 gang switched
- VC1209R\* 2 gang switched with recessed switches

## Double Pole - 13 Amp

- VC1207SDP 1 gang switched
- VC1207DPP\* 1 gang switched with neon
- VC1209SDP 2 gang switched
- VC1209DPP\* 2 gang switched with neon



VC1206



VC1208



VC1207S



VC1207R



VC1209



VC1209R



VC1207SDP



VC1207DPP



VC1209SDP



VC1209DPP

**Back Boxes** minimum recommended depth

**1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm VC1221  
**2g Flush** 25mm DB163 **Dry Lining** 35mm DB2541 **Surface** 25mm VC1223

# USB Charging Socket Outlets



- USB ports deliver up to 4.0A simultaneous charging current across 3 ports, up to a maximum of 3.0A per port
- Uses auto IC technology to detect connected devices and provide optimised high-speed charging
- Captive and backed out, top facing, terminals with large cable lead-ins and clear embossed and white printed markings
- In compliance with BS 1363: Part 2



VC1288

**Back Boxes** minimum recommended depth

**2g Flush** 25mm DB163 **Dry Lining** 35mm DB2541 **Surface** 33mm VC1224

## Single Pole 13 Amp + 2 Type A + 1 Type C USB

- VC1288 2 gang switched (2 Type A + 1 Type C USB)

\*Special order product, minimum order quantity and lead time applies

# Round Pin Socket Outlet

- Earth pin operated safety shutters
- Only one size 4mm screwdriver needed
- In compliance with BS 546



VC1331

## Unswitched

**VC1331** 5A unswitched

**Back Boxes** minimum recommended depth

**1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm VC1221

# Plate Switches

- All plate switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Only one size 4mm screwdriver needed
- In compliance with BS EN 60669-1

## 10 Amp

**VC1202** 1 gang 1-way  
**VC1203** 1 gang 2-way  
**VC1204** 2 gang 2-way  
**VC1205** 3 gang 2-way  
**VC1244** 4 gang 2-way  
**VC1245** 6 gang 2-way  
**VC1246** Intermediate



VC1202

VC1203

VC1204

VC1205



VC1244

VC1245

VC1246

## 10 Amp Press

**VC1249** 1 gang 2-way press switch  
**VC1249B** 1 gang 1-way press switch bell symbol



VC1249

VC1249B

VC1247

## 10 Amp 3 Pole Fan Isolator

**VC1247** 3 pole fan isolator

**Back Boxes** minimum recommended depth

**1-3g Flush** 16mm DB152 **Dry Lining** 35mm DB2540 **Surface** 16mm VC1220E  
**4-6g Flush** 25mm DB163 **Dry Lining** 35mm DB2541 **Surface** 25mm VC1223

- Universal dimmers for use with dimmable LED, incandescent and halogen lamps
- Suitable for loads up to 250W LED, 350W incandescent and halogen
- Please refer to Technical Section on pages 348-349 for further information on dimming loads
- Rotary push on/push off dimmers for multiway dimming
- Electronic programming with EPROM memory chip
- Spare dimmer knobs available
- In compliance with BS EN 60669-2-1



### Universal

- VC1414 1 gang multiway dimming
- VC1415 2 gang multiway dimming

### Dimmer Knob Spares

SP0004WH Dimmer knob (pack of 10) - white

## Connection Units

- Lockable, captive fuse carrier for safety isolation
- Neon leads enclosed
- 2 earth terminals
- Flex outlet option available
- In compliance with BS 1363:Part 4

### 13 Amp Unswitched

- VC1360 Unswitched spur
- VC1361 Unswitched spur with neon
- VC1364 Unswitched spur with bottom flex outlet

### 13 Amp Switched

- VC1370 Switched spur
- VC1371 Switched spur with neon
- VC1374 Switched spur with bottom flex outlet
- VC1375 Switched spur with neon and bottom flex outlet



**Back Boxes** minimum recommended depth  
**1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm VC1221

## 20A Double Pole Switches

- Neon leads enclosed
- 2 earth terminals
- Flex outlet option available
- In compliance with BS EN 60669-1

### 20 Amp

- VC1390 Switch
- VC1390WH Switch 'WATER HEATER'
- VC1391 Switch with neon
- VC1392 Switch with flex outlet
- VC1392WH Switch with flex outlet 'WATER HEATER'
- VC1393 Switch with neon and flex outlet
- VC1218P Dual switch with neon



**Back Boxes** minimum recommended depth  
**1g Flush** 25mm DB162 **Dry Lining** 35mm DB2540 **Surface** 25mm VC1221

## 50A Double Pole Switches


- Neon leads enclosed
- 2 earth terminals
- Flex outlet option available
- In compliance with BS EN 60669-1

### 50 Amp

- VC1300** Switch with red rocker  
**VC1300P** Switch with red rocker and neon

### 50 Amp Tall

- VC1301** Tall switch with red rocker  
**VC1301P** Tall switch with red rocker and neon

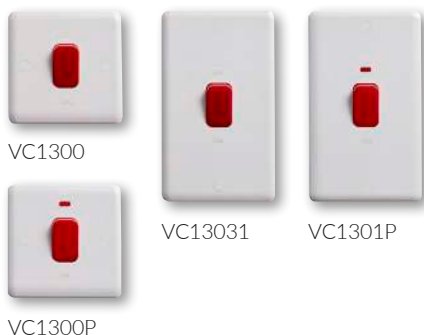

VC1300

VC13031

VC1301P

VC1300P

**Back Boxes** minimum recommended depth

**1g Flush** 47mm DB167 **Dry Lining** 46mm DB2542 **Surface** 45mm VC1228  
**2g Flush** 47mm DB168 **Dry Lining** 46mm DB2543 **Surface** 45mm VC1229

## Cooker Control Units

- 2 earth terminals
- In compliance with BS 4177

### Cooker Control

- VC1302** 45A switch with red rocker + 13A switched socket  
**VC1302P** 45A switch with red rocker and neon + 13A switched socket and neon

### Cooker Cable Outlet

- VC1217** 45A cooker cable outlet



VC1302

VC1302P

VC1217

**Back Boxes** minimum recommended depth

**1g Flush** 47mm DB167 **Dry Lining** 46mm DB2542 **Surface** 45mm VC1228  
**2g Flush** 47mm DB168 **Dry Lining** 46mm DB2543 **Surface** 45mm VC1229

**Back Boxes - VC1217** minimum recommended depth

**1g Flush** 47mm DB167 **Dry Lining** 46mm DB2542 **Surface** 45mm VC1228

## Shaver Sockets



- Dual voltage outlet 240V/115V
- Neon indicator
- Only one size 4mm screwdriver needed
- In compliance with BS EN 61558-2-5

### Shaver Socket

- VC1305** Dual voltage with neon



VC1305

**Back Boxes** minimum recommended depth

**2g Flush** 47mm DB168 **Dry Lining** 46mm DB2543

# Telephone Outlets



- IDC terminals on UK version
- Screw terminals on RJ11
- OfTel approved to NS/G/23/L/100005

## Telephone Outlets

- VC1352** Single master
- VC1353** Single secondary
- VC1354** Single RJ11



VC1352      VC1353      VC1354

**Back Boxes** minimum recommended depth  
**1g Flush** 25mm DB162    **Dry Lining** 35mm DB2540    **Surface** 25mm VC1221

# TV Outlets



- Suitable for standard coaxial BS 3041 plugs

## TV Outlets

- VC1264** Single coaxial isolated
- VC1265** TV/FM (DAB) diplexer
- VC1340** TV/FM (DAB) satellite triplexer



VC1264      VC1265      VC1340

**Back Boxes** minimum recommended depth  
**1g Flush** 25mm DB162    **Dry Lining** 35mm DB2540    **Surface** 25mm VC1221

# Blank & Flex Connection Plates

- Dual terminal of live, neutral and earth on 20A and 25A flex connection plates
- In compliance with BS 5733

## Blank Plates

- VC1200** 1 gang
- VC1201** 2 gang



VC1200      VC1201

## Flex Connection Plates

- VC1215** 20A flex outlet plate (central cord outlet with optional bottom entry, three pairs of terminals, cord grip)
- VC1216** 25A flex outlet plate (optional bottom entry, three pairs of terminals, cord grip)



VC1215      VC1216      VC1217

**Back Boxes** minimum recommended depth  
**1g Flush** 25mm DB162    **Dry Lining** 35mm DB2540    **Surface** 25mm VC1221  
**2g Flush** 25mm DB163    **Dry Lining** 35mm DB2541    **Surface** 25mm VC1223

## Cooker Cable Outlet

- VC1217** 45A cooker cable outlet

**Back Boxes - VC1217** minimum recommended depth  
**1g Flush** 47mm DB167    **Dry Lining** 46mm DB2542    **Surface** 45mm VC1228



## Data Plates

- Accepts standard 50x25mm modules

### Data Plates

VC1421	One module
VC1422	Two module
VC1424	Four module



VC1421



VC1422



VC1424

**Back Boxes** minimum recommended depth depending on modules and cable sizes  
**1g Flush** 35mm DB164 **Dry Lining** 35mm DB2540 **Surface** 33mm VC1222  
**2g Flush** 35mm DB165 **Dry Lining** 35mm DB2541 **Surface** 33mm VC1224

Full range of Euro Modules, see page 30



# Metalclad

**Metalclad** offers a tough and impact resistant range of accessories with frontplates that fit flush to the back box, gently curving rockers and discrete neon indicators.

With a durable finish and protective coating, accessories are designed to stand up to arduous duty in virtually any environment.

Ideal for use in all commercial and light industrial applications including workshops, factories, warehouses, laboratories and hospitals as well as domestic applications in lofts and garages.



(unless otherwise stated)





## Product Features

- ▲ IMPACT RESISTANCE
- ▲ DURABLE FINISH
- ▲ EASY INSTALLATION
- ▲ SUITABLE IN COMMERCIAL & LIGHT INDUSTRIAL ENVIRONMENTS.

**Metalclad** installation could not be simpler with clear markings, large cable lead-ins and captive backed out terminal screws.

Back boxes are supplied with all products (except blank plates) and incorporate 20mm knockouts on all sides and the rear, providing maximum flexibility.

Frontplates are packaged in a separate polybag to provide additional protection prior to second fix.




Durable finish with protective coating

Curved rockers

Flush fitting frontplate

Earth pin operated shutters

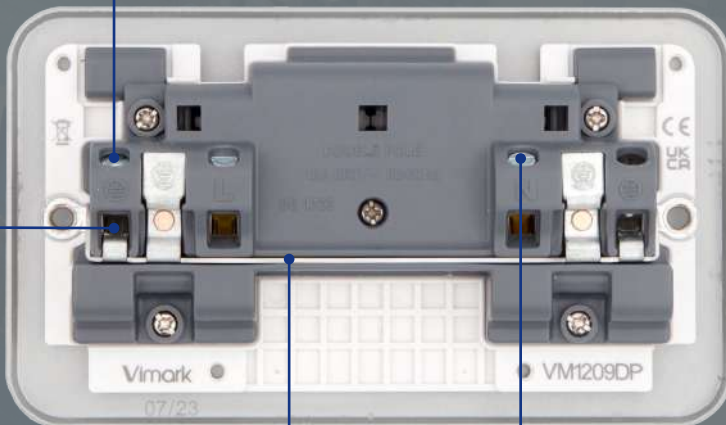

Top access terminals

Terminals have large lead-ins

Recessed earth bar

Captive, backed out terminal screws

# Socket Outlets

- Complete with surface mounting box
- Selected products available with and without side knockouts in mounting box
- Captive and backed out, top facing terminals with large cable lead-ins
- Recessed earth bar



VM1207DP



VM1209DP

## Single Pole - 13 Amp

- VM1207SP 1 gang switched
- VM1209SP 2 gang switched

### Knockouts

- 1g Sides 5 Rear 1
- 2g Sides 8 Rear 1

## Double Pole - 13 Amp

- VM1207DP 1 gang switched
- VM1209DP 2 gang switched

# USB Charging Socket Outlets



- Complete with surface mounting box
- USB ports deliver up to 4.8A simultaneous charging current across 2 ports (1 x Type C USB + 1 x Type A USB)
- Uses auto IC technology to detect connected devices and provide optimised high-speed charging
- Captive and backed out, top facing terminals with large cable lead-ins
- In compliance with BS 1363: Part 2



VM1289

### Knockouts

- 2g Sides 8 Rear 1

## Single Pole - 13 Amp + 4.0A USB

- VM1289 2 gang switched and 3 USB charging ports (1 Type A + 1 Type C)

\*Special order product, minimum order quantity and lead time applies

## Plate Switches

- All plate switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Complete with surface mounting box
- Selected products available with and without side knockouts in mounting box
- Captive and backed out, top facing terminals with large cable lead-ins and clear embossed markings
- Only one size 4mm screwdriver needed
- In compliance with BS EN 60669-1



VM1203



VM1204



VM1205

### Knockouts

1g Sides 5 Rear 1

2g Sides 8 Rear 1

### 10 Amp

VM1203 1 gang 2-way

VM1204 2 gang 2-way

VM1205 3 gang 2-way

## Connection Units

- Complete with surface mounting box
- Switched with concave rocker
- Terminals have clear embossed markings
- Captive and backed out, top facing terminals with large cable lead-ins
- Lockable, captive fuse carrier for safety isolation
- Neon leads enclosed
- 2 earth terminals
- In compliance with BS 1363-4



VM1360



VM1631



VM1362



VM1370



VM1371



VM1372



VM1373

### Knockouts

1g Sides 5 Rear 1

### 13 Amp Unswitched

VM1360 Unswitched spur

VM1361 Unswitched spur with neon

VM1362 Unswitched spur with flex outlet

### 13 Amp Switched

VM1370 Switched spur

VM1371 Switched spur with neon

VM1372 Switched spur with flex outlet

VM1373 Switched spur with neon and flex outlet

## 20A Double Pole Switches

---

- Complete with surface mounting box
- Terminals have clear embossed markings
- Red flagged switch indicator
- Captive and backed out colour coded terminals with large cable lead-ins
- 2 earth terminals
- Neon leads enclosed
- In compliance with BS EN 60669-1



VM1391

**Knockouts**  
1g Sides 5 Rear 1

### 20 Amp

VM1391 Switch with neon

## 50A Double Pole Switches

---

- Complete with surface mounting box
- Terminals have clear embossed markings
- Colour coded terminals with large cable lead-ins
- Red flagged switch indicator
- Neon leads enclosed
- 2 earth terminals
- In compliance with BS EN 60669-1



VM1300N

**Knockouts**  
1g Sides 5 Rear 1

### 50 Amp

VM1300N Switch with red rocker and neon

## Blank Plates

---

- In compliance with BS 5733

### 20 Amp

VM1200 1 gang  
VM1201 2 gang



VM1200



VM1201

\*Special order product, minimum order quantity and lead time applies



# Euro Modules

**Euro Modules** provide the flexible platform that caters for bespoke installation requirements.

Power, telephone, data and TV modules are available in white or black finishes with accompanying data plates.

Euro modules are easy to install and simply push-fit into media plates, providing a versatile solution for residential, commercial or industrial applications.



(unless otherwise stated)

# Modules

- 2-year guarantee for USB charging, telephone, data and TV modules
- 25-year guarantee for power modules

## USB Charging Modules

**S1443** USB charging outlet - 2 x 3A  
(1 Type A + 1 Type C)

**Back Boxes** must be 35mm deep

## Power Modules

**S1444\*** 13A socket 45°  
**S1446\*** 13A socket  
**S1447\*** 16A 250V German socket  
**S1448\*** 15A 125V American socket  
**S1449\*** 16A 250V French socket

**Back Boxes** must be 35mm deep

## Telephone Modules

**S1430** Single master  
**S1431** Single secondary  
**S1432** RJ11

## Data Modules

**S1433** RJ45  
**S1434** Cat 6

## TV Modules

**S1435** Coaxial male  
**S1436** Coaxial female "return"  
**S1442** Coaxial female "TV"  
**S1437** F Type  
**S1438** TV/FM (DAB) diplexer  
**S1439** TV/FM (DAB)/satellite triplexer  
**S1440** TV/FM (DAB)/satellite quadplexer  
**S1441** HDMI (1.4 for Full HD)

## Blank and Brush Modules

**S1425** Brush cable outlet - 2 module  
**S1428** Blank - 1/2 module  
**S1429** Blank - 1 module

Data modules also available in black. Please add suffix BK to catalogue no. e.g. S1428BK.



S1443



S1446



S1447



S1448



S1449



S1430



S1431



S1432



S1433



S1434



S1435



S1436



S1442



S1437



S1438



S1439



S1440



S1441



S1425



S1428



S1429

Power modules need to be installed in accordance with the current edition of the wiring regulations (BS7671 IET Wiring Regulations). ELV Modules and Power Modules must not be mixed in the same compartment.

\*Special order product, minimum order quantity and lead time applies

# Gridswitch

**Gridswitch** offers a flexible switch management solution for commercial and domestic applications.

Frontplates are available in Vimark and Curve wiring accessory ranges, with sizes ranging from 1 gang up to 12 gang, providing a versatile solution for the most demanding projects.

Available in plastic and metal finishes, the extensive range of modules includes switches (10A, 20A, double pole, key and marked), dimmers, fuses, neons and accessories.



(unless otherwise stated)





## Product Features


- ▲ PACKED IN ITS OWN PROTECTIVE BAG
- ▲ GRID FRAMES ARE SUPPLIED SEPARATELY
- ▲ FIXING SCREWS IN BAGS, ATTACHED TO REAR OF PLATES TO PREVENT SCRATCHING
- ▲ A COMPREHENSIVE RANGE OF FRONT LOADING SNAP-IN MODULES

**Gridswitch** offers a wealth of features across the range to ensure that installation is carried out with ease.

All modules have clear terminal markings and are front loading so they simply clip in place, which means they can easily be upgraded or replaced without removing the mounting grid frame.

Frontplates from  
1 gang to 12 gang sizes

Matching screws on  
decorative frontplates

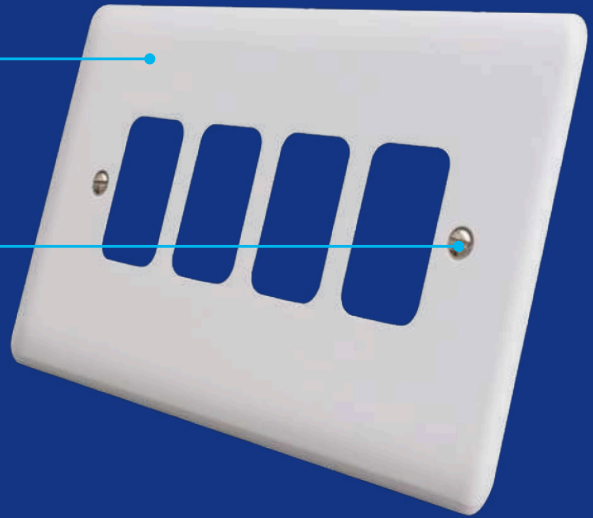


Extensive range of modules

Front loading  
snap-in modules

Modules available  
in a wide range of  
finishes to match  
the frontplate,  
and have an  
option of black  
or white inserts

Grid frame screws  
are captive

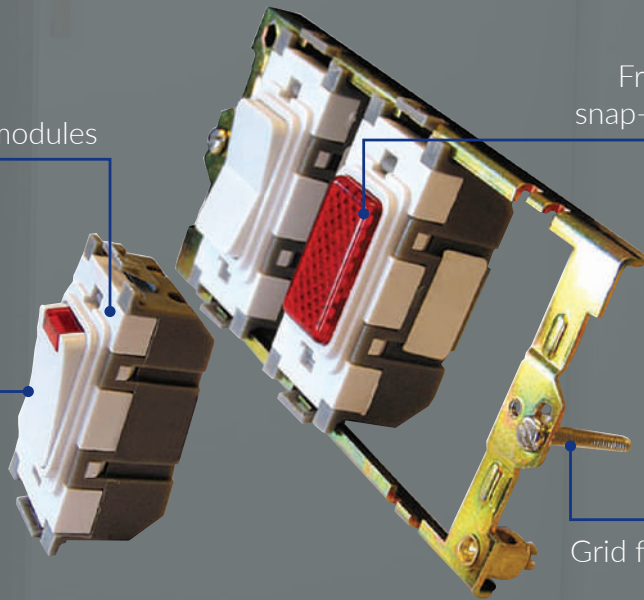

## Vimark Gridplates

- 1 gang to 12 gang sizes
- Grid frames supplied separately
- In compliance with BS 5733

### Vimark

G2601	1 gang
G2602	2 gang
G2603	3 gang
G2604	4 gang
G2605	6 gang
G2606	8 gang
G2607*	9 gang
G2608*	12 gang



G2601

G2602

G2603



G2605



G2607

## Vimark Curve Gridplates

- 1 gang to 8 gang sizes
- Grid frames supplied separately
- In compliance with BS 5733

### Vimark Curve

G2701	1 gang
G2702	2 gang
G2703	3 gang
G2704	4 gang
G2705	6 gang
G2706	8 gang



G2701



G2702



G2703



G2704



G2705



G2706

#### Back Boxes

A wide range of back boxes are available. Please see the Selection Chart on pages 84-87. We recommend using the deepest back box available to give the most amount of wiring space. Boxes for 6g and up to 24g have both 20mm and 25mm knockouts.


\*Special order product, minimum order quantity and lead time applies

# Frames

- 1, 2, 3, 4 and 6 modules
- 415V warning label is supplied with 3, 4 and 6 gang grid frames
- All grid frames have large earth terminals

## Grid Frames

<b>G3401</b>	1 module - for 1 gang plate
<b>G3402</b>	2 modules - for 2 gang plate
<b>G3403</b>	3 modules - for 3, 6 or 9 gang plate
<b>G3404</b>	4 modules - for 4, 8 or 12 gang plate



G3401



G3403



G3402



G3404

## 10A Single Pole

- Curved rockers
- Front loading into grid frame
- Switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Clear terminal markings
- Grey font marking
- Only one size 4mm screwdriver needed
- In compliance with BS EN 60669-1



G3501



G3502



G3503



G3503RD

### 10 Amp - White

G3501	1-way
G3502	2-way
G3503	2-way "PRESS"

### 10 Amp - Red Rocker

G3503RD*	2-way "PRESS" - white
G3503RDB*	2-way "PRESS" - black

Chrome and stainless steel finishes available with either black or white inserts. When ordering, please indicate finish and insert preference by adding suffix CH (chrome) or SS (stainless steel) and B (black) or W (white) to catalogue no. e.g. G3502CHW

\*Special order product, minimum order quantity and lead time applies

# 20A Single Pole

- Curved rockers
- Front loading into grid frame
- Switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Clear terminal markings
- Integral neon has flying leads so it can be wired as an indicator or a locator depending on load
- Only one size 4mm screwdriver needed
- In compliance with BS EN 60669-1



G3511



G3512



G3525



G3516



G3517



G3512RD

## 20 Amp - White

G3511	1-way
G3512	2-way
G3525*	2 way integral neon locator
G3513	Intermediate
G3516	2-way and off retractive
G3517	2-way and off latching

## 20 Amp - Red Rocker

G3512RD	2 way - white
G3512RDB*	2 way - black

Chrome and stainless steel finishes available with either black or white inserts. When ordering, please indicate finish and insert preference by adding suffix CH (chrome) or SS (stainless steel) and B (black) or W (white) to catalogue no. e.g. G3512CHW

## 20A Double Pole

- Curved rockers
- Front loading into grid frame
- Switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Clear terminal markings
- Only one size 4mm screwdriver needed
- In compliance with BS EN 60669-1



G3514



G3515



G3519



G3520



G3514RD

### 20 Amp - White

- G3514 Double pole
- G3515\* Neon in rocker
- G3519 Push to make
- G3520 Push to break

### 20 Amp - Red Rocker

- G3514RD Double pole - white
- G3514RDB\* Double pole - black

## 20A Double Pole Marked

- Curved rockers
- Front loading into grid frame
- Switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Clear terminal markings
- Grey font marking
- Only one size 4mm screwdriver needed
- In compliance with BS EN 60669-1



G3551



G3553



G3555



G3556



G3557



G3560



G3561



G3563



G3564

### 20 Amp - White & Black\*

- G3551 Oven
- G3552 Hob
- G3553 Extractor fan
- G3554 Washing machine
- G3555 Tumble dryer
- G3556 Dishwasher
- G3557 Fridge
- G3558 Freezer
- G3559 Boiler
- G3560 Cooker hood
- G3561 Microwave
- G3562 Fridge freezer
- G3563 Heater
- G3564 Waste disposal
- G3565 Fan boost
- G3566 Warming drawer
- G3567 Wine cooler

### Custom Markings

To support project requirements, Deta can provide a custom marking service to match stocked modules to cater to any requirement.

To order custom marked products, please contact the sales office who will be able to share details regarding lead times and minimum order quantities.

\*Special order product, minimum order quantity and lead time applies

# 20A Double Pole Marked with Neon

- Curved rockers
- Front loading into grid frame
- Switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Clear terminal markings
- Grey font marking
- Only one size 4mm screwdriver needed
- In compliance with BS EN 60669-1

## 20 Amp - White

G3571	Oven
G3572	Hob
G3573	Extractor fan
G3574	Washing machine
G3575	Tumble dryer
G3576	Dishwasher
G3577	Fridge
G3578	Freezer
G3579	Boiler
G3580	Cooker hood
G3581	Microwave
G3582	Fridge freezer
G3583	Heater
G3584	Waste disposal
G3585	Fan boost
G3586	Warming drawer
G3587	Wine cooler



G3571



G3572



G3573



G3574



G3575



G3576



G3577



G3578



G3579



G3580



G3581



G3582



G3583



G3584



G3585



G3586



G3587

# Key Switch

- Every switch supplied with a key
- 'Emergency Lighting Test' modules
- Front loading into grid frame
- Only one size 4mm screwdriver needed
- Switches are X-rated and can be used for switching inductive or fluorescent loads without de-rating
- Grey font marking
- In compliance with BS EN 60669-1



G3532



G3533



G3534



G3536



G3537



G3538



G3534RD

## 20 Amp - White

- G3532 2-way
- G3533 Intermediate
- G3534 Double pole
- G3536 2-way "Emg Lgt Test"
- G3537 2-way biased 1-way
- G3538\* Double pole "Emg Lgt Test"

## 20 Amp - Red

- G3534RD\* Double pole

# Dimmers



- Universal dimmers for use with dimmable LED, incandescent and halogen lamps
- Suitable for loads up to 250W LED, 350W incandescent and halogen
- Please refer to Technical Section on pages 89 for further information on dimming loads
- Rotary push on/push off dimmers for multiway dimming
- Electronic programming with EPROM memory chip
- Clear terminal markings
- Spare dimmer knobs available
- In compliance with BS EN 60669-2-1



G3526



SP0004WH

### Dimmer Modules

The quantity and maximum rating of dimmers fitted into a frontplate has to be limited to allow for heat dissipation.

## White

- G3526 Multiway dimming

## Dimmer Knob Spares

- SP0004WH Dimmer knob (pack of 10) - white

\*Special order product, minimum order quantity and lead time applies

# Accessories

- Front loading into grid frame
- Clear terminal markings
- Only one size 4mm screwdriver needed
- In compliance with BS 5733 and BS 1362



G3541



G3542



G3544

## White

- G3541** Flex outlet
- G3542** Fuse unit - 13 Amp
- G3544** Blank module

# Neons



- Front loading into grid frame
- Clear terminal markings
- Only one size 4mm screwdriver needed
- In compliance with BS 5733



G3543RD



G3543AM



G3543GR

## White

- G3543RD** Red, mains voltage
- G3543AM** Amber, mains voltage
- G3543GR** Green, mains voltage

# Ceiling Accessories

**Ceiling Accessories** include a wide range of high quality pendants, battens, lamp holders and ceiling switches, offering durability, reliability and ease of installation for any domestic or commercial application.







## Product Features


**Ceiling Accessories** offer a wealth of features to ensure that installation is fast and effortless.

Pendants and batters are offered with or without a unique patented clip-on “Decorator Cover” that shields live wires and terminals in the ceiling rose, making it safe for quick and easy decorating before the outer cover is screwed into position.


Safety lamp holders have a unique shutter action that retracts and shields the contact pins when a lamp is removed, providing complete protection and safety from live contacts. Safety pendants and batters are supplied complete with a “Decorator Cover” as standard.



### Decorator Cover

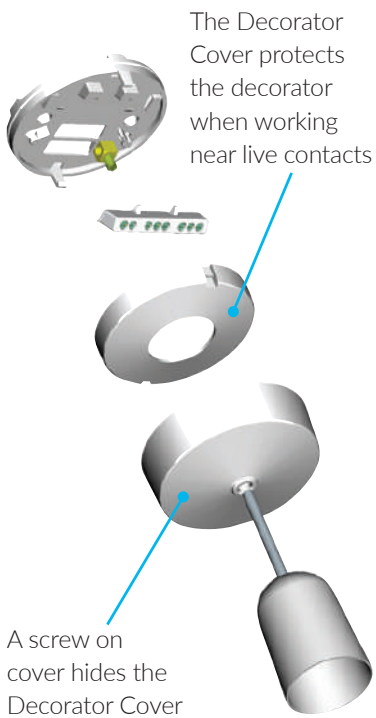

### Safety Lamp Holder

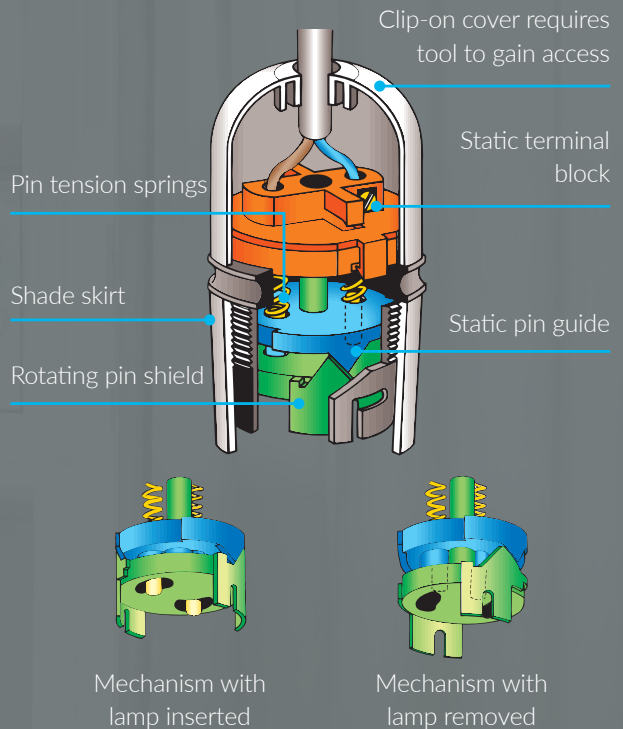

## Ceiling Rose and Lamp Holder

- 3 in-line terminals and earth terminal in ceiling rose
- T2 rated lamp holder with short skirt
- In compliance with BS EN 61184, BS 67

### Ceiling Rose

V1299 Ceiling rose

### Lamp Holder

91WSST2 Lamp holder



V1299

91WSST2


## Standard Pendants

- T2 rated lamp holder with short skirt
- In compliance with BS EN 61184, BS 67

### Standard Pendants

V1280 6" Pendant

V1283 9" Pendant

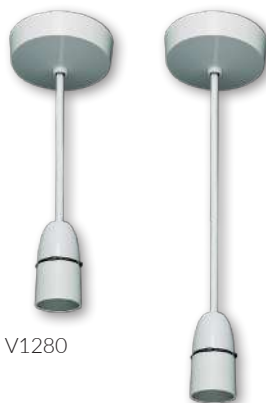

V1280

V1283

## Pendant and Battens with Decorator Cover

- T2 rated lamp holder with short skirt
- Decorator Safety Cover
- In compliance with BS EN 61184, BS 67
- Patent application pending

### Pendant with Decorator Cover

V1278 6" Pendant

### Batten Holder with Decorator Cover

V1289 Straight batten holder - home office skirt

97HOT2 Angled batten holder - home office skirt



V1278

V1289

97HOT2

## Safety Pendant and Battens with Decorator Cover

- Contact pins retractable when lamp is removed ensuring safety
- Decorator Safety Cover
- T2 rated lamp holder with short skirt
- B22 bayonet lamp holder
- 3 terminals in ceiling rose
- In compliance with BS EN 61184, BS 67

### Safety Pendant with Decorator Cover

**S1066T2** 6" Safety pendant

### Safety Batten Holder with Decorator Cover

**S96HOT2** Safety straight batten holder - home office skirt

**S97HOT2** Safety angled batten holder - home office skirt



S1066T2



S96HOT2



S97HOT2

## Ceiling Switches

- 1.5m cord drop
- In compliance with BS EN 60669-1

### Ceiling Switches

**V1297** 10A 2-way

**V1298** 50A Double pole with neon



V1297



V1298



# Boxes

**Boxes** include a comprehensive range of flush fitting metal and dry lining boxes, as well as surface mounted pattress boxes.



## Vimark Pattress Boxes

- Surface mounted
- Urea moulded pattress boxes
- Square corners to match Vimark and Slimline accessories
- In compliance with BS 5733
- 2g Pattress Boxes can be used as single flush to a 2g surface conversion box

### Vimark Pattress Boxes

<b>V1220E</b>	1 gang 16mm deep with earth terminal
<b>V1221</b>	1 gang 25mm deep
<b>V1223</b>	2 gang 25mm deep
<b>V1222</b>	1 gang 33mm deep
<b>V1224</b>	2 gang 33mm deep
<b>V1225</b>	1+1 gang 25mm deep
<b>V1226</b>	1+1 gang 33mm deep
<b>V1228</b>	1 gang 45mm deep
<b>V1229</b>	2 gang 45mm deep
<b>V1324</b>	1 gang 16mm deep architrave with earth terminal
<b>V1325*</b>	2 gang 16mm deep architrave with earth terminal



## Vimark Curve Pattress Boxes

- Surface mounted
- Urea moulded pattress boxes
- Rounded corners to match Vimark Curve accessories
- 2g pattress boxes can be used as single flush to a 2g surface conversion box
- In compliance with BS 5733

### Vimark Curve Pattress Boxes

<b>VC1220E</b>	1 gang 16mm deep with earth terminal
<b>VC1221</b>	1 gang 25mm deep
<b>VC1223</b>	2 gang 25mm deep
<b>VC1222</b>	1 gang 33mm deep
<b>VC1224</b>	2 gang 33mm deep
<b>VC1228</b>	1 gang 45mm deep
<b>VC1229</b>	2 gang 45mm deep



\*Special order product, minimum order quantity and lead time applies

## Dry Lining Boxes

- Flush mounted
- Suitable for plaster board thickness of 4-20mm
- In compliance with BS 4662

### Dry Lining Boxes

- DB2540 1 gang 35mm deep  
 DB2541 2 gang 35mm deep
- DB2542 1 gang 46mm deep  
 DB2543 2 gang 46mm deep
- DB2544 Round 34mm deep, 62mm diameter
- DB2545 1+1 gang 35mm deep  
 DB2546 2+1 gang 35mm deep

- Recommended for Ultra Flatplate and Ultra Screwless accessories

### Dry Lining Boxes - Flush Fitting

- DB2547<sup>†</sup> 1 gang 35mm deep  
 DB2548<sup>†</sup> 2 gang 35mm deep




DB2540

DB2541



DB2543

DB2544



DB2545

DB2546



DB2547<sup>†</sup>


DB2548<sup>†</sup>

Dry Lining Boxes - Cut Out	
1g	75mm x 75mm
2g	135mm x 75mm
Dual	161mm x 75mm
2+1g	221mm x 75mm
Round	63mm Dia.

### †Unique Product Feature

Unique lipless design

Allows flush fitting of  
Wiring Accessories



# Metal Boxes

- Flush mounting
- Adjustable lug
- DB169 has 16mm knockouts
- 25mm deep boxes have 20mm knockouts
- 35mm and 47mm deep boxes have 20mm and 25mm knockouts
- In compliance with BS 4662

## Metal Boxes

- DB152**     1 gang 16mm deep
- DB162**     1 gang 25mm deep
- DB163**     2 gang 25mm deep
- DB164**     1 gang 35mm deep
- DB165**     2 gang 35mm deep
- DB166**     1+1 gang 35mm deep
- DB167**     1 gang 47mm deep
- DB168**     2 gang 47mm deep
- DB169**     1 gang 27mm architrave fixed lugs
- DB170**     2+1 gang 35mm deep



## Gridswitch Metal Boxes

- DB171**     6/8 gang 42mm deep
- DB172**     9/12 gang 42mm deep
- DB173**     18 gang 60mm deep
- DB174\***    24 gang 60mm deep

Code	DB171	DB172	DB173	DB174*
20mm Knockouts	4	5	7	8
25mm Knockouts	4	5	7	8
Dimensions (mm)	132x132x42	132x192x42	192x192x60	192x250x60

# Grommets

	Open Standard	Closed Standard	Open Quick Fit	Closed Quick Fit
20mm (100 Pack)	<b>IM1301</b>	<b>IM1311</b>	<b>IM1321</b>	<b>IM1331</b>
25mm (50 Pack)	<b>IM1302</b>	<b>IM1312</b>	<b>IM1322</b>	<b>IM1332</b>
32mm (25 Pack)	<b>IM1303</b>	<b>IM1313</b>	<b>IM1323</b>	<b>IM1333</b>



# Ventilation

**Ventilation** includes an extensive range of 4" and 6" extractor fans and accessories that are designed to seamlessly blend into the environment and are suitable for various applications, including kitchens, bathrooms and utility rooms.

Slim profile fans are designed to be highly energy efficient and quiet to meet ventilation requirements. User adjustable timer and humidistat options providing an extra level of automation and effectiveness.

## Product Features

Ventilation fans meet the latest requirements for new and existing Building Regulations, including the requirements that cover minimum airflow, noise levels and controls.

Quiet and efficient, Vimark's fans adhere to noise level requirements as set out in Building Regulations Part F. Likewise, the fans operate below 0.5 watts per litre for intermittent extract ventilation systems, ensuring they meet minimum energy efficiency guidelines set within the Building Regulations Approved Document Part L1.

Vimark's fans are suitable for both wall or ceiling mounting, with installation designed to be Quick and easy.






### Performance Data

	<b>Axial Fans 100mm (4")</b>	<b>Axial Fans 150mm (6")</b>	<b>Flat Fascia Axial Fans 100mm (4")</b>	<b>Low Voltage Axial Fans 100mm (4")</b>	<b>Shower Fan 100mm (4")</b>
<b>Extraction Rate</b>	25l/s (90m <sup>3</sup> /hr)	71l/s (255m <sup>3</sup> /hr)	26l/s (92m <sup>3</sup> /hr)	24l/s (85m <sup>3</sup> /hr)	30l/s (107m <sup>3</sup> /hr)
<b>Specific Fan Power</b>	0.32W/l/s	0.40W/l/s	0.49W/l/s	0.34W/l/s	0.47W/l/s
<b>Sound Pressure Level (at 3m)</b>	29dB	35dB	34dB	28dB	33dB
<b>Power Consumption</b>	8W	28W	13W	8W	14W
<b>Supply Voltage (At 50Hz)</b>	240Vac	240Vac	240Vac	240Vac to transformer 12Vac to fan	240Vac
<b>Insulation Class</b>					
<b>IP Rating</b>	IP24	IP24	IP24	IP24	IPX4
<b>Maximum Running Temperature</b>	40°C	40°C	40°C	40°C	40°C
<b>Thermal Protection</b>	Thermal Fuse	Thermal Fuse	Thermal Fuse	Thermal Fuse	Thermal Fuse

## Axial Fans 100mm (4")



- Extraction rate 25 litres/second or 90m<sup>3</sup>/hr
- Specific fan power 0.32 W/l/s
- Noise Level 29dB @ 3m
- Overrun time delay, user settable between 2 and 30 mins
- Humidistat adjustable between 60-90% RH
- In compliance with BS EN 60335-2-80



### 100mm (4")


4600

- 4600 Standard
- 4601 Timer
- 4603 Timer and humidistat

## Axial Fans 150mm (6")



- Extraction rate 71 litres/second or 255m<sup>3</sup>/hr
- Specific fan power 0.4 W/l/s
- Noise Level 35dB @ 3m
- Overrun time delay, user settable between 2 and 30 mins
- Humidistat adjustable between 60-90% RH
- In compliance with BS EN 60335-2-80



### 150mm (6")


4660

- 4660 Standard
- 4661 Timer
- 4666\* Humidistat and shutter

## Flat Fascia Axial Fans 100mm (4")



- Extraction rate 26 litres/second or 92m<sup>3</sup>/hr
- Specific fan power 0.49 W/l/s
- Noise Level 34dB @ 3m
- Overrun time delay, adjustable between 2 and 30 mins
- In compliance with BS EN 60335-2-80



### 100mm (4")

4630


- 4630 Standard
- 4631 Timer

\*Special order product, minimum order quantity and lead time applies


# Low Voltage Axial Fans 100mm (4")



- Extraction rate 24 litres/second or 85m<sup>3</sup>/hr
- Specific fan power 0.34 W/l/s
- Noise Level 28dB @ 3m
- Overrun time delay, adjustable between 2 and 30 mins
- Humidistat user settable between 60-90% RH
- In compliance with BS EN 60335-2-80



Transformer dimensions



## 100mm (4")

- 4616** 12V low voltage fan and timer
- 4617** 12V low voltage fan with timer and humidistat

4616

# Shower Fans 100mm (4")




- Extraction rate up to 30 litres/second or 107m<sup>3</sup>/hr
- Specific fan power 0.47 W/l/s
- Noise Level 33dB @ 3m
- Over-run time delay adjustable between 2 and 30 minutes (timer versions)
- 3m (extended) flexible ducting
- Internal/external fixed louvres grilles
- In compliance with BS EN 60335-2-80



4640

External grille




## 100mm (4")

- 4640** Shower fan kit and timer
- 4641** Shower fan kit with timer and LED light - white and chrome cover supplied




4641

Internal grille



Internal grille with light



# Flexible Ducting

- PVC reinforced with spirally-wound steel wire

## 100mm (4") and 150mm (6")

- 4820** 100mm (4") 3m length
- 4827** 100mm (4") 6m length
- 4828** 100mm (4") 10m length
- 4880** 150mm (6") 3m length
- 4887** 150mm (6") 6m length



4820

4880

## Wall Fixing Kits

- For through-wall applications, includes gravity grille to prevent backdraughts
- Rigid ducting extendable from 20cm to 50cm

### 100mm (4") and 150mm (6")

4824 100mm (4") wall fixing kit  
 4884 150mm (6") wall fixing kit



4824 4884

## External Grilles

- Gravity grilles - designed to prevent backdraughts. For unexposed horizontal mounting only
- Fixed grilles - may be installed in horizontal or vertical planes and in exposed locations

### White/Brown

4821WH/4821BR 100mm (4") gravity grille  
 4881WH/4881BR 150mm (6") gravity grille  
  
 4822WH/4822BR 100mm (4") fixed grille  
 4882WH/4882BR 150mm (6") fixed grille



4821WH 4881WH 4882BR

## External Hoods

- Suitable for decoration of supply and exhaust vents used in public, residential and industrial ventilation systems
- Provides additional protection against wind and rain as well as birds and rodents
- Two-element structure for easy maintenance

### White/Brown

4831WH/4831BR 100mm (4") external hood  
 4891WH/4891BR 150mm (6") external hood



4831WH 4891BR

## Accessories

### Accessories

4845 100mm (4") back draught shutter  
 4846 100mm-150mm (4"-6") quick lock clamp  
 4849 Aluminium+PET Tape for Flexi Ducts - 10m



4845 4846 4849







# Hand Dryers

---

Improve hygiene and reduce energy consumption with Vimark **Hand Dryers**. High speeds ensure faster hand drying than conventional models.



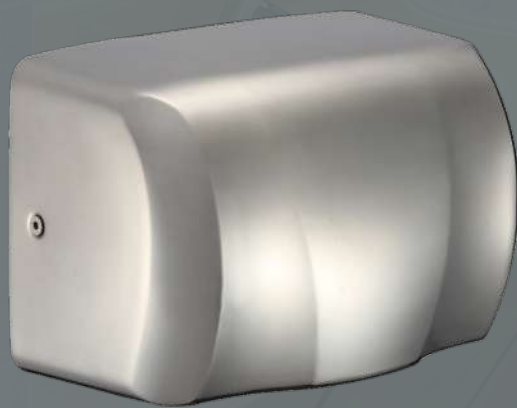

## 2.3kW Compact Hand Dryer

- High-quality, low maintenance hand dryer for commercial applications, e.g. offices and shops
- Constructed with sound and vibration reducing blocks to reduce noise level
- Automatic shut-off after 60 seconds when in use
- Self-resetting overheat thermostat provides protection from overheating if hand dryer becomes blocked



2.3KW  
AUTOMATIC  
20 SECONDS  
DRYING TIME

### Automatic - White

**1001WH** 2.3kW Compact automatic

1001WH

## 1.1kW Low Energy Hand Dryer

- Available in white or silver
- For use in schools, kitchens, restaurants and places where high levels of hygiene are required
- A high-speed, low power motor dries hands quickly to reduce energy consumption
- Changeable heat settings to suit environment
- Standby / Power-On LED indicator
- Provides 10 to 15 seconds drying time



1.1KW  
AUTOMATIC  
10-15 SECONDS  
DRYING TIME

### Automatic - White/Silver

**1016WH** 1.1kW high-speed - white  
**1016SL** 1.1kW high-speed - silver

1016WH

1016SL

## 1.8kW Heavy Duty Hand Dryer

- Available in white or polished chrome
- For use in schools, kitchens, restaurants and places where high levels of hygiene are required
- Standby / Power-On LED indicator
- Manufactured from grade 304 stainless steel
- Durable, vandal-resistant casing with tamper proof fixings included
- A high-speed, low power motor dries hands quickly to reduce energy consumption
- Adjustable heat settings to suit environment



1.8KW  
AUTOMATIC  
10-15 SECONDS  
DRYING TIME

### Automatic - White/Chrome

**1019WH** 1.8kW high-speed heavy duty - white  
**1019CH** 1.8kW high-speed heavy duty - chrome

1019WH

1019CH

## 1.0kW Compact High-Speed HEPA Hand Dryer

- Available in white or stainless steel
- Tough and compact model ideal for use in washrooms with limited wall space
- Manufactured from 1.2mm grade 304 stainless steel to protect against corrosion and vandalism
- Features a High-Efficiency Particulate Air (HEPA) filter for enhanced hygiene
- Advanced water-blasting technology delivering high-speed airflow

### Automatic - White/Stainless Steel

- 1011WH** 1.0kW compact HEPA - white  
**1011SS** 1.0kW compact HEPA - stainless steel

Height	Width	Depth
183mm	275mm	162mm



1011WH

1011SS

1.0KW  
 AUTOMATIC  
 10-12 SECONDS  
 DRYING TIME

### Replacement HEPA Filter

- SP1011** Replacement HEPA Filter



SP1011

## 1.5kW High-Speed Hand Dryer

- Available in white or stainless steel
- Robust and high-quality, ideal for medium usage commercial settings e.g. offices, shops, etc.
- Manufactured from 1.2mm grade 304 stainless steel to protect against corrosion and vandalism
- Advanced water-blasting technology delivering high-speed airflow
- Thermometer detects ambient temperature and auto-adjusts airflow temperature to reduce running costs
- Automatic shut off after 60 seconds to avoid wasted energy
- Self-resetting overheat thermostat provides protection from overheating if hand dryer becomes blocked



1012SS

1.5KW  
 AUTOMATIC  
 10-12 SECONDS  
 DRYING TIME

### Automatic - White/Stainless Steel

- 1012WH** 1.5kW high-speed - white  
**1012SS** 1.5kW high-speed - stainless steel

# PIR Detectors

Standalone **PIR detectors** designed for automatic control of lighting. Suitable for surface and flush mounting, and indoor and outdoor applications.



## 2 in 1 Universal PIR Detector



- Indoor/outdoor – suitable for surface or flush ceiling mounting
- Adjustable detection distance: 2m to 20m
- Ceiling mount height 2.2m - 4.0m approx.
- Maximum load 1000W (LED) / 2000W (Incandescent)
- Adjustable lux levels (< 10 to 2000 lux) and adjustable time setting (10sec ± 3sec, 15min ± 2min)



L2352

### 2 in 1 Universal PIR Detector

L2352 2 in 1 Universal PIR Detector

## 3 in 1 Outdoor PIR Detector



- Outdoor multi purpose PIR detector suitable for wall, ceiling or corner mounting
- Bidirectional detection angle up to 12m
- Mounting height - Walls (1.8m - 2.5m approx.), Ceiling (2.2m - 4.0m approx.)
- Maximum load 1000W (LED) / 2000W (Incandescent)
- Adjustable lux levels (< 10 to 2000 lux) and adjustable time setting (10sec ± 3sec, 15min ± 2min)



L2353BK



L2353WH

### 3 in 1 Universal PIR Detector

L2353BK 3 in 1 Universal PIR Detector - Black  
L2353WH 3 in 1 Universal PIR Detector - White

## Indoor Flush Mounted PIR Detector

- Indoor – suitable for flush ceiling mounting
- Detection distance up to 8m
- Ceiling mounting height 2.2m - 4.0m approx.
- Maximum load 300W (LED) / 1200W (Incandescent)
- Adjustable lux levels (< 10 to 2000 lux) and adjustable time setting (10sec ± 3sec, 15min ± 2min)
- Time delay and lux level adjustment controls are accessible via a concealed lid on the front of the fitting



L2354

### Indoor Flush Mounted PIR Detector

L2354 Indoor Flush Mounted PIR Detector

## Indoor Surface Mounter PIR Detector

- Indoor – suitable for surface ceiling mounting
- Detection distance up to 6m
- Ceiling mounting height 2.2m - 4.0m approx.
- Maximum load 1000W (LED) / 2000W (Incandescent)
- Adjustable lux levels (< 10 to 2000 lux) and adjustable time setting (10sec ± 3sec, 15min ± 2min)



L2355

### Indoor Surface Mounter PIR Detector

L2355 Indoor Surface Mounter PIR Detector





# Cables

---

A wide range of low voltage **cables**, including TV, alarm, telephone and data cables.

Coaxial and satellite cable includes shotgun cables and a range of CT100 cables approved to the CAI certification scheme benchmark.

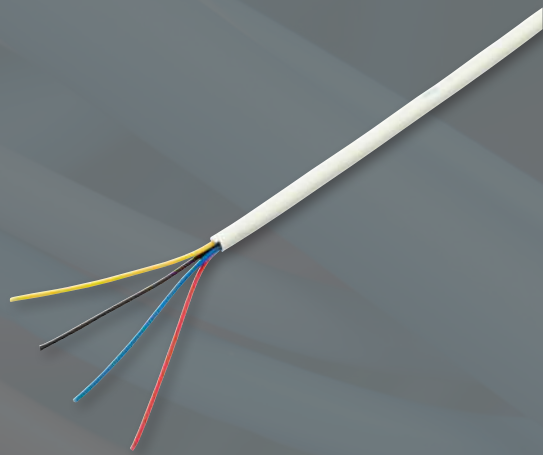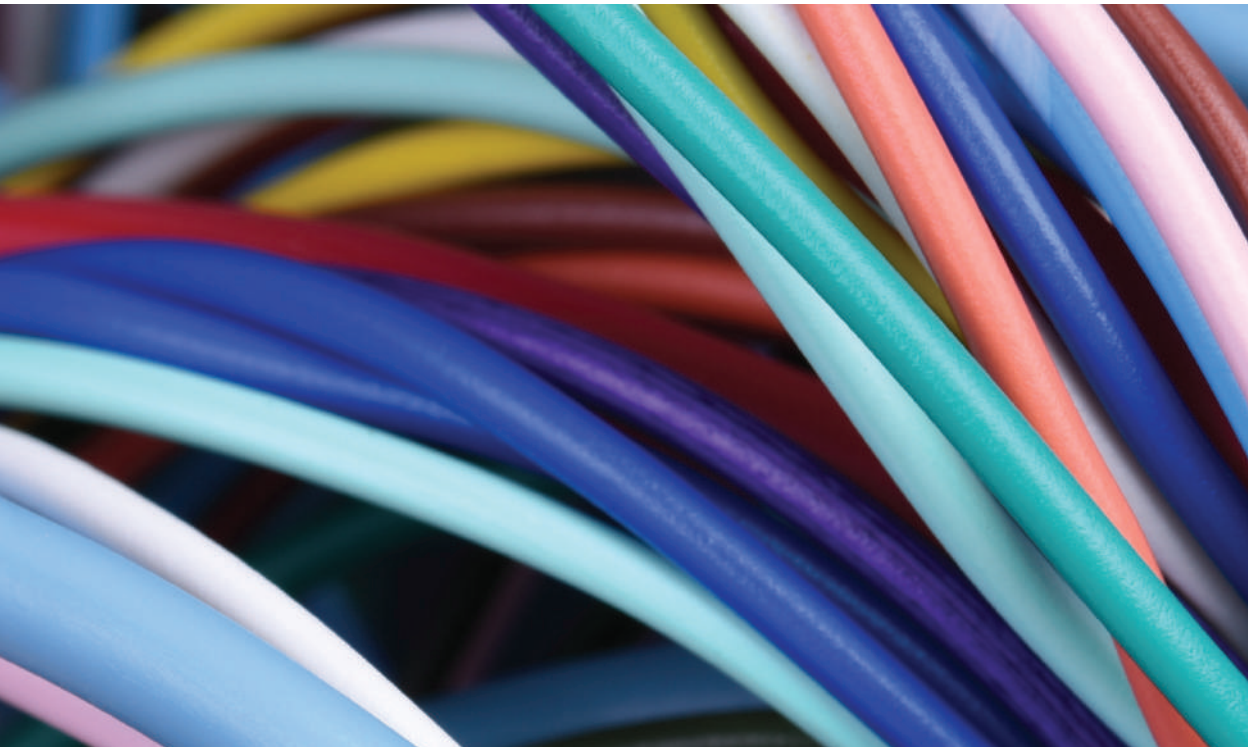

## Satellite Cables

- 100m and 250m reels
- High performance, low loss
- CAI certified
- Black sheath as standard, RG6 also in white
- For digital/satellite connection and high-speed data transfer

### RG6 Satellite Cable - 100m


- 532BK** RG6 75Ω 1/1.0mm conductor low-loss semi-air-spaced satellite down lead
- 532WH** RG6 75Ω 1/1.0mm conductor low-loss semi-air-spaced satellite down lead



532BK      532WH      534BK

### Satellite Cable

- 534BK** DT100 coaxial cable, for digital/satellite connection and high-speed data transfer (100m)
- 534B/250** DT100 coaxial cable, for digital/satellite connection and high-speed data transfer (250m)



534B/250      536BK

### Satellite Cable - Shotgun

- 536BK** DT100 shotgun coaxial cable (100m)
- 536B/250** DT100 shotgun coaxial cable (250m)

### CAI Approved Satellite Cable

- 535BK** CAI Approved CT100 coaxial cable (100m)
- 535B/250** CAI Approved CT100 coaxial cable (250m)

## CCTV Coaxial Cables

- TV down lead and CCTV applications
- 100m reel
- Low-loss

### RG59 CCTV - 100m

- 533BK** RG59 75Ω CCTV coaxial cable
- 538BK** RG59 75Ω CCTV coaxial + 2 core power cable



533BK

## Bell Wire

- 100m reels
- Bell Wire incorporates pit stripe

### Bell Wire - 100m

- 218** Bell wire




218

## Alarm Cables


- 100m reels
- White sheath

### Alarm Cable - 100m

- 630WH** 4 core alarm cable,  
colour coded red, blue, yellow, black
- 631WH** 6 core alarm cable,  
colour coded red, blue, yellow, black,  
white, green
- 632WH** 8 core alarm cable,  
colour coded red, blue, yellow, black,  
white, green, orange, brown



630WH



631WH

## CW1308 Telephone Cables

- 100m reels
- Complies with CW1308
- White sheath

### CW1308 Telephone Cable - 100m

- 19023** 3 pair
- 19024** 4 pair
- 19026** 6 pair



19023



19026

## Data Cables


- 305m pull box
- In compliance with TIA/EIA 568-B
- Copper conductor
- Grey sheath

### Cat 5e - 305m

- 542** Cat 5e solid unshielded twisted pair

### Cat 6 - 305m

- 550** Cat 6 solid unshielded twisted pair



542



550

## Data Cable Low Smoke Zero Halogen

- 305m pull box
- In compliance with TIA/EIA 568-B
- Copper conductor
- Purple sheath

### Cat 5e - 305m

- 544** Cat 5e solid unshielded twisted pair - LSZH

### Cat 6 - 305m


- 551** Cat 6 solid unshielded twisted pair - LSZH



544



551

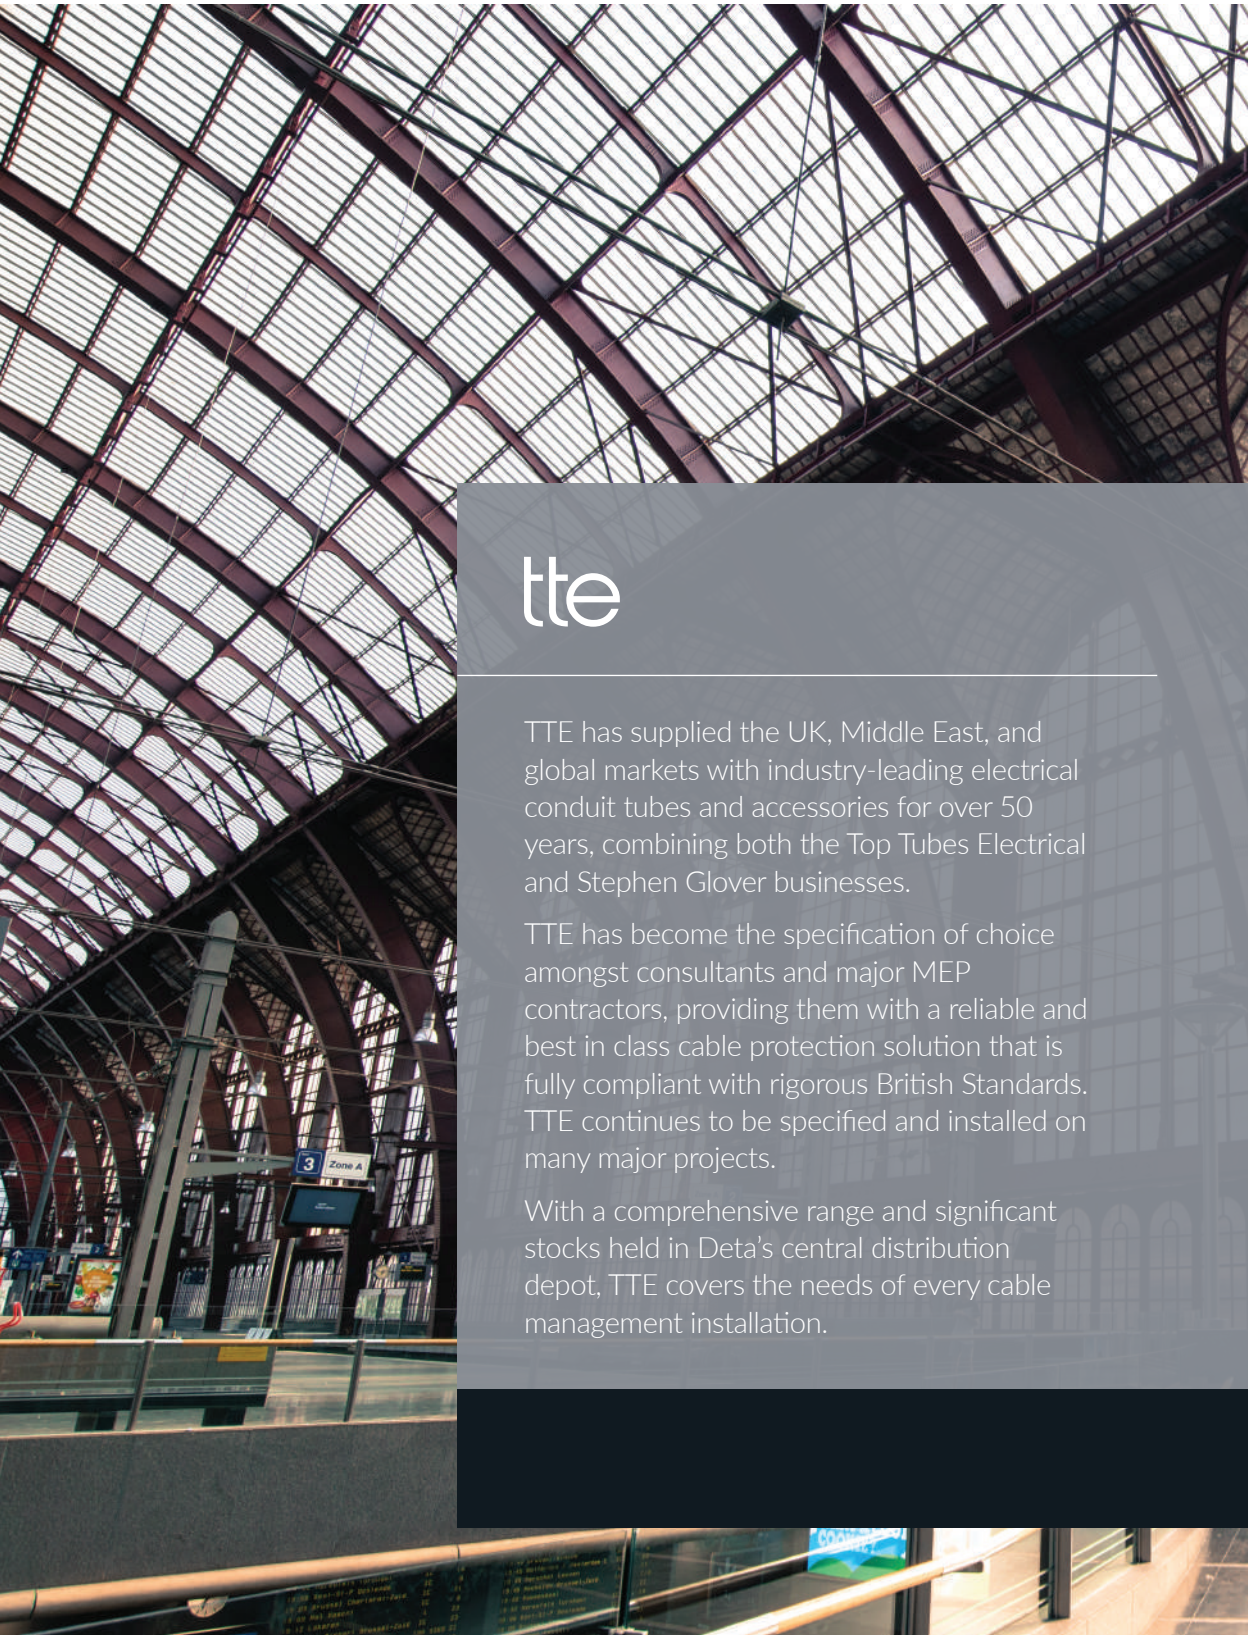


# tte

TTE has supplied the UK, Middle East, and global markets with industry-leading electrical conduit tubes and accessories for over 50 years, combining both the Top Tubes Electrical and Stephen Glover businesses.

TTE has become the specification of choice amongst consultants and major MEP contractors, providing them with a reliable and best in class cable protection solution that is fully compliant with rigorous British Standards. TTE continues to be specified and installed on many major projects.

With a comprehensive range and significant stocks held in Deta's central distribution depot, TTE covers the needs of every cable management installation.

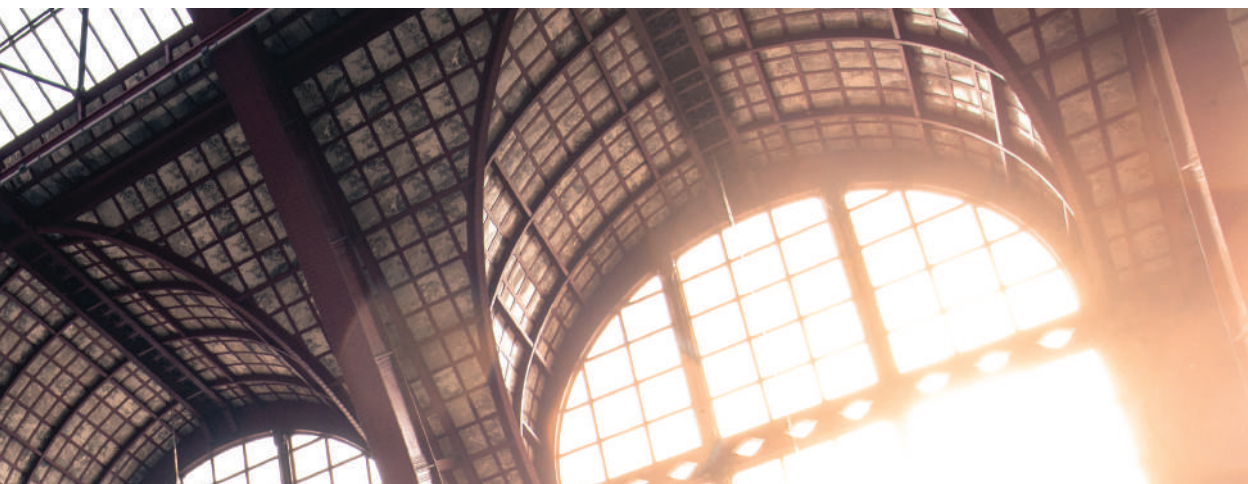

# Class 4 Galvanised Conduit Tube

---


TTE steel conduit is suitable for use in demanding environments. It exceeds the maximum “very heavy” strength classification and can be easily formed on site.

Conduits are hot dipped galvanised inside and out, offering heavy protection and Class 4 compliance. Galvanisation is undertaken in a purpose-built plant to provide an even coating, with a final superheated steam blast employed to and employs a final superheated steam blast to ensure the bore is smooth and defect-free, minimising cable damage during installation.

<b>Material</b>	Manufactured from Grade Q195 Steel
<b>Manufacturing Process</b>	Tubes are roll formed, and electrical resistance welded
<b>Resistance against corrosion</b>	Hot dipped galvanised to BS EN 61386 Class 4 using a specialist superheated steam blast to ensure the bore is smooth and clear of defects that might damage cables during installation
<b>Resistance to compression</b>	Tested to very heavy grade - Classification 5
<b>Resistance to impact</b>	Tested to very heavy grade - Classification 5
<b>Tensile strength</b>	Tested to very heavy grade - Classification 5
<b>Standard BS 4568 - 1</b>	Steel conduit and fittings with metric threads
<b>Standard BS EN 61386 - 21</b>	Conduit systems for cable management - requirements for rigid conduit systems
<b>Storage</b>	Galvanised conduit should be stored in dry conditions to prevent wet storage stain (Should this occur, it can be removed and is unlikely to affect resistance to corrosion)

# BS EN 61386 Class 4 Conduit

- Hot dipped galvanised inside and out to Class 4
- Ink Jet marked
- Threaded at both ends
- Each length supplied with one coupler and one plastic thread protector cap
- Available in 20mm and 25mm diameter and 3.00m and 3.75m lengths
- In compliance with BS EN 61386



DT20300

Catalogue Code	Product Diameter	Length	Lengths per master bundle	Metres per master bundle	Lengths per small bundle
DT20300	20mm	3.00m	400	1200m	8
DT20375		3.75m		1500m	
DT25300	25mm	3.00m	320	960m	
DT25375		3.75m		1200m	

# BS 4568 and BS EN 61386 Class 4 Conduit

- Hot dipped galvanised inside and out to Class 4
- Hard stamped during manufacturing process
- Threaded at both ends
- Each length supplied with one coupler and one plastic thread protector cap
- Available in 20mm, 25mm and 32mm diameter in 3.75m lengths
- In compliance with BS 4568 and BS EN 61386



DTS25375\*

Catalogue Code	Product Diameter	Length	Lengths per master bundle	Metres per master bundle	Lengths per small bundle
DTS20375*	20mm	3.75m	400	1500m	8
DTS25375*	25mm		320	1200m	
DTS32375	32mm		100	375m	4

\*Special order product, minimum order quantity and lead time applies

# Malleable Boxes

- 20/25mm Boxes - Cover fixings M4 at 50.8mm centres
- 32mm Boxes - Cover fixings M4 at 71.5mm centres
- 20mm Boxes - Internal depth 25mm
- 25mm Boxes - Internal depth 28mm
- 32mm Boxes - Internal depth 37mm
- Tapped M4 hole for earth terminal in base
- Manufactured to BS 4568 and BS EN 61386
- Boxes are galvanised after manufacture and meet the most demanding Class 4 corrosion protection standard

## Terminal Box (1 Way)

DT21120G	20mm
DT21125G	25mm
DT21132G	32mm

## Through Box (2 Way)

DT22120G	20mm
DT22125G	25mm
DT22132G	32mm

## Angle Box

DT25120G	20mm
DT25125G	25mm
DT25132G	32mm

## Tee Box (3 Way)

DT23120G	20mm
DT23125G	25mm
DT23132G	32mm

## U Box (Branched 2 Way)

DT26120G	20mm
DT26125G	25mm

## Y Box (Branched 3 Way)

DT26220G	20mm
DT26225G	25mm

## H Box

DT26420G	20mm
DT26425G	25mm

## Intersection Box (4 Way)

DT24120G	20mm
DT24125G	25mm



DT21120G



DT22125G



DT25120G



DT23120G



DT26120G



DT26220G



DT26420G



DT24125G

# Malleable Back Outlet Boxes

## Back Outlet Box

DT21420G 20mm  
DT21425G\* 25mm



DT21420G



DT21325G

## Terminal and Back Outlet Box

DT21320G 20mm  
DT21325G 25mm

## Through and Back Outlet Box

DT22320G 20mm  
DT22325G\* 25mm



DT22320G



DT25325G\*

## Angle and Back Outlet Box

DT25320G 20mm  
DT25325G\* 25mm

## Tee and Back Outlet Box

DT23320G\* 20mm  
DT23325G\* 25mm



DT23325G\*

# Malleable Extension Boxes

## Terminal Extension Box

DT21220G 20mm  
DT21225G 25mm



DT21220G

## Through Extension Box

DT22220G 20mm  
DT22225G 25mm



DT22220G

## Loop-In Boxes

- 20mm Boxes - Cover fixings M4 at 50.8mm centres
- 20mm Boxes - Internal depth 25mm
- Tapped M4 hole for earth terminal in base
- Malleable Boxes are galvanised after manufacture and meet the most demanding Class 4 corrosion protection standard

### Loop-In Box (Malleable)

DT27001	1 Hole
DT27002	2 Hole



DT27001

### Loop-In Box (Pressed Steel)

DT30001	1 Hole
DT30002	2 Hole
DT30005	4 KO



DT30001

## Extension Rings (Pressed Steel)

### Extension Rings (Pressed Steel)

DT31013Z*	13mm
DT31016Z	16mm
DT31020Z	20mm
DT31025Z	25mm
DT31032Z	32mm
DT31038Z*	38mm
DT31050Z	50mm




DT31013Z\*

## Couplers

### Couplers (Steel)

DT31120G	20mm
DT31125G	25mm
DT31132G	32mm
DT31138G	1.5"
DT31150G	2"



DT31120G



DT31220G\*

### Earth Couplers (Malleable)

DT31220G*	20mm
DT31225G*	25mm

### Flanged Couplers (Malleable)

DT31320G	20mm
DT31325G	25mm
DT31332G*	32mm



DT31320G

\*Special order product, minimum order quantity and lead time applies

# Bends, Elbows, Tees and Hooks

- Inspection bends, elbows and tees include galvanised inspection cover

## Solid Bends (Steel)

DT31420Z 20mm  
DT31425Z 25mm  
DT31432Z\* 32mm



DT31425Z



DT31520G

## Inspection Bends (Malleable)

DT31520G 20mm  
DT31525G\* 25mm



DT31620G



DT31720G

## Solid Elbows (Malleable)

DT31620G 20mm  
DT31625G 25mm



DT31820G



DT31925G

## Inspection Elbows (Malleable)

DT31720G 20mm  
DT31725G 25mm

## Solid Tees (Malleable)

DT31820G 20mm  
DT31825G\* 25mm



DT32020G

## Inspection Tees (Malleable)

DT31920G 20mm  
DT31925G 25mm

## Suspension Hooks (Malleable)


DT32020G 20mm hook  
DT32025G\* 25mm hook

# Lids, Gaskets, Dome Covers and Hookplates

- Box lids manufactured from pre-galvanised sheet

## Box Lids (Zinc Plated)

DT32201G 20/25mm 2 Holes  
DT32204G 32mm 4 Holes



DT32201G



DT32301

## Gaskets (Rubber)

DT32301 20/25mm  
DT32302 32mm

## Female Dome Covers (Malleable)

DT32420G 20mm  
DT32425G 25mm



DT32425G



DT32620G

## Hookplates (Pre-Galvanised)

DT32620G 20mm

# Nipples

## Standard Steel Nipples (Zinc Plated)

DT32720Z 20mm  
DT32725Z 25mm  
DT32732Z 32mm



DT32720Z



DT32732Z\*

## 300mm Long Steel Nipples (Zinc Plated)

DT32820Z\* 20mm  
DT32825Z\* 25mm  
DT32832Z\* 32mm


# Adaptors

## Screwed Reducers (Zinc Plated)

DT3302520Z 25 x 20mm  
DT3303220Z 32 x 20mm  
DT3303225Z 32 x 25mm



DT3302520Z



DT33150Z\*

## Hex Plugs (Zinc Plated)

DT33120Z 20mm  
DT33125Z 25mm  
DT33132Z 32mm  
DT33138Z\* 1.5"  
DT33150Z\* 2"

\*Special order product, minimum order quantity and lead time applies

# Brass Accessories

- Brass Earth Terminal suitable for use with malleable boxes
- Short and long pattern male brass bushes available

## Male Brass Bush (Short)

DT40120	20mm
DT40125	25mm
DT40132	32mm
DT40138	1.5"
DT40150	2"



DT40120



DT40220

## Male Brass Bush (Long)

DT40220	20mm
DT40225	25mm
DT40232	32mm
DT40238	1.5"
DT40250	2"



DT40320



DT40420

## Female Brass Bush

DT40320	20mm
DT40325	25mm
DT40332	32mm
DT40338	1.5"
DT40350	2"

## Brass Slotted Plugs

DT40420	20mm
DT40425*	25mm
DT40432*	32mm



DT40520



DT40604

## Brass TRS Glands

DT40520	20mm gland hole $\varnothing$ 7.5mm
DT40525	25mm gland hole $\varnothing$ 11.5mm
DT40532*	32mm gland hole $\varnothing$ 14.5mm

## Brass Earth Terminal

DT40604	M4
---------	----

# Locknuts and Lockrings

- Locknuts available in light gauge and heavy gauge

## Light Steel Locknuts (Zinc Plated)

DT33320Z	20mm
DT33325Z	25mm
DT33332Z	32mm
DT33338Z	1.5"
DT33350Z	2"



DT33320Z



DT33420Z\*

## Heavy Steel Locknuts (Zinc Plated)

DT33420Z*	20mm
DT33425Z*	25mm
DT33432Z*	32mm



DT33538Z

## Milled Edge Lockrings (Zinc Plated)


DT33520Z	20mm
DT33525Z	25mm
DT33532Z	32mm
DT33538Z	1.5"
DT33550Z	2"

# Adaptable Boxes

- Available with knockouts or plain sides
- Knockouts are 20/25mm combination
- Manufactured from pre-galvanised steel

## Adaptable Boxes

Knockout	Plain		
DT501332G	DT502332G*	3" x 3" x 2"	(75x75x50mm)
DT501442G	DT502442G*	4" x 4" x 2"	(100x100x50mm)
DT501443G	DT502443G*	4" x 4" x 3"	(100x100x75mm)
DT501662G	DT502662G*	6" x 6" x 2"	(150x150x50mm)
DT501663G	DT502663G*	6" x 6" x 3"	(150x150x75mm)
DT501664G	DT502664G*	6" x 6" x 4"	(150x150x100mm)
DT501994G	DT502994G*	9" x 9" x 4"	(225x225x100mm)
DT50112124G	DT50212124G*	12" x 12" x 4"	(300x300x100mm)



DT502332G\*

Width of Side	No of KO's per Side
3"	2
4"	2
6"	4
9"	6
12"	8

\*Special order product, minimum order quantity and lead time applies

# Saddles

- Saddles available for use with 20mm, 25mm and 32mm conduit

## Half Saddles (Zinc Plated)

DT33820Z 20mm  
DT33825Z 25mm



DT33820Z



DT33932Z

## Steel Saddles (Zinc Plated)

DT33920Z 20mm  
DT33925Z 25mm  
DT33932Z 32mm



DT34020Z



DT34020BK

## Spacer Bar Saddles (Zinc Plated)

DT34020Z 20mm  
DT34025Z 25mm  
DT34032Z 32mm

## Spacer Bar Saddles (Steel Powder Coated)

DT34020WH 20mm  
DT34020BK 20mm  
DT34025WH 25mm  
DT34025BK 25mm



DT34120G



DT34220G

## Heavy Distance Saddles (Malleable)

DT34120G 20mm  
DT34125G 25mm  
DT34132G 32mm

## Hospital Saddles (Malleable)

DT34220G 20mm  
DT34225G 25mm

# Crampets and Jack Chain

## Steel Crampets (Zinc Plated)

DT33620Z 20mm  
DT33625Z 25mm



DT33620Z

## Jack Chain (Pre-Galvanised)

DT33210G\* No 10



DT33210G\*

## Stock, Die and Guide Set

---

- Supplied with 20mm and 25mm dies

### Stock, Die and Guide Set

**DT6012025** Stock, die and guide set 20/25mm



DT6012025

## Conduit Bender

---

- Supplied with 20mm and 25mm formers
- Includes extender arm for additional leverage
- Includes vice grip

### Conduit Bender

**DT615** Metal conduit bender 20/25mm



DT615



# Technical

---



# Back Box Cross Reference Table

## FLUSH MOUNTING

- Vimark, Vimark Curve

Depth	METAL BOXES				DRY LINING BOXES	
	16mm	25mm	35mm	47mm	35mm	46mm
<b>SOCKETS</b>						
1 gang 13A		DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
2 gang 13A		DB163	DB165	DB168	DB2541	DB2543
Round pin sockets		DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
Shaver sockets				DB168		DB2543
USB charging sockets (2 port)*			DB165*	DB168	DB2541	DB2543
USB charging sockets (3 port)*		DB163*	DB165	DB168	DB2541	DB2543
<b>PLATE SWITCHES</b>						
1, 2 and 3 gang	DB152	DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
4 and 6 gang		DB163	DB165	DB168	DB2541	DB2543
Intermediate		DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
3 pole fan isolator	DB152	DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
<b>DIMMER SWITCHES</b>						
1 and 2 gang		DB162	DB164 / DB166	DB167	DB2540 / DB254	DB2542
3 and 4 gang		DB163	DB165	DB168	DB2540 / B2545	DB2543
<b>CONNECTION UNITS</b>						
Fused/unfused		DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
<b>HIGH CURRENT SWITCHES</b>						
1 gang 20A		DB162	DB164	DB167	DB2540	DB2542
1 gang 50A				DB167		DB2542
1 gang tall 50A				DB168		DB2543
Cooker control unit				DB168		DB2543
45A outlet				DB167		DB2542
<b>MULTIMEDIA OUTLETS</b>						
Telephone outlets		DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
TV outlets			DB164 / DB166	DB167	DB2540 / DB2545	DB2542
<b>FLEX CONNECTION/BLANK PLATES</b>						
Flex connection plate			DB164 / DB166	DB167	DB2540 / DB2545	DB2542
1 gang blank plate	DB152	DB162	DB164 / DB166	DB167	DB2540 / DB2545	DB2542
2 gang blank plate		DB163	DB165	DB168	DB2541	DB2543
<b>CEILING SWITCHES</b>						
10A			DB2544 (34mm)			
50A				DB167	DB2540 / DB2545	DB2542

\* Limited cable entry positions at bottom of the box

# Back Box Cross Reference Table

## SURFACE MOUNTING

- Vimark

Depth	PATTRESS BOXES			
	16mm	25mm	33mm	45mm
SOCKETS				
1 gang 13A		V1221/V1225	V1222/V1226	V1228
2 gang 13A		V1223	V1224	V1229
Round pin sockets		V1221/V1225	V1222/V1226	V1228
Shaver sockets				V1229
USB charging sockets (3 port)*		V1223	V1224	V1229
PLATE SWITCHES				
1, 2 and 3 gang	V1220E	V1221/V1225	V1222/V1226	V1228
4 and 6 gang		V1223	V1224	V1229
Intermediate	V1220E	V1221/V1225	V1222/V1226	V1228
3 pole fan isolator	V1220E	V1221/V1225	V1222/V1226	V1228
ARCHITRAVE SWITCHES				
1 gang	V1324			
2 gang	V1325*			
DIMMER SWITCHES				
1 and 2 gang		V1221/V1225	V1222/V1226	V1228
3 and 4 gang		V1223	V1224	V1229
CONNECTION UNITS				
Fused/Unfused		V1221/V1225	V1222/V1226	V1228
HIGH CURRENT SWITCHES				
1 gang 20A		V1221/V1225	V1222/V1226	V1228
1 gang 50A				V1228
1 gang tall 50A				V1229
Cooker control unit				V1229
45A outlet				V1228
MULTIMEDIA OUTLETS				
Telephone outlets		V1221/V1225	V1222/V1226	V1228
TV outlets			V1222/V1226	V1228
FLEX CONNECTION/BLANK PLATES				
Flex connection plate			V1222/V1226	V1228
1 gang blank plate	V1220E	V1221/V1225	V1222/V1226	V1228
2 gang blank plate		V1223	V1224	V1229
CEILING SWITCHES				
10A				
50A				V1228

\* Limited cable entry positions at bottom of the box

# Back Box Cross Reference Table

## SURFACE MOUNTING

- Vimark Curve

	PATTRESS BOXES				
	Depth	16mm	25mm	33mm	45mm
<b>SOCKETS</b>					
1 gang 13A			VC1221	VC1222	VC1228
2 gang 13A			VC1223	VC1224	VC1229
Round pin sockets			VC1221	VC1222	VC1228
Shaver sockets					VC1229
USB charging sockets (3 port)*			VC1223	VC1224	VC1229
<b>PLATE SWITCHES</b>					
1, 2 and 3 gang	VC1220E	VC1221	VC1222	VC1228	
4 and 6 gang		VC1223	VC1224	VC1229	
Intermediate	VC1220E	VC1221	VC1222	VC1228	
3 pole fan isolator	VC1220E	VC1221	VC1222	VC1228	
<b>DIMMER SWITCHES</b>					
1 and 2 gang		VC1221	VC1222	VC1228	
<b>CONNECTION UNITS</b>					
Fused/Unfused		VC1221	VC1222	VC1228	
<b>HIGH CURRENT SWITCHES</b>					
1 gang 20A		VC1221	VC1222	VC1228	
1 gang 50A				VC1228	
1 gang tall 50A				VC1229	
Cooker control unit				VC1229	
45A outlet				VC1228	
<b>MULTIMEDIA OUTLETS</b>					
Telephone outlets		VC1221	VC1222	VC1228	
TV outlets			VC1222	VC1228	
<b>FLEX CONNECTION/BLANK PLATES</b>					
Flex connection plate			VC1222	VC1228	
1 gang blank plate	VC1220E	VC1221	VC1222	VC1228	
2 gang blank plate		VC1223	VC1224	VC1229	

\* Limited cable entry positions at bottom of the box

# Terminal Capacity

Product	No. And Size Of Conductors Accommodated					
	1.0mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4.0mm <sup>2</sup>	6.0mm <sup>2</sup>	10mm <sup>2</sup>
13A sockets			4	2	2	1
Connection units			4	2	1	1
2A round pin sockets	3	2	1			
5A round pin sockets		3	2			
15A round pin sockets		4	3	1		
Plate switches	4	3				
20A switch			4	2	1	1
Shaver socket outlet	3	2	1			
50A switch			5	3	2	1

# Mounting Box Knockouts

## Metal Boxes

Knockouts	DB164	DB165	DB171	DB172	DB173	DB174
20mm	6	8	4	5	7	8
25mm	2	4	4	5	7	8
Dimensions (mm)	72x72x35	132x72x35	132x132x42	132x192x42	192x192x60	192x250x60

## Lampholder 'T' Rating

---

Bayonet (B22) lampholders without a T marking or marked T1 are suitable for temperatures on the cap up to and including 165°C. Bayonet (B22) lampholders with a T2 marking are suitable for temperatures on the cap up to and including 210°C.

Alternatively T ratings may state the operating temperature, e.g. T190 would equate to 190°C.

Lamp cap temperatures will depend on the lampholder orientation, lampshade or enclosure used and lamp rating.

Refer to the IET Wiring Regulation (BS7671) for the use of T2 rated lampholders.

## Engraving

---

An engraving service is available for a limited range of wiring accessories. Products can be engraved in an upper and lower case standard font, with either red or black fill.

Engraved products must be ordered in multiples of 10, and are available with a 14 day lead time for stock items, with delivery subject to normal terms.

To order engraved products, please contact the sales office.

## Universal Dimmers

Universal dimmer switches are suitable for controlling LED and incandescent bulbs. They automatically change the dimming mode to either Leading Edge (LE) or Trailing Edge (TE) to suit the type of load connected.


Multiway dimming can be achieved the Universal Dimmer by connecting up to 20 switches to allow dimming from all positions.

Universal Dimmers can operate loads from 3W up to 250W of dimmable LED lamps, and up to 350W for incandescent loads. Whilst the dimming mode changes automatically to suit the load, it can be manually reprogrammed from Leading Edge (LE) to Trailing Edge (TE) mode if compatibility issues are found when dimming LED lamps. In addition to this, the minimum dimming level can be set – see the instruction leaflet.

The maximum and minimum load, as well as the maximum number of lamps the dimmer can control will vary according to the make and type of LED lamp. Compatibility between the load and dimmer should be checked before installation.

Dimmer switches are available in the Vimark and Vimark Curve ranges, in both 1g and 2g, and as a Gridswitch Module.

Universal Dimmer Wiring Diagram

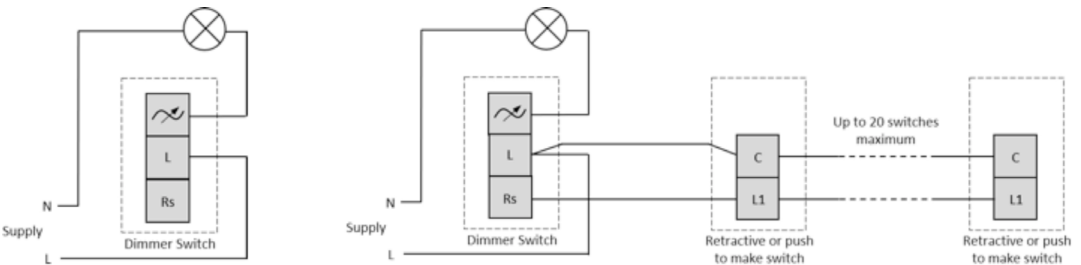

## Universal Gridswitch Dimmers

Dimmer switch modules in the Gridswitch range need to be de-rated when installed in multiple gang frontplates. Also, the dimmer switches must be installed in the lower rows of the frontplate. It is recommended that back boxes for dimmer switches are at least 40mm deep.

Dimmers in the bottom row should be de-rated to 75% of their maximum load. Dimmers in the second from bottom row should be de-rated to 50% of their maximum load, and dimmers in the third from bottom row should be de-rated to 50%. It is not advisable to install dimmers in the top row.

- TV Outlets or modules must not be installed in the same enclosure as mains voltage systems

There are different AV distribution systems available, each of which have different cabling and termination requirements. A terrestrial system may have an aerial feeding a single coax TV connection point. A slightly complex system may include a combination of aerial, satellite, broadband and radio inputs which are fed to their corresponding AV equipment such as a TV, a satellite receiver box or a radio set. Where multiple AV outlets are required multi-switches, splitters and amplifiers are used to distribute signal.

Isolated sockets are intended for use where safety isolation (rated at 2kV) is required to provide protection against faults within any mains powered product used on different parts of the distribution system. Therefore, isolated sockets are to be installed where multiple coaxial socket outlets are required.

**Diplexer** outlets are intended for use where both TV and FM/DAB signals are combined on a single download. The filter within the diplexer separates the appropriate signal and feeds them to the relevant output connection.


**Triplexer** outlets are intended for use where TV, FM/DAB and satellite signals are combined on a single download. The filter within the triplexer separates the appropriate signal and feeds them to the relevant output connection. The triplexer provides a DC control path in the SAT signal path.

**Quadplexer** outlets contain TV, FM/DAB and two satellite outlets and are intended for use with Sky+, or more complex installations.


**Sky Q** – for installation in single dwellings, use two F-Type modules. For communal areas, the installation can be completed using a combination of a dSCR multi-switch and triplexer/quadplexer module.

A range of data plates and modules are also available, which allow the use of additional modules such as coaxial return sockets and telephone outlets for interactive TV applications.


### Typical Installations



Basic domestic installation where a non-isolated coaxial outlet is connected directly to the aerial.




Communal aerial system, i.e. flats, hotels etc. where isolated coaxial outlets are wired separately to an amplifier.




Domestic installation with satellite, including return feed for distribution to outlets in other rooms.

## Final Ring Circuits

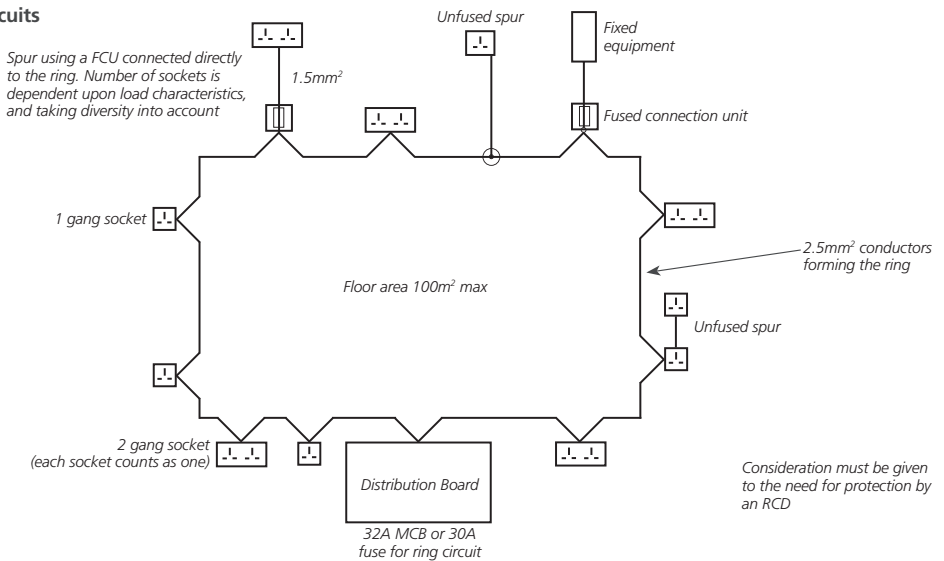

## Final Radial Circuits

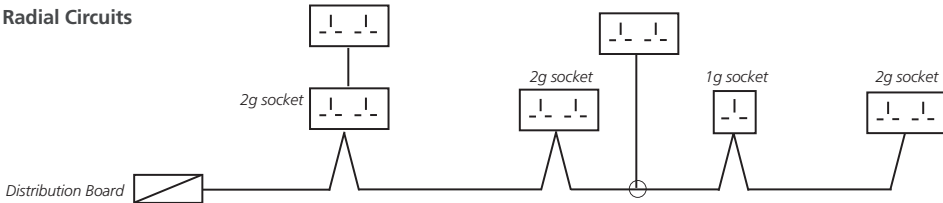

## Final Circuits Using BS 1363 Socket-Outlets

Type of circuit	Overcurrent protective device		Minimum conductor size*		Maximum floor area served m <sup>2</sup>
	Rating Amps	Type	Copper conductor Thermo-setting or PVC insulation mm <sup>2</sup>	Copper conductor mineral insulated cables mm <sup>2</sup>	
A1 Ring	30 or 32	Any	2.5	1.5	100
2 Radial	30 or 32	Cartridge fuse or circuit breaker	4	2.5	75
A3 Radial	20	Any	2.5	1.5	50

\*The tabulated values of conductor size may be reduced for fused spurs

Refer to the IET Wiring Regulations (BS 7671) for a complete description of conventional circuit arrangements.

The IP (international protection) rating given to an enclosure states the degree of protection it offers by means of two digits.

A summary of these is shown below; for a more detailed definition, see IEC 529: 1989, BS EN 60529: 1992.

### First Digit

#### Protection against solid foreign objects and access to hazardous parts

The first digit covers protection against penetration by solid objects, which includes hands and tools such as screwdrivers. At the lowest of seven levels, 0, no protection is offered, either of the equipment itself from damage by intrusion or of a person contacting live or moving parts. At the highest, 6, there shall be no entry of dust.

### Second Digit

#### Protection against ingress of water

The second digit covers the degree of protection against the entry of water, on a progressive scale. For example, number 1 indicates that dripping water shall have no harmful effect. Alternatively, number 6 indicates water projected in powerful jets against the enclosure from any direction shall have no harmful effects.

IP	
0	No protection
1	Protected against solid objects up to 50mm e.g. accidental touch by hands
2	Protected against solid objects up to 12mm, e.g. fingers
3	Protected against solid objects over 2.5mm, e.g. tools and wires
4	Protected against solid objects over 1mm, e.g. tools, wires and small wires
5	Protected against dust - limited ingress, no harmful deposits
6	Totally protected against dust

IP	
0	No protection
1	Protected against vertical falling drops of water, e.g. condensation
2	Protected against direct sprays of water up to 15° from the vertical
3	Protected against sprays of water up to 60° from the vertical
4	Protected against water splashed from all directions - limited ingress permitted
5	Protected against low pressure jets of water from all directions - limited ingress permitted
6	Protected against strong jets of water, e.g. for use on ship decks - limited ingress permitted

The letter X can be used in place of the first or second digit to indicate that tests have either not been made or are not applicable.

**NOTE** In the event of additional holes being drilled/pierced or knockouts removed, suitable measures should be taken to restore the products to the original ratings.

IEC 529, BS EN 60529 does not apply to protection against the risk of explosion or conditions such as humidity, corrosive gases, fungi or vermin. In certain cases equipment designed to be mounted in an enclosure will contribute towards the stated IP rating (e.g. pushbuttons mounted in an enclosure). Different parts of enclosures can have different degrees of protection and still conform to the standard (e.g. enclosures with pre-drilled conduit entry).

---

## deta<sup>^</sup>

With over 65 years of electrical industry experience, Deta has grown to become a trusted market leading manufacturer and distributor of wiring, lighting, cable management and electrical installation accessories, with a reputation for unrivalled quality, reliability, service and value for money. As the number one electrical brand of choice amongst new build housing developers, Deta's products are widely specified and installed across the private and social housing sectors, as well as high rise developments, student accommodation and care homes.

---

## tte

TTE is a market leading brand of electrical conduit tube and fittings, combining the former Top Tubes Electrical and Stephen Glover businesses. With more than 50 years' experience, TTE has been specified and installed on many high-profile projects, including the London 2012 Olympic site, Wembley Stadium, Westfield Shopping Centre, Dubai International Airport and The Louvre Museum Abu Dhabi. TTE offers a reliable and best in class cable management solution that is fully compliant with British Standards.

---

## BRITICENT SITE ELECTRICS

Since its inception in 1908, Briticent Site Electrics has enjoyed more than 100 years of successful trading with a long-standing customer base. Briticent built its reputation on the Gripper<sup>®</sup> range of handlamps, and over the years has developed a core range of essential site lighting and power distribution products. Briticent continues to lead the way with new and innovative energy saving products, becoming the site lighting brand of choice amongst electrical installers throughout the UK and Ireland.

---

## deta.e<sup>e</sup>

Deta.e offers products that seamlessly combine Deta Electrical's core value of environmental preservation with its long established and trusted reputation for delivering high quality electrical products at competitive prices. Offering a range of smart, safe, and secure EV charge points, Deta.e embraces cutting edge technologies that offer sustainable solutions to assist homeowners and businesses in making an easy transition to a new energy efficient future. (deta-e.co.uk)

---

## Vimark

Steeped in over 25 years of history, Deta Electrical's long established Vimark brand holds a reputation for the supply of high quality, value for money electrical and wiring accessories. Offering a wide portfolio of products, including wiring accessories, motion sensors, ventilation, hand dryers, back boxes and electrosparcs, Vimark is a long established and trusted brand that supports electrical contractors with their everyday installation requirements.

---

## Brackenhath

Established in 1978, Brackenhath is renowned for supplying high quality and competitively priced domestic and commercial lighting products. Through continuous investment in LED and sensing technologies, Brackenhath pioneered the design of its market leading iSpot<sup>®</sup> range of slim profile, driverless LED Floodlights and continues to lead the way in bringing to market new and innovative LED lighting solutions.

---

## CHANNEL Smarter Safety<sup>®</sup>

Established in 1976, Channel is a leading manufacturer of emergency LED lighting and safety systems and a key distributor of the UK's leading brands for fire detection solutions. Renowned for the breadth and depth of each product range, Channel has gained a loyal customer base driven by an excellence in technical and customer support. Proud to be affiliated with ICEL, LIA and EDA, Channel are registered with BSI and are members of the Apollo Partner Plus programme.

---

## TIMEGUARD<sup>®</sup>

A trusted UK industry leader synonymous with quality and innovation, Timeguard has more than 25 years' experience in the manufacture and sale of time, light, safety, wi-fi and climate control electrical products. Continuously delivering energy savings that owners and occupiers are looking for, alongside the creation of new designs that offer easy installation, Timeguard has become a favourite among homeowners and installers. (timeguard.com)

Think electrical, think... deta<sup>^</sup>



deta<sup>^</sup>

**Deta Electrical Company Limited**

Panattoni Park, Luton Road, Chalton,  
Bedfordshire, LU4 9TT

t: 01582 544 500

e: [sales.ce@deta.co.uk](mailto:sales.ce@deta.co.uk)

w: [deta.co.uk](http://deta.co.uk)

