

## Girona Panel Heater (White)



### Technical Details

<b>Controls</b>	Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ) <b>Timer modes:</b> 7 Day Programmable User Timer, Out All Day, Home All Day, Holiday <b>Continuous heat modes:</b> Eco, Manual, Frost Protect, Setback, Runback, Off
<b>Controller UI</b>	<ul style="list-style-type: none"> <li>Graphical display with RGB backlight</li> <li>Capacitive buttons with audio feedback</li> <li>User replaceable battery (Coin-Type)</li> </ul>
<b>Controller Functions</b>	<ul style="list-style-type: none"> <li>Open window detection, Adaptive-start, Advance time period</li> <li>Adjustable max SP range (<math>7-32^{\circ}\text{C}</math>)</li> <li>Bluetooth for software updates</li> <li>Child Lock &amp; Landlord Lock (PIN-based)</li> </ul>
<b>Construction</b>	Durable epoxy-polyester powder coated steel casing with louvered upward facing grille Advanced controls with cap-sense technology for total flexibility of heating
<b>Element</b>	Compact, finned, mineral filled sheathed element
<b>Installation</b>	1 H-frame wall bracket for easy fixing
<b>Safety</b>	<ul style="list-style-type: none"> <li>Thermal cut-out. Auto reset type</li> <li>Overheat detection</li> </ul>
<b>IP Rating</b>	IP24
<b>Battery Backup</b>	3.3V coin cell battery to backup real time clock. Battery life > 5 years.
<b>Supply</b>	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire
<b>Colour / Finish</b>	Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)

### Warranty & Approvals

<b>Approvals</b>	CE, BEAB
<b>Warranty</b>	2 Years
<b>Country of Origin</b>	United Kingdom
<b>Manufacturer</b>	Glen Dimplex Heating & Ventilation (GDC Group Ltd)


## Product Description

GFPWE features intuitive user controls, allowing the programming of multiple 7-day timer profiles via a backlit LCD display and capacitive buttons

### Key Features

- Elegant designer panel with upwards facing grille for optimum heat circulation
- Intuitive user controls with RGB backlit LCD display
- User programmable room temperatures with multiple seven-day timer profiles
- Electronic thermostat accurate to within  $0.2^{\circ}\text{C}$
- Energy-saving technologies such as Adaptive Start and Open Window Detection
- Aesthetics to compliment storage heater ranges
- Splash proof for use in bathrooms
- Complies with Lot 20 of ERP Directive

### Dimensions

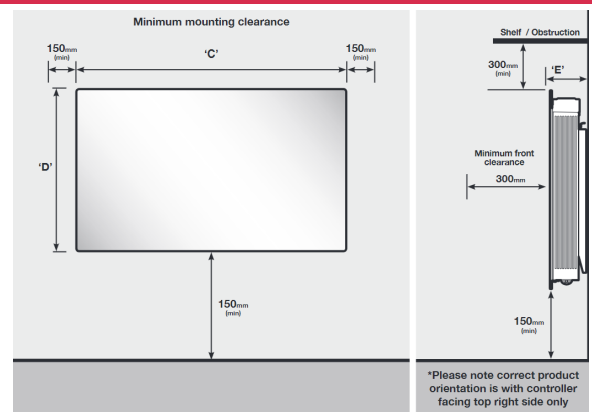

Model/Item No. (EAN-Code 5011139+Item No.)	090850	GFP050WE	090867	GFP075WE	090874	GFP100WE	090881	GFP150WE	090898	GFP200WE
Output (kW)	0.50		0.75		1.00		1.50		2.00	
Height 'D' (mm)	565		565		565		565		565	
Width 'C' (mm)	530		530		700		770		940	
Depth 'E' (mm)	107		107		107		107		107	
Weight (Kg)	13.4		13.4		16.9		18.6		22.1	
Packaging Details										
Height (mm)	670		670		670		670		670	
Width (mm)	590		590		764		837		1000	
Depth (mm)	182		182		182		182		182	
Packed Weight (Kg)	13.2		13.2		16.7		18.4		21.9	
Ti	10		10		7		7		6	
Hi	3		3		2		2		2	
Pallet Quantity (2.4m high)	30		30		14		14		12	