

Plumbing Systems and Water Pressure

All products are suitable for all UK Water Authority supply pressures. If this tap pipes is installed at low pressure (tank fed) then the minimum height from the outlet to the underside of the cold tank should be 1.8 metres to ensure adequate performance.

This tap pipes should be installed in accordance with the current Water Regulations. Any claims that may arise will be dealt with on the basis that isolating valves are fitted.

Water Pressure:

We recommend a minimum water pressure of 0.5 Bar and a maximum of 5 Bar to ensure efficient operation of your product.


Cleaning/General Care

Chrome and Gold plated finishes should be cleaned with warm water and a soft cloth, rinsed and then immediately buffed with a dry soft cloth. Under no circumstances must any aggressive or abrasive cleaning agents be used. The use of any abrasive agents or materials will invalidate the guarantee.

Customer Care Helpline

Telephone: 01386 800750

Email: customerservices@plumbworld.co.uk

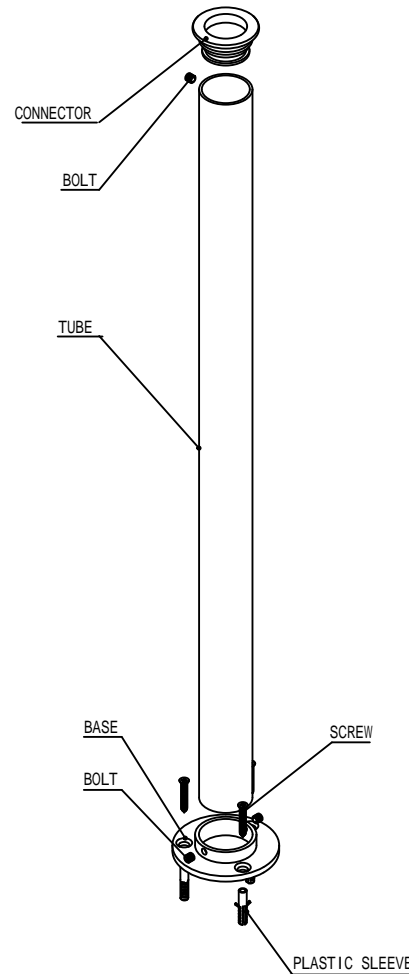

Check out our full range of Bathroom Taps

Contemporary Bathroom Taps

Traditional Bathroom Taps

Waterfall Bathroom Taps

Basin Taps

Bath Taps

Bidet Taps

Luxury Mira Aspects Taps

Mira Honesty

Mira Evolve

Mira Precision

Mira Comfort

Mira Revive

Mira Fluency

Don't forget these amazing tap cleaning and care products

Cramer Tap Cleaner

Cramer Chrom Star Chrome Polish

plumbworld
Big brands, small prices.