

[Specification](#)
[Fiche](#)
[EU Label](#)
[UK Label](#)

Product Specification



Product Code: TCEMVD-0200LFC

Item Description: 200L Cyclone Dir Smart Standard C

C

- Manufactured from high grade Duplex stainless steel
- Heated electrically with two factory fitted immersions
- Fitted with Branded Quality Components


Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
200 L	CYCLONE	DirectUnvented	Stainless	CYCLONE	DIRECT

Product Specification

Actual capacity (Ltr)	200	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	36	Cylinder material	LDX 2101
Unit weight full (kg)	236	Outer casing	COATED MILD STEEL
No immersions	2	Foam thickness (mm)	0
Immersion spec kw 230v	3KW@230V	Dual stat label (C)	65
Max mains water pressure (Bar)	10	Safety temp (C)	90
Operating pressure t x0026 p (Bar)	7	Warranty terms (Year)	25Y
Tested to standard	BS EN 12897:2016	Heat loss (kWh_24h)	1.94

Dimensions

A (mm)	1490
B (mm)	530
C (mm)	196
D (mm)	211
E (mm)	711
F (mm)	981
G (mm)	1211

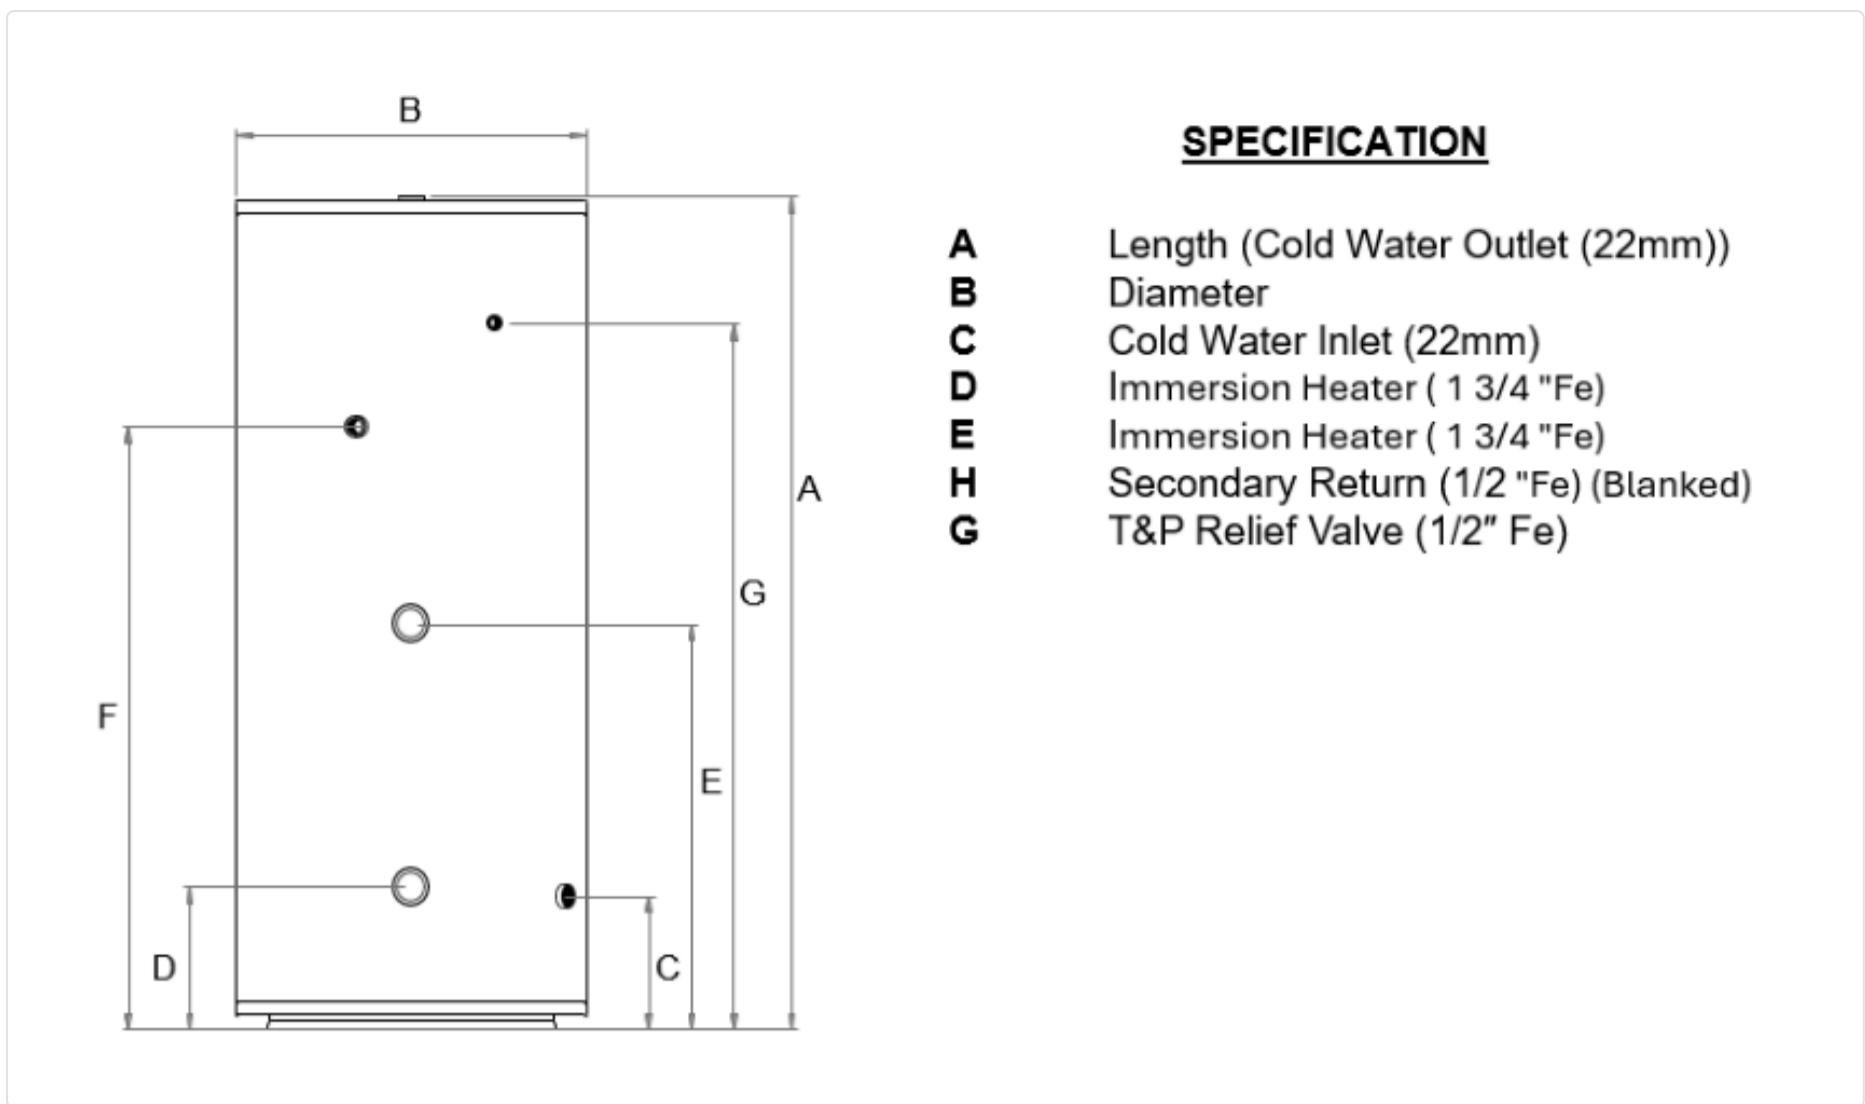

Click or scan here to view the product page:



<https://jouleuk.co.uk/products/cyclone-direct/>



Test Standard: BS EN 12897:2016

Joule UK
 Unit 3, Leftfield Park, Park Road,
 Pontefract, West Yorkshire,
 WF8 4PS, UK

Joule Ireland
 Unit 407 NW Business Park,
 Cappagh Road, Ballycoolin,
 Blanchardstown,
 Dublin