

[Specification](#)
[Fiche](#)
[EU Label](#)
[UK Label](#)

Product Specification



Product Code: TCEMVD-0300NFC

Item Description: 300L Cyclone Dir Smart SHORT (600) C

C

- Manufactured from high grade Duplex stainless steel
- Heated electrically with two factory fitted immersions
- Fitted with Branded Quality Components


Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
300 L	CYCLONE	DirectUnvented	Stainless	CYCLONE	DIRECT

Product Specification

Actual capacity (Ltr)	294	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	53	Cylinder material	LDX 2101
Unit weight full (kg)	353	Outer casing	COATED MILD STEEL
No immersions	2	Foam thickness (mm)	0
Immersion spec kw 230v	3KW@230V	Max mains water pressure (Bar)	10
Safety temp (C)	90	Operating pressure t x0026 p (Bar)	7
Warranty terms (Year)	25Y	Tested to standard	BS EN 12897:2016
Heat loss (kWh_24h)	2.21		

Dimensions

A (mm)	1600
B (mm)	600
C (mm)	218
D (mm)	233
E (mm)	734
F (mm)	1153
G (mm)	1333

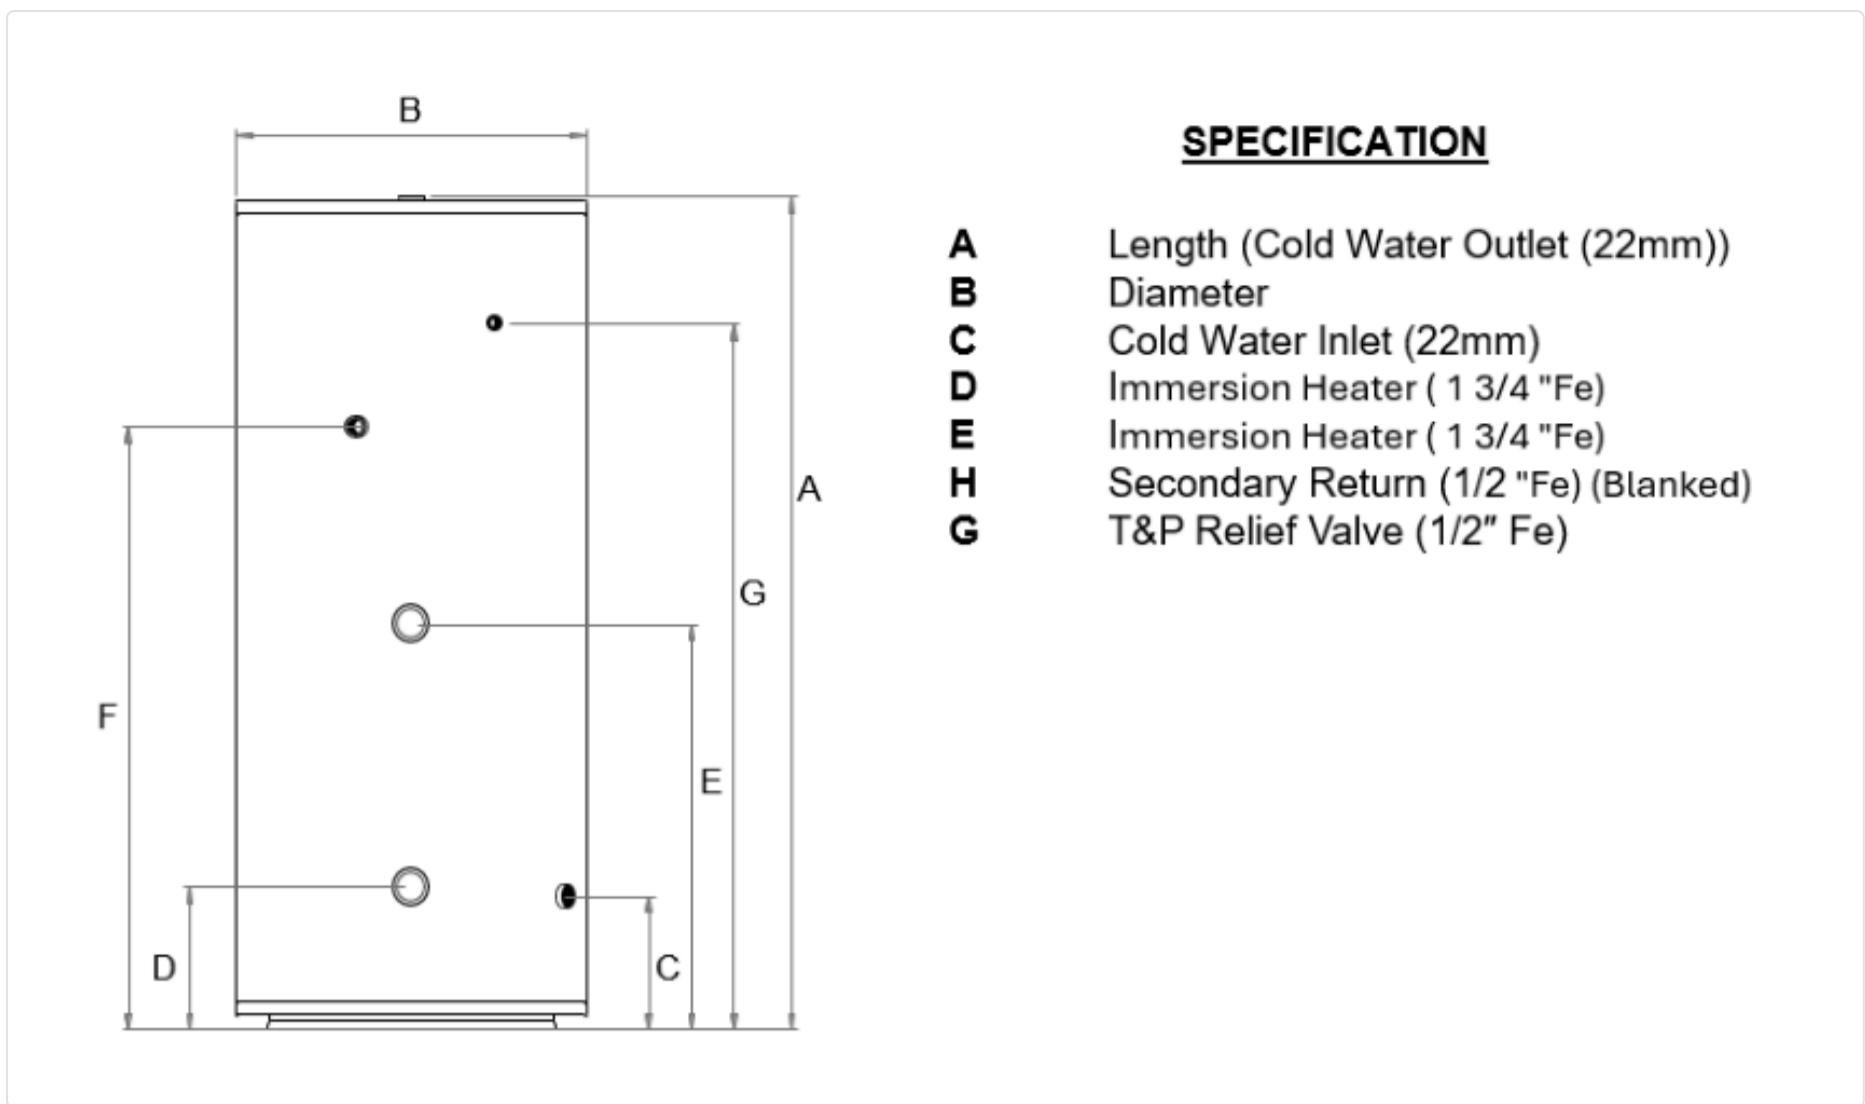

Click or scan here to view the product page:



<https://jouleuk.co.uk/products/cyclone-direct/>



Test Standard: BS EN 12897:2016

Joule UK
 Unit 3, Leftfield Park, Park Road,
 Pontefract, West Yorkshire,
 WF8 4PS, UK

Joule Ireland
 Unit 407 NW Business Park,
 Cappagh Road, Ballycoolin,
 Blanchardstown,
 Dublin