

# Mira Mode High Pressure & Pumped

## Single Outlet Digital Mixer

Smart, simple showering.



SUITABLE FOR ALL SYSTEMS



5 YEAR WARRANTY

### Product Information

| Description                                 | Colour | Product No. |
|---------------------------------------------|--------|-------------|
| Mira Mode Rear Fed (High Pressure/Combi)    | Chrome | 1.1980.001  |
| Mira Mode Rear Fed (Pumped for Gravity)     | Chrome | 1.1980.002  |
| Mira Mode Ceiling Fed (High Pressure/Combi) | Chrome | 1.1980.003  |
| Mira Mode Ceiling Fed (Pumped for Gravity)  | Chrome | 1.1980.004  |

### Features & Benefits

#### Temperature control

Thermostatic temperature stability with digital intelligence

Maximum temperature setting for increased safety

#### Easy to fit and maintain

Easy to install, single piece ceiling fed fittings assembly

Rear fed fittings option suitable for wall mounted installations

Push fit isolators

Long life filters

#### For your customer

Award winning Mira Switch 4 spray showerhead

Connected Mira app offers secondary control and remote operation

User adjustable temperature and flow pre-sets using the Mira app

Additional wireless remote control sold separately



To download other resources, and for more information and advice on our products just visit:  
[www.mirashowers.co.uk](http://www.mirashowers.co.uk)

**mira**  
SHOWERS

# Product Specification

## Tech Details

### Installation Units & Fittings

Water entry points - Back, Rear Fed; Top, Ceiling Fed

Inlet connections: 15mm push fit (supplied) or 15 mm compression

Data connection between digital valve and controller: Low voltage data cable

### Digital Mixer

Inlet connections: 15mm push fit (supplied) or 15 mm compression

Outlet connection: 15mm push fit (supplied)

Data connection between digital valve and controller: Low voltage data cable

Supply voltage: 230v +10%

Supply rating: 3 amp fused plug

### Supply Conditions (hot and cold)

Minimum maintained pressure: Pumped: 0.01 bar (10 cm head);  
High Pressure: 0.5 bar (5 metre head)

Maximum maintained pressure: Pumped: 1.0 bar (10 metre head);  
High Pressure: 5.0 bar (50 metre head)

Maximum static pressure: Pumped: 1.0 bar (10 metre head);  
High Pressure: 10.0 bar (100 metre head)

### Performance

Flow rate:

Default flow rate setting: 12 L/min (adjustable using the Mira app)

Minimum adjustable flow rate: 4 L/min (HP Product) or 6 L/min (Pumped Product)

The Digital Valve can deliver a maximum flow of 16 L/min at 1 bar (HP Product) or 12 L/min at 0.1 bar (Pumped Product).

The actual maximum flow will depend on the installation, system conditions and type of fittings. Refer to the 'Installation and User Guide' for more details.

### Safety Features

Factory set to safe max temp: Factory set at 45°C

### Approvals

WRAS approved (Water Regulations Advisory Scheme)


TMV2 approved

BEAB approved







## Dimensions

### High Pressure, Single Outlet

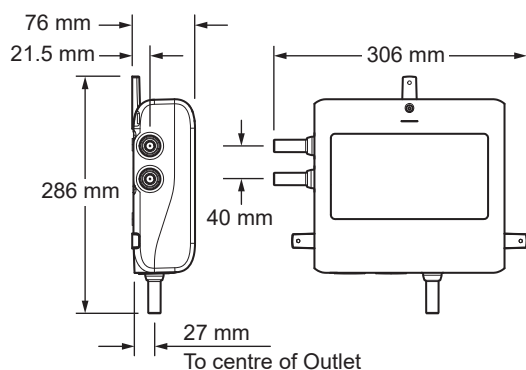

### Pumped, Single Outlet

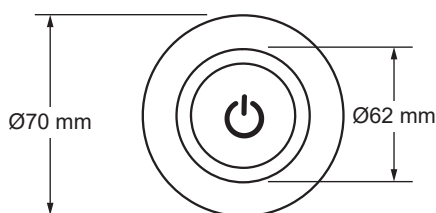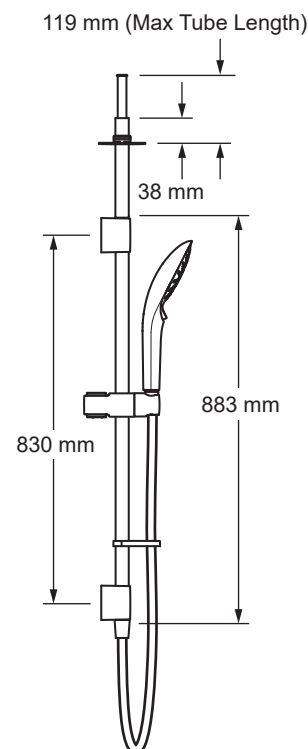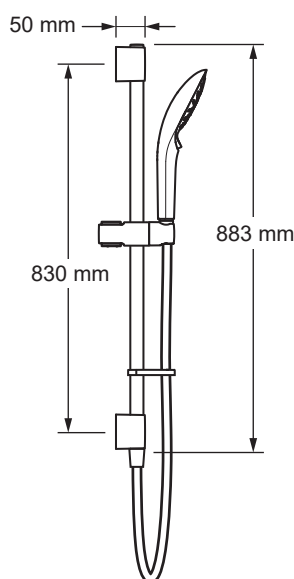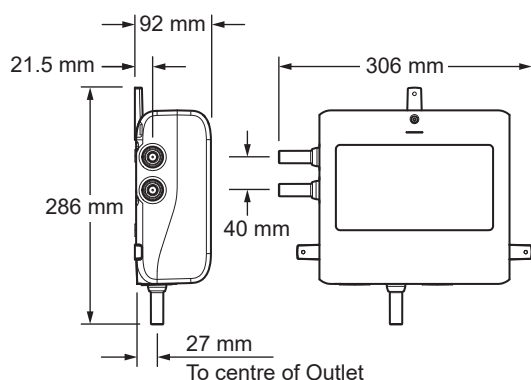

Shower Interface