

Gummers 15mm Thermostatic Mixing Valve with Isolation


Product Code
MT503CP-ISO

Finish/Model Type
Chrome

Weblink

<http://www.specifybristan.com/MT503CPISO>

- Isolation at mixing point facilitates easy servicing
- Automatic shutoff in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard
- Operates at a maximum pressure differential of 10:1
- High pressure bath fill Part G compliant

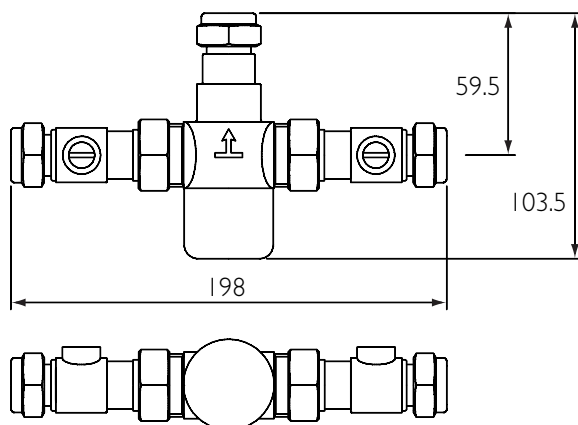

Recommended items: visit www.specifybristan.com

Timed flow controls

Non-thermostatic showers

Pulse 8 automatic controls

Non-thermostatic taps

All measurements in mm (unless stated otherwise)

Inlet connection 15mm

Outlet connection 15mm

Performance with open outlet

Pressure Drop	0.1	0.2	0.5	1	2	3	4	5
Flow Rate	5	8.5	15	21.5	31	-	-	-

Call our specifier helpline on **0844 701 6273**

or visit www.specifybristan.com

Bristan, Birch Coppice Business Park,
Dordon, Tamworth, Staffordshire B78 1SG



Healthcare

Education

Sports & Leisure

Product Code

MT503CP-ISO

TMV2 Designations of use

- HP-S High pressure shower
- LP-S Low pressure shower
- HP-W High pressure washbasin
- LP-W Low pressure washbasin
- HP-B High pressure bidet
- HP-T High pressure bath

TMV3 Designations of use

- HP-S High pressure shower
- LP-S Low pressure shower
- HP-W High pressure washbasin
- LP-W Low pressure washbasin
- HP-T44 High pressure bath fill with maximum temperature 44°C

Pressures

- Minimum pressure drop: 0.1 bar
- Maximum dynamic pressure: 5 bar
- Maximum static pressure: 10 bar

Temperatures

- Factory preset temperature: 43°C
- Maximum hot water supply temperature: 80°C