

SELECTRONIC PREMIER STANDARD THERMOSTATIC SHOWER



Selectronic Premier thermostatic showers offer the highest level of temperature accuracy. This control technology combined with the many enhanced user features make them the perfect choice for Care Sector specification as well for piece of mind showering safety in any family home.


Key Features

- Highly accurate, temperature control to $\pm 0.5^{\circ}\text{C}$ for a safe and comfortable showering experience
- Push button controls with audible adjustment confirmation for ease of operation
- Large LED digital temperature display
- Phased shutdown safety protection for next user cool start up and scale protection
- 3 maximum temperature limiter lock options (40°C), (41°C), (43°C) or unlocked ($25 - 46^{\circ}\text{C}$) set at installation
- Simple push button rapid commissioning
- Data logger for user and performance analysis
- Right hand side multi-entry connection options
- 5 spray mode shower head with easy rub-clean nozzles
- 540mm stainless steel riser rail with 4-point fixing rail brackets
- 1.25 metre anti-kink flexible shower hose, adjustable handset clamp, soap dish and shower hose retaining ring

Product Range

Item Code:	Model No:	Description	kW
100054	RSELP85S	Selectronic Premier Standard	8.5
100061	RSELP95S	Selectronic Premier Standard	9.5
100078	RSELP108S	Selectronic Premier Standard	10.8

Dimensions:

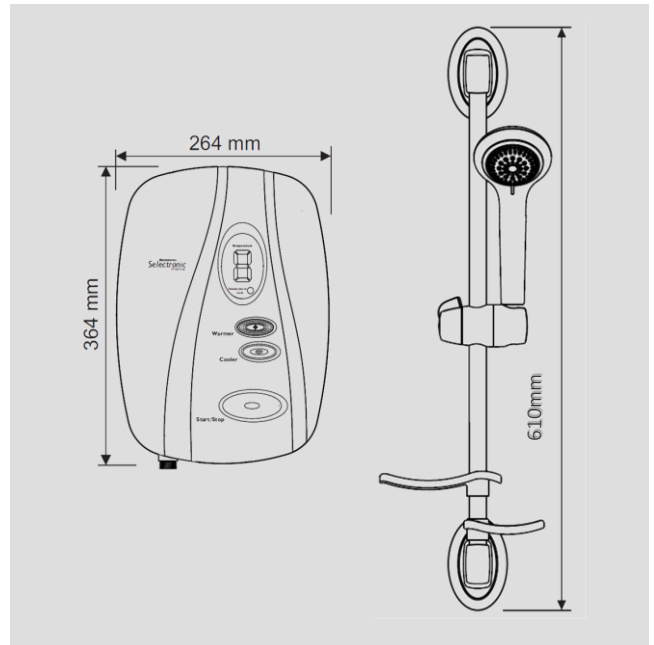


Technical Details

Model	RSELP85S	RSELP95S	RSELP108S
Item Code	100054	100061	100078
EAN /Bar Code No.	5011139100054	5011139100061	5011139100078
Output (kW)	8.5	9.5	10.8
Current Rating (Amps)	36	40	45
Energy Rating (Class)	A	A	A
Energy Rating (%)	37	37	37
Consumption (kWh/A)	495	488	489
Load Profile	XS	XS	XS
Sound (dB)	15	15	15
Running Pressure psi (bar)	10(0.7) - 140(10)	10(0.7) - 140(10)	10(0.7) - 140(10)
Temp Control Accuracy	$\pm 0.5^{\circ}\text{C}$	$\pm 0.5^{\circ}\text{C}$	$\pm 0.5^{\circ}\text{C}$
Start-up Temperatures	40, 41 or 43°C	40, 41 or 43°C	40, 41 or 43°C
Temperature Range	$25 - 46^{\circ}\text{C}$	$25 - 46^{\circ}\text{C}$	$25 - 46^{\circ}\text{C}$
IP Rating	IPX5	IPX5	IPX5
Approvals / Mark	BEAB & CE	BEAB & CE	BEAB & CE
UK Warranty (years)	5*	5*	5*

* Subject to product registration within 30 days.

SELECTRONIC PREMIER STANDARD THERMOSTATIC SHOWER

Power and Water Connectivity

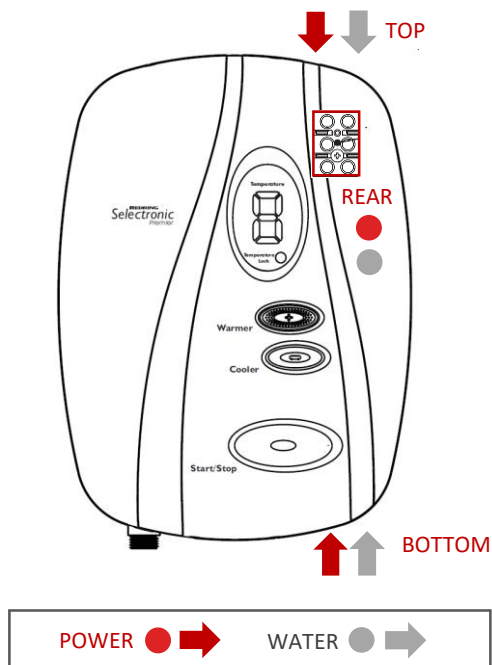

Product Packaging Data


Model	RSELP85S / 95S / 108S
Item Code:	100054 / 61 / 78
Box dimensions (mm)	580 x 325 x 145
Shower gross weight (Kg)	4.5
Shower unit net weight (Kg)	3.8
Full pallet quantity	60
Showers per layer	6

Certification

BEAB Approved	YES
BEAB CARE Approved	YES
RNIB Inclusive Design Endorsed	YES
WRAS Approved	YES
CE Marked	YES

Pack Contents

- 1 x Instant Electric Thermostatic Shower Unit
- Shower accessory kit comprising of:
 - 1 x 540mm long 22mm diameter riser rail with 4-point fixing riser rail brackets
 - 1 x 5 mode easy rub-clean showerhead
 - 1 x 1.25m anti-kink flexible shower hose
 - 1 x Adjustable shower head holder clamp
 - 1 x Soap dish
 - 1 x Shower hose retaining ring
- 1 x Screw and wall plug fixing pack
- 1 x ErP energy rating label
- 1 x Installation and user guide

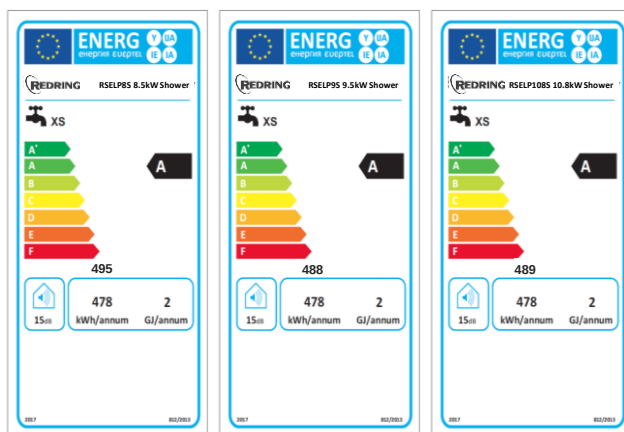

* Subject to product registration within 30 days.