

Solano® Eco

Industrial | Workshops | Leisure and sport | Retail | Showroom



A modern and lightweight hydronic fan-assisted unit. Eco to heat open areas such as gyms, schools halls, workshops and showrooms, and Eco MAX for larger open spaces such as industrial units, factories and warehouses

Lightweight for easy installation from <11kg to 25.5kg

High performance heat output up to 93.9kW

Air volumes up to 5700 m³/h and 3 speed fan

Attractive design


Solano Eco MAX version developed for use with heat pumps

Controls



Panel COMFORT

- Manual temperature regulation
- Fan speed change
- Ventilation in summer season
- Control up to 3 pcs of HEATER



Panel INTELLIGENT

- Weekly thermostat
- Automatic change of fan speed depending on room temperature
- BMS communication
- Control up to 2 pcs of HEATER



Splitter MULTI 6


- Control up to 6 pcs of HEATER

As part our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated. Please visit our website for the most up to date information.

Issue 002 | January 2024

+44 (0) 1245 324 900 | sales@smithsep.co.uk | SmithsEP.co.uk

Dimensions

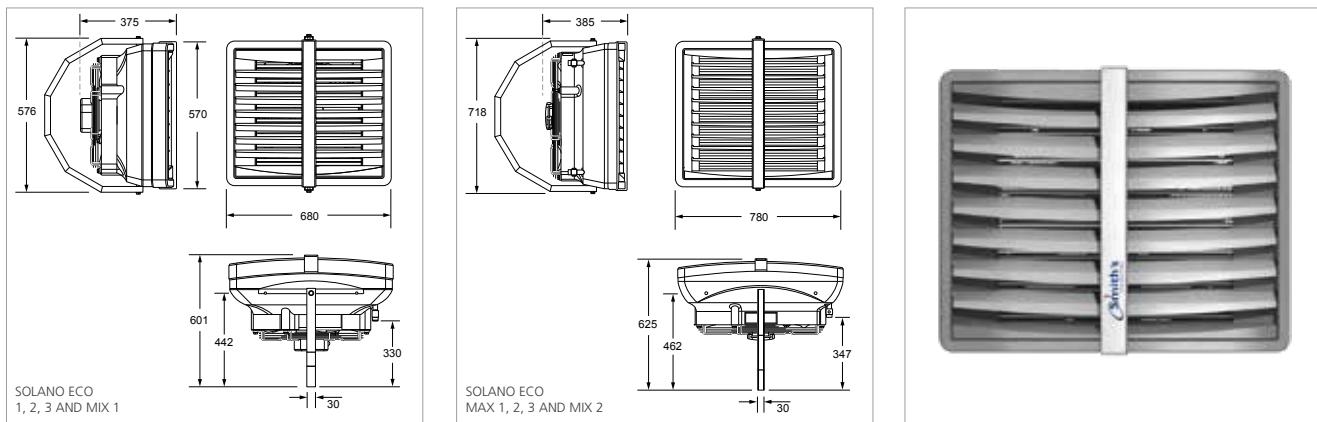

Technical Data

Heat Outputs For other heat output data please download the data sheet from our website

		Heater Eco 1	Heater Eco 2	Heater Eco 3	Heater Eco MAX 1	Heater Eco MAX 2	Heater Eco MAX 3	Heater Eco MIX 1	Heater Eco MIX 2
Heat output range*	kW	10-35	15-50	20-70	25-70	35-95	40-120	-	-
Heat output (90/70°C) / ΔT air temperature increase**	kW/°C	23kW/18°C	39kW/33°C	50kW/48°C	55kW/30°C	74kW/49°C	94kW/60°C	-	-
Heat output (70/50°C) / ΔT air temperature increase**	kW/°C	16kW/13°C	26kW/22°C	35kW/34°C	40kW/22°C	53kW/35°C	68kW/44°C	-	-
Heat output (50/30°C) / ΔT air temperature increase**	kW/°C	9kW/8°C	13kW/11°C	20kW/20°C	25kW/14°C	32kW/21°C	42kW/27°C	-	-
Max air output - III speed	m³/h	3900	3350	2950	5700	5600	5100	4800	7200
Sound level I/I/III speed****	dB (A)	44/52/62	41/50/60	39/48/60	41/50/59	40/48/58	40/48/58	36/44/54	31/42/49
Number of coil rows	-	1	2	3	2	3	3	-	-
Max working pressure	Mpa			1.6			1.6	-	-
Max airflow range*****	m	24	21	19	26	25	23	13***	16***
Diameter of connection nozzles	inches			3/4"			3/4"	-	-
Power supply	V/Hz A			230/50 1.08A			230/50 2.2A	230/50 1.08A	230/50 2.2A
Motor power	W			250			520	250	520
Motor speed	rpm			1350			1380	1350	1380
Protection class IP	-			IP54			IP54		IP54
Weight without water/with water	kg	10.8/11.9	12.7/14.8	14.5/16.9	23.6/25.2	25.2/27.4	25.5/28	9.2	15.8

* Presented heat output for water agent temperature range 50/30°C - 120 - 90°C, air inlet temperature 0°C, III speed

** For air inlet temperature 0°C

*** Max height of installation for vertical airflow, max working area 380m² for HEATER MIX 1 and 450m² for HEATER MAX 2

**** Measured in distance of 5m

***** Horizontal range of isothermal steam at velocity of 0.5m/s

Technical Data

Heater Eco 1

inlet/outlet water temperature		water 50/30 °C					water 60/40 °C					water 70/50 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 3900 m³/h (speed 3)																
heat output	kW	8.7	7.1	5.4	3.6	1.7	12.4	10.8	9.3	7.7	6.1	16.0	14.4	12.9	11.3	9.7
outlet air temperature	°C	7.3	10.5	14.2	17.8	21.3	10.2	14.4	18.5	22.7	26.9	12.8	16.9	21.2	25.3	29.4
water flow	m³/h	0.4	0.3	0.2	0.2	0.1	0.5	0.5	0.4	0.3	0.3	0.7	0.6	0.6	0.5	0.4
pressure drop	kPa	2.8	1.9	1.2	0.6	0.2	4.8	3.8	2.9	2.1	1.4	7.1	5.9	4.8	3.8	2.9
Mid speed - Air flow 2500 m³/h (speed 2)																
heat output	kW	6.7	5.5	4.2	2.1	1.5	9.7	8.5	7.2	6.0	4.7	12.5	11.3	10.0	8.8	7.6
outlet air temperature	°C	8.8	11.6	15.0	17.6	21.8	12.4	16.3	20.2	24.1	28.0	15.6	19.5	23.3	27.2	31.1
water flow	m³/h	0.3	0.2	0.2	0.1	0.1	0.4	0.4	0.3	0.3	0.2	0.5	0.5	0.4	0.4	0.3
pressure drop	kPa	1.8	1.2	0.8	0.2	0.1	3.1	2.4	1.9	1.3	0.9	4.6	3.8	3.1	2.5	1.9
Low speed - Air flow 1850 m³/h (speed 1)																
heat output	kW	5.6	4.5	3.4	2.0	1.4	8.1	7.1	6.1	5.0	3.9	10.5	9.5	8.4	7.4	6.4
outlet air temperature	°C	9.9	12.4	15.5	18.2	22.3	14.0	17.8	21.5	25.1	28.6	17.7	21.4	25.1	28.7	32.3
water flow	m³/h	0.3	0.2	0.2	0.1	0.1	0.4	0.3	0.3	0.2	0.2	0.5	0.4	0.4	0.3	0.3
pressure drop	kPa	1.3	0.9	0.5	0.2	0.1	2.3	1.8	1.4	1.0	0.6	3.4	2.8	2.3	1.8	1.4
inlet/outlet water temperature		water 80/60 °C					water 90/70 °C					water 120/90 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 3900 m³/h (speed 3)																
heat output	kW	21.1	19.4	17.6	15.9	14.2	23.0	21.4	19.7	17.9	16.1	37.9	35.9	33.9	31.9	29.9
outlet air temperature	°C	17.2	21.7	26.3	30.8	35.5	18.0	25.8	30.7	35.5	40.3	30.7	36.0	41.3	46.6	51.9
water flow	m³/h	0.8	0.8	0.7	0.6	0.6	0.8	0.8	0.7	0.7	0.6	0.9	0.8	0.8	0.7	0.7
pressure drop	kPa	9.7	8.4	7.1	5.9	4.8	9.7	8.7	7.7	6.8	5.9	9.4	8.5	7.7	6.9	6.1
Mid speed - Air flow 2500 m³/h (speed 2)																
heat output	kW	16.4	15.1	13.8	12.4	11.1	21.0	19.5	18.1	16.6	15.2	29.6	28.0	26.5	24.9	23.4
outlet air temperature	°C	20.9	25.2	29.4	33.7	38.0	25.6	30.1	34.6	39.0	43.6	37.4	42.3	47.3	52.2	57.3
water flow	m³/h	0.7	0.6	0.5	0.5	0.4	0.8	0.7	0.7	0.6	0.6	0.7	0.6	0.6	0.6	0.5
pressure drop	kPa	6.3	5.4	4.6	3.8	3.1	8.0	7.1	6.2	5.3	4.5	6.0	5.5	4.9	4.4	4.0
Low speed - Air flow 1850 m³/h (speed 1)																
heat output	kW	13.8	12.7	11.6	10.4	9.3	17.6	16.4	15.2	14.0	12.8	24.8	23.5	22.2	20.9	19.6
outlet air temperature	°C	23.6	27.7	31.8	35.8	39.8	29.0	33.2	37.5	41.8	45.9	42.3	47.0	51.8	56.4	61.2
water flow	m³/h	0.5	0.5	0.5	0.4	0.4	0.6	0.6	0.6	0.5	0.5	0.6	0.5	0.5	0.5	0.4
pressure drop	kPa	4.6	3.9	3.3	2.8	2.3	5.9	5.2	4.5	3.9	3.3	4.4	4.0	3.6	3.2	2.9

Technical Data

Heater Eco 2

inlet/outlet water temperature		water 50/30 °C					water 60/40 °C					water 70/50 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 3350 m³/h (speed 3)																
heat output	kW	12.5	10.5	8.4	6.1	2.8	19.6	17.3	15.0	12.6	10.2	26.2	23.7	21.3	18.8	16.3
outlet air temperature	°C	10.7	14.3	16.9	19.5	21.9	16.6	19.0	21.2	23.5	25.8	22.1	24.6	27.1	29.5	32.0
water flow	m³/h	0.7	0.6	0.5	0.3	0.2	1.0	0.8	0.7	0.6	0.5	1.2	1.1	1.0	0.9	0.8
pressure drop	kPa	4.4	3.2	2.1	1.2	0.3	7.2	5.8	4.4	3.3	2.2	10.5	8.8	7.2	5.8	4.5
Mid speed - Air flow 2000 m³/h (speed 2)																
heat output	kW	9.1	7.6	6.0	4.2	2.4	14.2	12.6	10.9	9.2	7.4	19.0	17.2	15.5	13.7	11.9
outlet air temperature	°C	12.9	19.4	21.4	23.0	24.5	20.2	22.1	23.9	25.8	27.7	26.9	28.9	30.9	33.0	35.0
water flow	m³/h	0.5	0.4	0.3	0.2	0.1	0.7	0.6	0.5	0.4	0.4	0.9	0.8	0.7	0.6	0.5
pressure drop	kPa	2.5	1.8	1.2	0.6	0.2	4.1	3.3	2.5	1.9	1.3	5.9	4.9	4.1	3.3	2.6
Low speed - Air flow 1450 m³/h (speed 1)																
heat output	kW	7.3	6.1	4.8	2.9	2.1	11.5	10.2	8.8	7.4	6.0	15.3	13.9	12.5	11.1	9.6
outlet air temperature	°C	14.4	21.0	22.5	22.6	25.5	22.5	24.1	25.8	27.3	28.8	29.9	31.7	33.5	35.2	37.0
water flow	m³/h	0.4	0.3	0.3	0.2	0.1	0.6	0.5	0.4	0.4	0.3	0.7	0.6	0.6	0.5	0.4
pressure drop	kPa	1.7	1.2	0.8	0.3	0.2	2.8	2.2	1.7	1.3	0.9	4.0	3.4	2.8	2.2	1.8
inlet/outlet water temperature		water 80/60 °C					water 90/70 °C					water 120/90 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 3350 m³/h (speed 3)																
heat output	kW	32.5	30.0	27.5	24.9	22.4	39.3	36.7	34.0	31.4	28.8	53.4	50.7	48.0	45.3	42.6
outlet air temperature	°C	27.2	29.7	32.2	34.8	37.3	32.4	35.0	37.6	40.2	42.7	45.0	47.6	50.4	53.1	55.9
water flow	m³/h	1.5	1.3	1.2	1.1	1.0	1.7	1.6	1.5	1.4	1.2	1.5	1.4	1.3	1.3	1.2
pressure drop	kPa	14.1	12.2	10.4	8.8	7.2	18.2	16.0	14.0	12.1	10.4	13.6	12.4	11.2	10.1	9.0
Mid speed - Air flow 2000 m³/h (speed 2)																
heat output	kW	23.5	21.7	19.9	18.1	16.3	28.4	26.5	24.6	22.7	20.9	38.6	36.7	34.8	32.8	30.9
outlet air temperature	°C	32.9	35.0	37.1	39.2	41.3	39.2	41.4	43.5	45.6	47.8	54.5	56.7	59.0	61.2	63.4
water flow	m³/h	1.1	1.0	0.9	0.8	0.7	1.2	1.1	1.1	1.0	0.9	1.1	1.0	1.0	0.9	0.9
pressure drop	kPa	7.9	6.8	5.8	4.9	4.1	10.1	8.9	7.8	6.8	5.8	7.6	6.9	6.3	5.7	5.1
Low speed - Air flow 1450 m³/h (speed 1)																
heat output	kW	19.0	17.5	16.1	14.6	13.2	22.9	21.4	19.9	18.4	16.9	31.2	29.6	28.1	26.5	25.0
outlet air temperature	°C	36.6	38.4	40.2	42.1	43.9	43.5	45.4	47.3	49.2	51.1	60.6	62.5	64.6	66.5	68.4
water flow	m³/h	0.8	0.8	0.7	0.7	0.6	1.0	0.9	0.9	0.8	0.7	0.9	0.8	0.8	0.7	0.7
pressure drop	kPa	5.4	4.7	4.0	3.4	2.8	6.9	6.1	5.3	4.6	4.0	5.2	4.7	4.3	3.9	3.5

Technical Data

Heater Eco 3

inlet/outlet water temperature		water 50/30 °C					water 60/40 °C					water 70/50 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 2950 m³/h (speed 3)																
heat output	kW	20.0	17.0	14.0	10.8	7.2	27.9	24.8	21.7	18.6	15.3	35.3	32.1	29.0	25.8	22.6
outlet air temperature	°C	20.1	21.5	22.8	24.0	24.9	27.2	28.8	30.2	31.6	33.0	34.2	35.8	37.3	38.7	40.2
water flow	m³/h	1.0	0.9	0.7	0.5	0.4	1.3	1.2	1.0	0.9	0.7	1.7	1.5	1.4	1.2	1.1
pressure drop	kPa	7.9	5.9	4.1	2.6	1.3	12.5	10.1	8.0	6.0	4.3	17.8	15.0	12.5	10.1	8.0
Mid speed - Air flow 1700 m³/h (speed 2)																
heat output	kW	13.5	11.5	9.4	7.2	3.9	18.7	16.7	14.6	12.6	10.4	23.6	21.5	19.5	17.4	15.3
outlet air temperature	°C	23.9	24.8	25.5	26.3	27.0	32.3	33.2	34.2	35.1	35.9	40.4	41.4	42.4	43.4	44.4
water flow	m³/h	0.7	0.6	0.5	0.4	0.2	0.9	0.8	0.7	0.6	0.5	1.1	1.0	0.9	0.8	0.7
pressure drop	kPa	3.9	2.9	2.0	1.3	0.4	6.1	5.0	3.9	3.0	2.1	8.6	7.3	6.1	5.0	3.9
Low speed - Air flow 1200 m³/h (speed 1)																
heat output	kW	10.4	8.8	7.2	5.4	3.4	14.4	12.9	11.3	9.7	8.0	18.1	16.6	15.0	13.4	11.8
outlet air temperature	°C	26.1	27.9	29.6	31.1	32.3	35.2	36.0	36.6	37.1	37.6	44.0	44.7	45.5	46.2	46.9
water flow	m³/h	0.5	0.4	0.4	0.3	0.2	0.7	0.6	0.5	0.5	0.4	0.9	0.8	0.7	0.6	0.6
pressure drop	kPa	2.4	1.8	1.3	0.8	0.3	3.8	3.1	2.5	1.9	1.3	5.4	4.6	3.8	3.1	2.5
inlet/outlet water temperature		water 80/60 °C					water 90/70 °C					water 120/90 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 2950 m³/h (speed 3)																
heat output	kW	42.5	39.4	36.2	33.0	29.8	50.1	46.9	43.6	40.4	37.2	67.1	63.8	60.5	57.2	54.0
outlet air temperature	°C	41.0	42.6	44.1	45.7	47.2	47.9	49.5	51.0	52.6	54.1	63.5	65.0	66.5	68.0	69.5
water flow	m³/h	2.0	1.8	1.7	1.5	1.4	2.3	2.1	2.0	1.9	1.7	2.0	1.9	1.8	1.7	1.6
pressure drop	kPa	23.6	20.5	17.6	14.9	12.4	29.9	26.5	23.3	20.3	17.5	22.5	20.6	18.7	16.9	15.2
Mid speed - Air flow 1700 m³/h (speed 2)																
heat output	kW	28.3	26.3	24.2	22.1	20.0	33.3	31.2	29.1	27.0	24.9	44.7	42.5	40.4	38.2	36.1
outlet air temperature	°C	48.3	49.3	50.4	51.4	52.4	56.2	57.3	58.4	59.4	60.5	74.6	75.6	76.7	77.7	78.7
water flow	m³/h	1.3	1.2	1.1	1.0	0.9	1.5	1.4	1.3	1.2	1.1	1.4	1.3	1.2	1.2	1.1
pressure drop	kPa	11.3	9.9	8.5	7.2	6.1	14.3	12.7	11.2	9.8	8.5	10.8	9.9	9.0	8.2	7.4
Low speed - Air flow 1200 m³/h (speed 1)																
heat output	kW	21.7	20.2	18.6	17.0	15.4	25.5	23.9	22.3	20.7	19.1	34.2	32.6	31.0	29.4	27.8
outlet air temperature	°C	54.2	53.3	54.0	54.8	55.5	60.4	61.1	61.9	62.7	63.4	79.6	80.4	81.2	81.9	82.7
water flow	m³/h	1.0	0.9	0.9	0.8	0.7	1.2	1.1	1.0	0.9	0.9	1.0	1.0	0.9	0.9	0.8
pressure drop	kPa	7.0	6.1	5.3	4.5	3.8	8.8	7.9	6.9	6.1	5.3	6.7	6.1	5.6	5.1	4.6

Technical Data

Heater Eco MAX 1

inlet/outlet water temperature		water 50/30 °C					water 60/40 °C					water 70/50 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 5700 m³/h (speed 3)																
heat output	kW	24.5	20.5	16.5	12.3	7.5	32.2	28.3	24.5	20.6	16.7	39.7	35.9	32.0	28.3	24.5
outlet air temperature	°C	13.7	16.8	19.8	22.7	25.0	18.0	21.1	24.2	27.3	30.2	22.3	25.5	28.6	31.7	34.8
water flow	m³/h	0.8	0.6	0.5	0.4	0.2	1.0	0.9	0.8	0.7	0.5	1.3	1.2	1.0	0.9	0.8
pressure drop	kPa	3.5	2.5	1.7	0.9	0.3	5.8	4.6	3.5	2.6	1.8	8.4	7.0	5.7	4.5	3.5
Mid speed - Air flow 3900 m³/h (speed 2)																
heat output	kW	19.6	16.4	13.1	9.7	4.4	25.7	22.6	19.5	16.5	13.4	31.7	28.6	25.6	22.6	19.6
outlet air temperature	°C	15.9	18.6	21.3	23.7	24.4	20.9	23.7	26.6	29.2	31.8	25.9	28.8	31.6	34.5	37.2
water flow	m³/h	0.9	0.8	0.6	0.5	0.2	1.3	1.1	1.0	0.8	0.7	1.6	1.4	1.3	1.1	1.0
pressure drop	kPa	5.1	3.7	2.5	1.4	0.4	8.5	6.7	5.2	3.8	2.6	12.3	10.2	8.3	6.7	5.1
Low speed - Air flow 2800 m³/h (speed 1)																
heat output	kW	15.9	13.3	10.6	7.7	4.0	20.9	18.4	15.9	13.4	10.8	25.6	23.2	20.7	18.3	15.9
outlet air temperature	°C	18.0	20.4	22.7	24.5	25.4	23.6	26.2	28.7	31.0	33.3	29.2	31.9	34.5	37.0	39.4
water flow	m³/h	0.8	0.6	0.5	0.4	0.2	1.0	0.9	0.8	0.7	0.5	1.3	1.2	1.0	0.9	0.8
pressure drop	kPa	3.5	2.5	1.7	0.9	0.3	5.8	4.6	3.5	2.6	1.8	8.4	7.0	5.7	4.5	3.5
inlet/outlet water temperature		water 80/60 °C					water 90/70 °C					water 120/90 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 5700 m³/h (speed 3)																
heat output	kW	47.5	43.6	39.8	36.0	32.2	55.0	51.1	47.2	43.4	39.6	72.4	68.5	64.5	60.6	56.8
outlet air temperature	°C	26.0	29.2	32.3	35.4	38.4	30.1	33.3	36.4	39.5	42.6	39.3	42.6	45.9	49.1	52.2
water flow	m³/h	1.5	1.4	1.3	1.2	1.0	1.8	1.7	1.5	1.4	1.3	1.6	1.5	1.4	1.3	1.3
pressure drop	kPa	11.3	9.7	8.2	6.8	5.6	14.5	12.7	11.0	9.4	8.0	10.9	9.8	8.8	7.9	7.0
Mid speed - Air flow 3900 m³/h (speed 2)																
heat output	kW	37.8	34.7	31.7	28.7	25.7	43.7	40.6	37.6	34.5	31.5	57.4	54.3	51.1	48.0	45.0
outlet air temperature	°C	30.2	33.1	36.0	38.7	41.5	34.9	37.8	40.7	43.5	46.3	45.8	48.8	51.9	54.8	57.7
water flow	m³/h	1.9	1.8	1.6	1.4	1.3	2.2	2.1	1.9	1.8	1.6	2.0	1.9	1.8	1.7	1.5
pressure drop	kPa	16.6	14.2	12.0	10.0	8.2	21.4	18.7	16.2	13.9	11.8	16.1	14.5	13.0	11.6	10.3
Low speed - Air flow 2800 m³/h (speed 1)																
heat output	kW	30.6	28.1	25.6	23.2	20.8	35.3	32.8	30.4	27.9	25.5	46.5	43.9	41.3	38.9	36.4
outlet air temperature	°C	34.0	36.8	39.3	41.8	44.2	39.3	42.0	44.6	47.1	49.7	51.5	54.5	57.2	59.9	62.5
water flow	m³/h	1.5	1.4	1.3	1.2	1.0	1.8	1.7	1.5	1.4	1.3	1.6	1.5	1.4	1.3	1.3
pressure drop	kPa	11.3	9.7	8.2	6.8	5.6	14.5	12.7	11.0	9.4	8.0	10.9	9.8	8.8	7.9	7.0

Technical Data

Heater Eco MAX 2

inlet/outlet water temperature		water 50/30 °C					water 60/40 °C					water 70/50 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 5600 m³/h (speed 3)																
heat output	kW	31.9	27.0	22.2	17.2	11.8	41.6	36.8	32.0	27.3	22.5	53.0	48.0	43.1	38.2	33.3
outlet air temperature	°C	20.9	24.8	28.4	31.9	35.1	27.3	31.4	35.5	39.3	43.2	35.0	39.3	43.3	47.4	51.3
water flow	m³/h	1.4	1.2	0.9	0.7	0.5	1.7	1.5	1.3	1.1	0.9	2.2	2.0	1.8	1.6	1.4
pressure drop	kPa	10.5	7.8	5.4	3.4	1.7	15.9	12.7	9.9	7.4	5.2	23.7	19.8	16.3	13.1	10.2
Mid speed - Air flow 3800 m³/h (speed 2)																
heat output	kW	25.3	21.4	17.5	13.5	9.0	32.9	29.1	25.3	21.6	17.8	41.9	37.9	34.0	30.2	26.4
outlet air temperature	°C	24.2	27.6	30.8	33.8	36.0	31.6	35.3	38.9	42.3	45.6	40.4	44.3	47.9	51.5	55.0
water flow	m³/h	1.1	0.9	0.7	0.6	0.4	1.4	1.2	1.1	0.9	0.7	1.7	1.6	1.4	1.3	1.1
pressure drop	kPa	6.9	5.1	3.6	2.2	1.1	10.4	8.3	6.5	4.8	3.4	15.4	12.9	10.6	8.5	6.7
Low speed - Air flow 2750 m³/h (speed 1)																
heat output	kW	20.1	17.3	14.1	10.8	6.1	26.5	23.5	20.4	17.4	14.4	33.7	30.5	27.4	24.3	21.2
outlet air temperature	°C	27.2	30.1	32.8	35.2	35.5	35.5	38.8	41.9	45.1	47.8	45.3	48.8	52.1	55.1	58.2
water flow	m³/h	0.9	0.7	0.6	0.5	0.3	1.1	1.0	0.9	0.7	0.6	1.4	1.3	1.1	1.0	0.9
pressure drop	kPa	4.7	3.5	2.4	1.5	0.5	7.0	5.6	4.4	3.3	2.3	10.4	8.7	7.2	5.8	4.5
inlet/outlet water temperature		water 80/60 °C					water 90/70 °C					water 120/90 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 5600 m³/h (speed 3)																
heat output	kW	61.9	57.0	52.1	47.3	42.5	74.2	69.0	63.9	58.9	53.9	96.6	91.4	86.3	81.2	76.2
outlet air temperature	°C	41.0	45.5	49.9	54.1	58.2	49.1	53.5	57.9	62.2	66.4	63.2	68.1	72.6	77.2	81.8
water flow	m³/h	2.6	2.4	2.2	2.0	1.8	3.1	2.8	2.6	2.4	2.2	2.6	2.5	2.4	2.2	2.1
pressure drop	kPa	30.1	25.9	22.0	18.4	15.2	40.3	35.3	30.7	26.5	22.5	28.9	26.1	23.5	21.0	18.7
Mid speed - Air flow 3800 m³/h (speed 2)																
heat output	kW	48.9	45.0	41.1	37.3	33.5	58.4	54.3	50.3	46.4	42.4	76.2	72.1	68.0	64.0	60.0
outlet air temperature	°C	47.4	51.5	55.4	59.2	62.9	56.5	60.6	64.6	68.4	72.1	72.9	77.4	81.7	85.8	89.8
water flow	m³/h	2.0	1.9	1.7	1.5	1.4	2.4	2.2	2.1	1.9	1.8	2.1	2.0	1.9	1.7	1.6
pressure drop	kPa	19.6	16.8	14.3	12.0	9.9	26.1	22.9	19.9	17.1	14.6	18.7	16.9	15.2	13.6	12.1
Low speed - Air flow 2750 m³/h (speed 1)																
heat output	kW	39.3	36.2	33.1	30.0	27.0	46.9	43.7	40.4	37.2	34.1	61.3	58.0	54.7	51.4	48.2
outlet air temperature	°C	53.2	56.8	60.3	63.7	67.1	63.1	66.8	70.5	73.9	77.3	81.7	85.8	89.7	93.5	97.1
water flow	m³/h	1.6	1.5	1.4	1.2	1.1	1.9	1.8	1.7	1.5	1.4	1.7	1.6	1.5	1.4	1.3
pressure drop	kPa	13.2	11.3	9.6	8.1	6.7	17.5	15.3	13.3	11.5	9.8	12.6	11.4	10.2	9.2	8.1

Technical Data

Heater Eco MAX 3

inlet/outlet water temperature		water 50/30 °C					water 60/40 °C					water 70/50 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 5100 m³/h (speed 3)																
heat output	kW	42.1	35.7	29.3	22.9	16.0	54.1	47.9	41.7	35.5	29.3	68.3	61.9	55.5	49.2	42.9
outlet air temperature	°C	26.9	29.8	32.6	35.3	37.6	34.7	38.1	41.2	44.3	47.1	44.1	47.5	50.6	53.8	56.8
water flow	m³/h	1.6	1.4	1.1	0.9	0.6	2.1	1.8	1.6	1.4	1.1	2.6	2.4	2.1	1.9	1.6
pressure drop	kPa	14.3	10.7	7.5	4.8	2.5	21.6	17.3	13.5	10.1	7.2	32.1	26.8	22.0	17.7	13.8
Mid speed - Air flow 3400 m³/h (speed 2)																
heat output	kW	32.3	27.4	22.5	17.5	12.1	41.4	36.7	32.0	27.3	22.5	52.2	47.2	42.4	37.6	32.9
outlet air temperature	°C	30.9	33.3	35.6	37.6	39.0	39.8	42.7	45.4	47.8	50.2	50.5	53.4	56.1	58.7	61.1
water flow	m³/h	1.2	1.1	0.9	0.7	0.5	1.6	1.4	1.2	1.0	0.9	2.0	1.8	1.6	1.4	1.3
pressure drop	kPa	8.9	6.6	4.6	2.9	1.5	13.3	10.7	8.3	6.3	4.4	19.6	16.4	13.5	10.9	8.5
Low speed - Air flow 2400 m³/h (speed 1)																
heat output	kW	25.3	21.5	17.6	13.6	9.0	32.4	28.7	25.0	21.4	17.7	40.7	36.9	33.1	29.4	25.7
outlet air temperature	°C	34.4	36.4	38.1	39.4	39.7	44.4	46.7	49.0	51.0	52.8	56.1	58.4	60.7	62.9	64.9
water flow	m³/h	1.0	0.8	0.7	0.5	0.3	1.2	1.1	1.0	0.8	0.7	1.6	1.4	1.3	1.1	1.0
pressure drop	kPa	5.7	4.2	3.0	1.9	0.9	8.6	6.9	5.4	4.0	2.9	12.5	10.5	8.6	6.9	5.4
inlet/outlet water temperature		water 80/60 °C					water 90/70 °C					water 120/90 °C				
inlet air temperature	°C	0	5	10	15	20	0	5	10	15	20	0	5	10	15	20
High speed - Air flow 5100 m³/h (speed 3)																
heat output	kW	79.5	73.1	66.8	60.6	54.4	93.9	87.3	80.8	74.4	68.0	121.6	115.0	108.4	101.9	95.5
outlet air temperature	°C	51.0	54.5	57.9	61.2	64.5	60.1	63.6	67.0	70.4	73.5	78.0	81.8	85.5	89.2	92.6
water flow	m³/h	3.0	2.8	2.6	2.3	2.1	3.6	3.4	3.1	2.9	2.6	3.1	3.0	2.8	2.6	2.5
pressure drop	kPa	40.8	35.1	29.8	24.9	20.5	54.3	47.5	41.3	35.5	30.2	39.2	35.4	31.8	28.4	25.2
Mid speed - Air flow 3400 m³/h (speed 2)																
heat output	kW	60.6	55.8	51.0	46.2	41.5	71.5	66.4	61.5	56.6	51.7	92.8	87.7	82.6	77.7	72.8
outlet air temperature	°C	58.3	61.3	64.3	67.0	69.8	68.5	71.6	74.5	77.3	80.0	89.1	92.5	95.8	98.9	101.9
water flow	m³/h	2.3	2.1	1.9	1.8	1.6	2.7	2.6	2.4	2.2	2.0	2.4	2.3	2.1	2.0	1.9
pressure drop	kPa	25.0	21.4	18.2	15.3	12.6	33.0	28.9	25.1	21.6	18.3	23.9	21.6	19.4	17.3	15.4
Low speed - Air flow 2400 m³/h (speed 1)																
heat output	kW	47.3	43.5	39.7	36.1	32.4	55.6	51.6	47.8	44.0	40.2	72.3	68.3	64.4	60.5	56.7
outlet air temperature	°C	64.6	67.3	69.8	72.2	74.4	75.8	78.4	81.0	83.4	85.6	98.8	101.8	104.7	107.3	109.9
water flow	m³/h	1.8	1.7	1.5	1.4	1.2	2.1	2.0	1.8	1.7	1.5	1.9	1.8	1.7	1.6	1.5
pressure drop	kPa	15.9	13.6	11.6	9.7	8.0	20.9	18.3	15.9	13.6	11.6	15.2	13.7	12.3	11.0	9.7

Ordering Guide

Model	Wt (kg)	Product Codes	Accessories	Product Codes
SOLANO ECO 1 (Incl mounting bracket)	10.8/11.9	HPUH310030	SOLANO INSTALLATION BRACKET (ECO 1, 2, 3 AND MIX 1)	HPUH310005
SOLANO ECO 2 (Incl mounting bracket)	12.7/14.8	HPUH310031	SOLANO MAX INSTALLATION BRACKET (MAX 1, 2, 3 AND MIX 2)	HPUH310037
SOLANO ECO 3 (Incl mounting bracket)	14.5/16.9	HPUH310032	PANEL INTELLIGENT THERMOSTAT	HPUH310008
SOLANO ECO MAX 1 (Incl mounting bracket)	23.6/25.2	HPUH310033	PANEL INTELLIGENT REMOTE SENSOR	HPUH310038
SOLANO ECO MAX 2 (Incl mounting bracket)	25.2/27.4	HPUH310034	PANEL COMFORT - SPEED REGULATION & THERMOSTAT	HPUH310009
SOLANO ECO MAX 3 (Incl mounting bracket)	25.5/28.0	HPUH310035	MULTI 6 SPLITTER	HPUH310010
SOLANO MIX 1 (Incl mounting bracket)	9.2	HPUH310004	ELASTIC CONNECTION FOR HEATING MEDIUM (PAIR)	HPUH310029
SOLANO MIX 2 (Incl mounting bracket)	15.8	HPUH310036	ACTUATOR TS LITE M30X1.5	HPUH310006
			VALVE ASP/SSP KVS 5,5	HPUH310007