


Dimensions - Tempest Direct

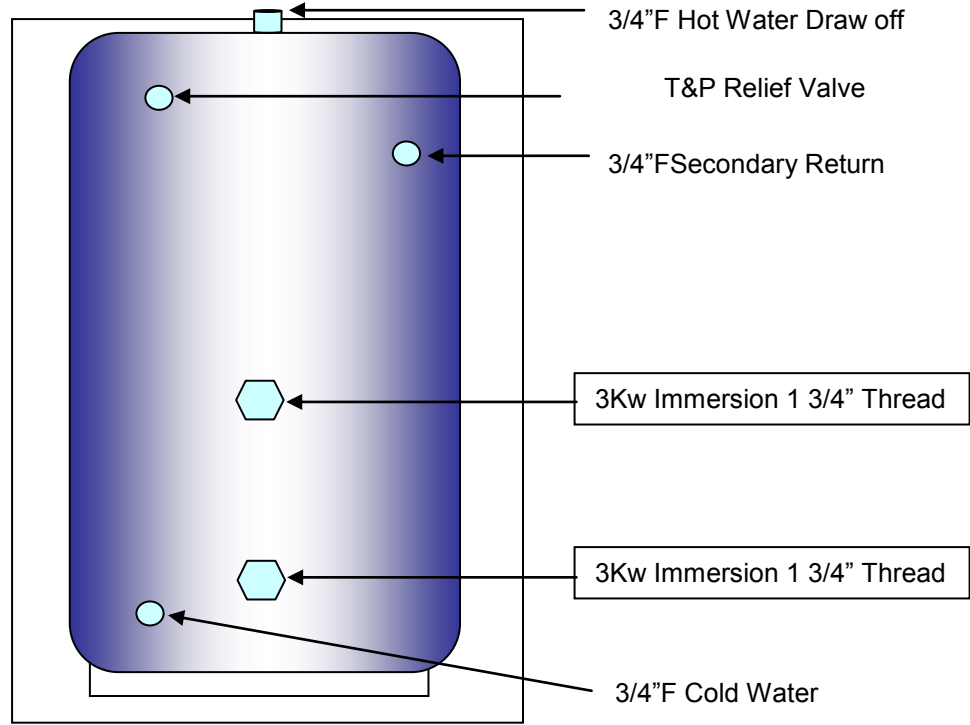

All dimensions are given in mm and are subject to change without notice.

Cap (L)	90	125	150	170	200	250	300	400	500
Height	750	935	1060	1200	1120	1330	1650	1590	1835
Dia	510	510	510	510	554	554	554	660	660

Connection Sizes	
120-300Ltr	3/4" Female BSP
400-500Ltr	1" Female BSP

Parts supplied
2 x 3Kw Immersion 240V single Phase
Expansion Vessel
Temp & Pressure Relief
3Bar Inlet Control Group

Foam Information
ODP Ozone Depletion potential = 0
GWP Global warming Potential = 2.2
Foam Type = Polyurethane
British Standard 1566,D:2002

Cap (L)	24Hrs Standing Heat Loss	Immersion Heater
125Ltr	1.21Kw/24Hrs	1x 3Kw 240v single phase
150Ltr	1.33Kw/24Hrs	1x 3Kw 240v single phase
170Ltr	1.62Kw/24Hrs	1x 3Kw 240v single phase
200Ltr	1.75Kw/24Hrs	1x 3Kw 240v single phase
250Ltr	2.10Kw/24Hrs	1x 3Kw 240v single phase
300Ltr	2.30Kw/24Hrs	1x 3Kw 240v single phase
400Ltr	2.94Kw/24Hrs	1x 3kw 240v Single phase
500Ltr	3.15Kw/24Hrs	1x 3Kw 240v Single phase